

ASSEMBLY K-SCALE 12" 20 I TFT TRASERO 9"  
C13986026



**GUIDELINE ASSEMBLY K-SCALE 12” 20 I TFT TRASERO 9”  
P/N.- C13986026**

1. ASSEMBLY BASE AND POWER ENTRY
2. ASSEMBLY POWER SUPPLIES AND SWITCH BOARD
3. ASSEMBLY CONNECTIONS BADGE
4. ASSEMBLY SET LOAD CELL
5. ASSEMBLY COLUMN
6. ASSEMBLY COVER
7. ASSEMBLY UP CROSS AND PUT PAN SCALE
8. ASSEMBLY BOTTOM CONSOLE
9. ASSEMBLY FAN
10. ASSEMBLY PC BOARD
11. ASSEMBLY HARD DISK
12. CONNECT CABLES
13. ASSEMBLY BACK MONITOR
14. ASSEMBLY UP CONSOLE AND FRONT 12" TOUCH SCREEN
15. ASSEMBLY SET PRINTER
16. ASSEMBLY COVERS AND FINISH

# 1.- ASSEMBLY BASE AND POWER ENTRY (COMPONENTS )


P/N.-  
71004431




P/N.-  
90113983



P/N.-  
90113962

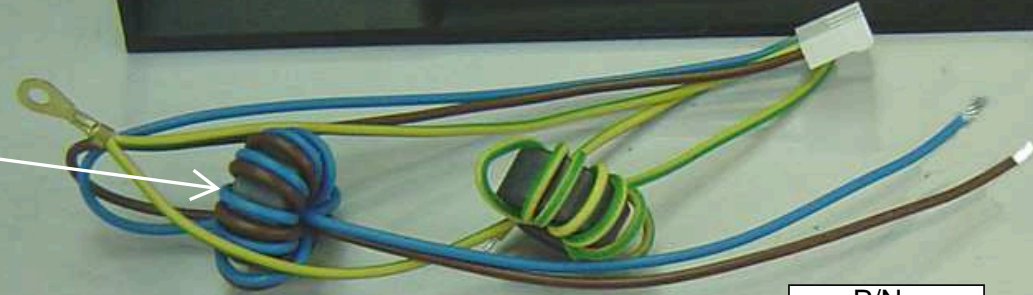

P/N.-  
99006101




P/N.-  
73100002 (2)




P/N.-  
72054017 (3)




P/N.-  
79900063  
(5)



P/N.-  
72091035  
(2)

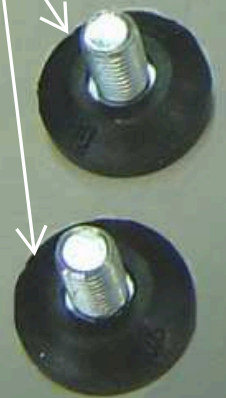

P/N.-  
72091051  
(2)

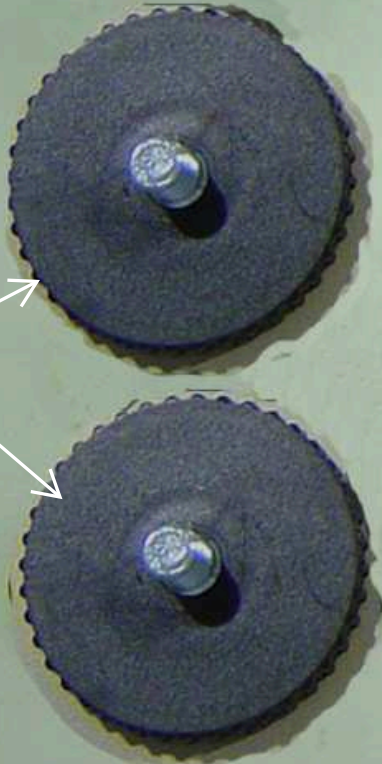

P/N.-  
72031015



P/N.-  
73120028



P/N.-  
90006017



# 1.- ASSEMBLY BASE AND POWER ENTRY (COMPONENTS )


P/N.- 70000456

P/N.-  
70000546

P/N.- 70010205



FUSE 3A

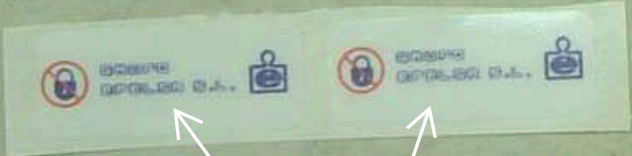


P/N.- 70010155 (2)

TIGHTEN TWO FEET P/N.-  
72091051

ASSEMBLY PIECE  
P/N.- 71004431

P/N.-  
71002288

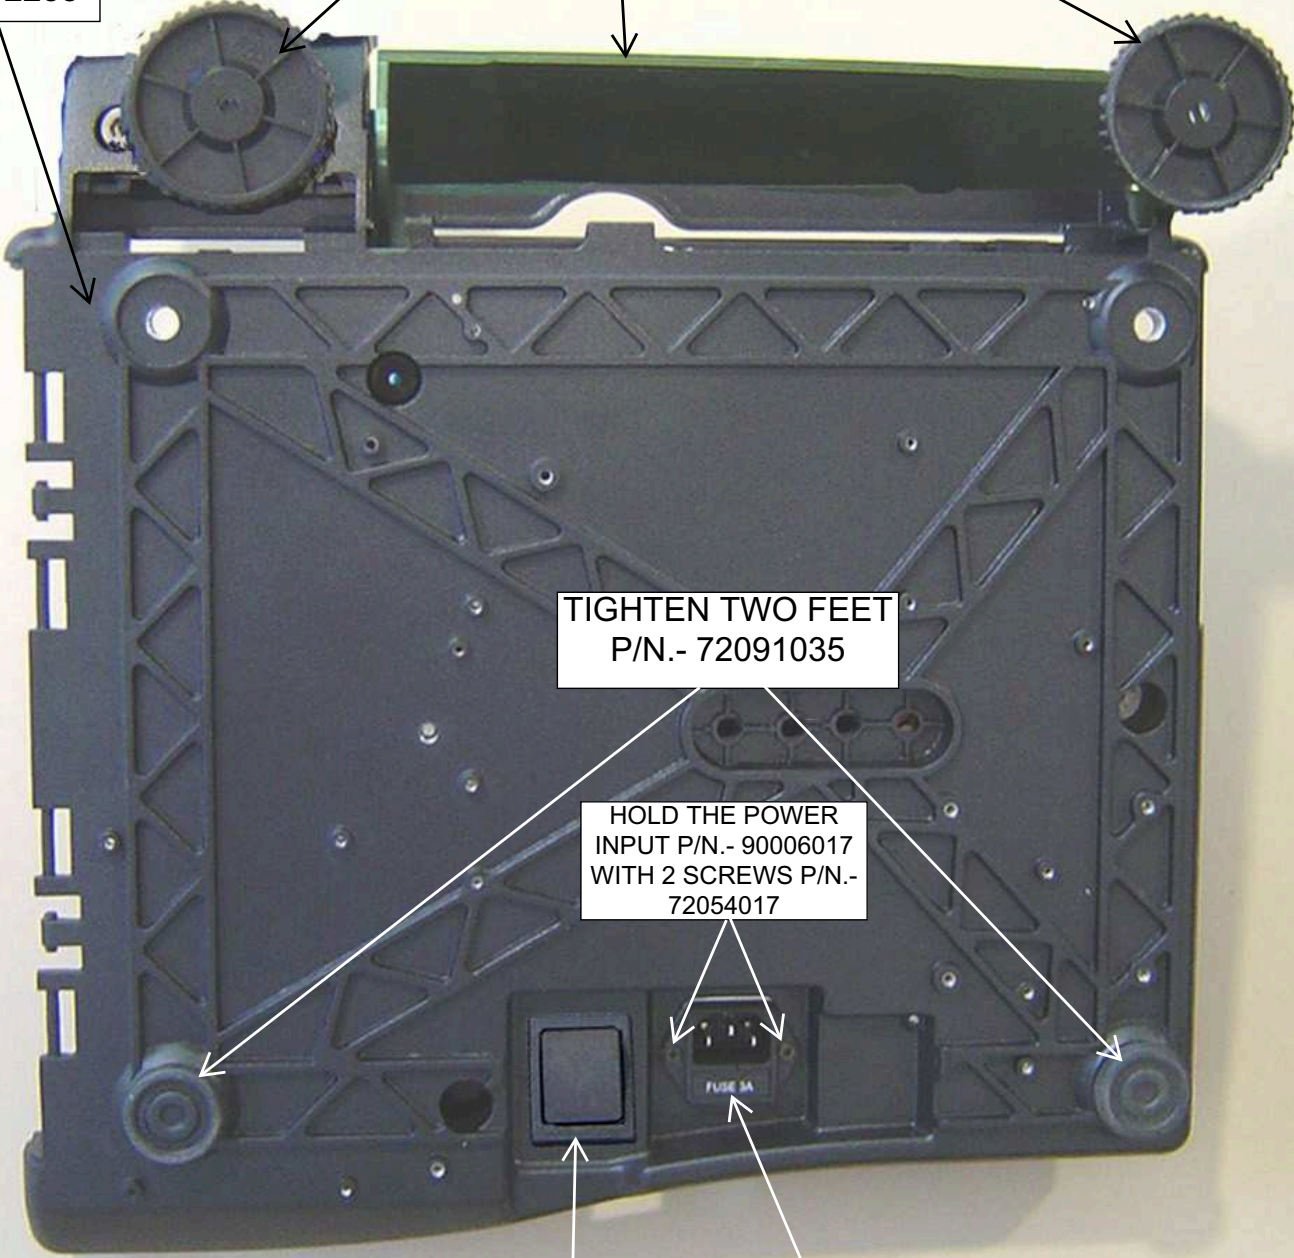

TIGHTEN TWO FEET  
P/N.- 72091035

HOLD THE POWER  
INPUT P/N.- 90006017  
WITH 2 SCREWS P/N.-  
72054017

ASSEMBLY ON /  
OFF PUSH P/N.-  
99006101

PASTE THE STICK  
P/N.- 70010205

HOLD WITH  
FLANGES P/  
N.-73100002  
THE FERRITES

HOLD THE  
CABLES  
WITH  
FLANGES


SOLDER THE  
CABLE P/N.-  
90113962 PUTTING  
SHRINK P/N.-  
79900063

SOLDER CABLE  
P/N.- 90113983  
PUTTING  
SHRINK P/N.-  
79900063

PUT SUPPORT  
FLANGE P/N.-  
73120028 WITH  
SCREW P/N.-  
72054017

HOLD THE  
GROUND  
TERMINAL  
WITH SCREW  
P/N.-  
72031015

PASTE THE  
STICK P/N.-  
70000546

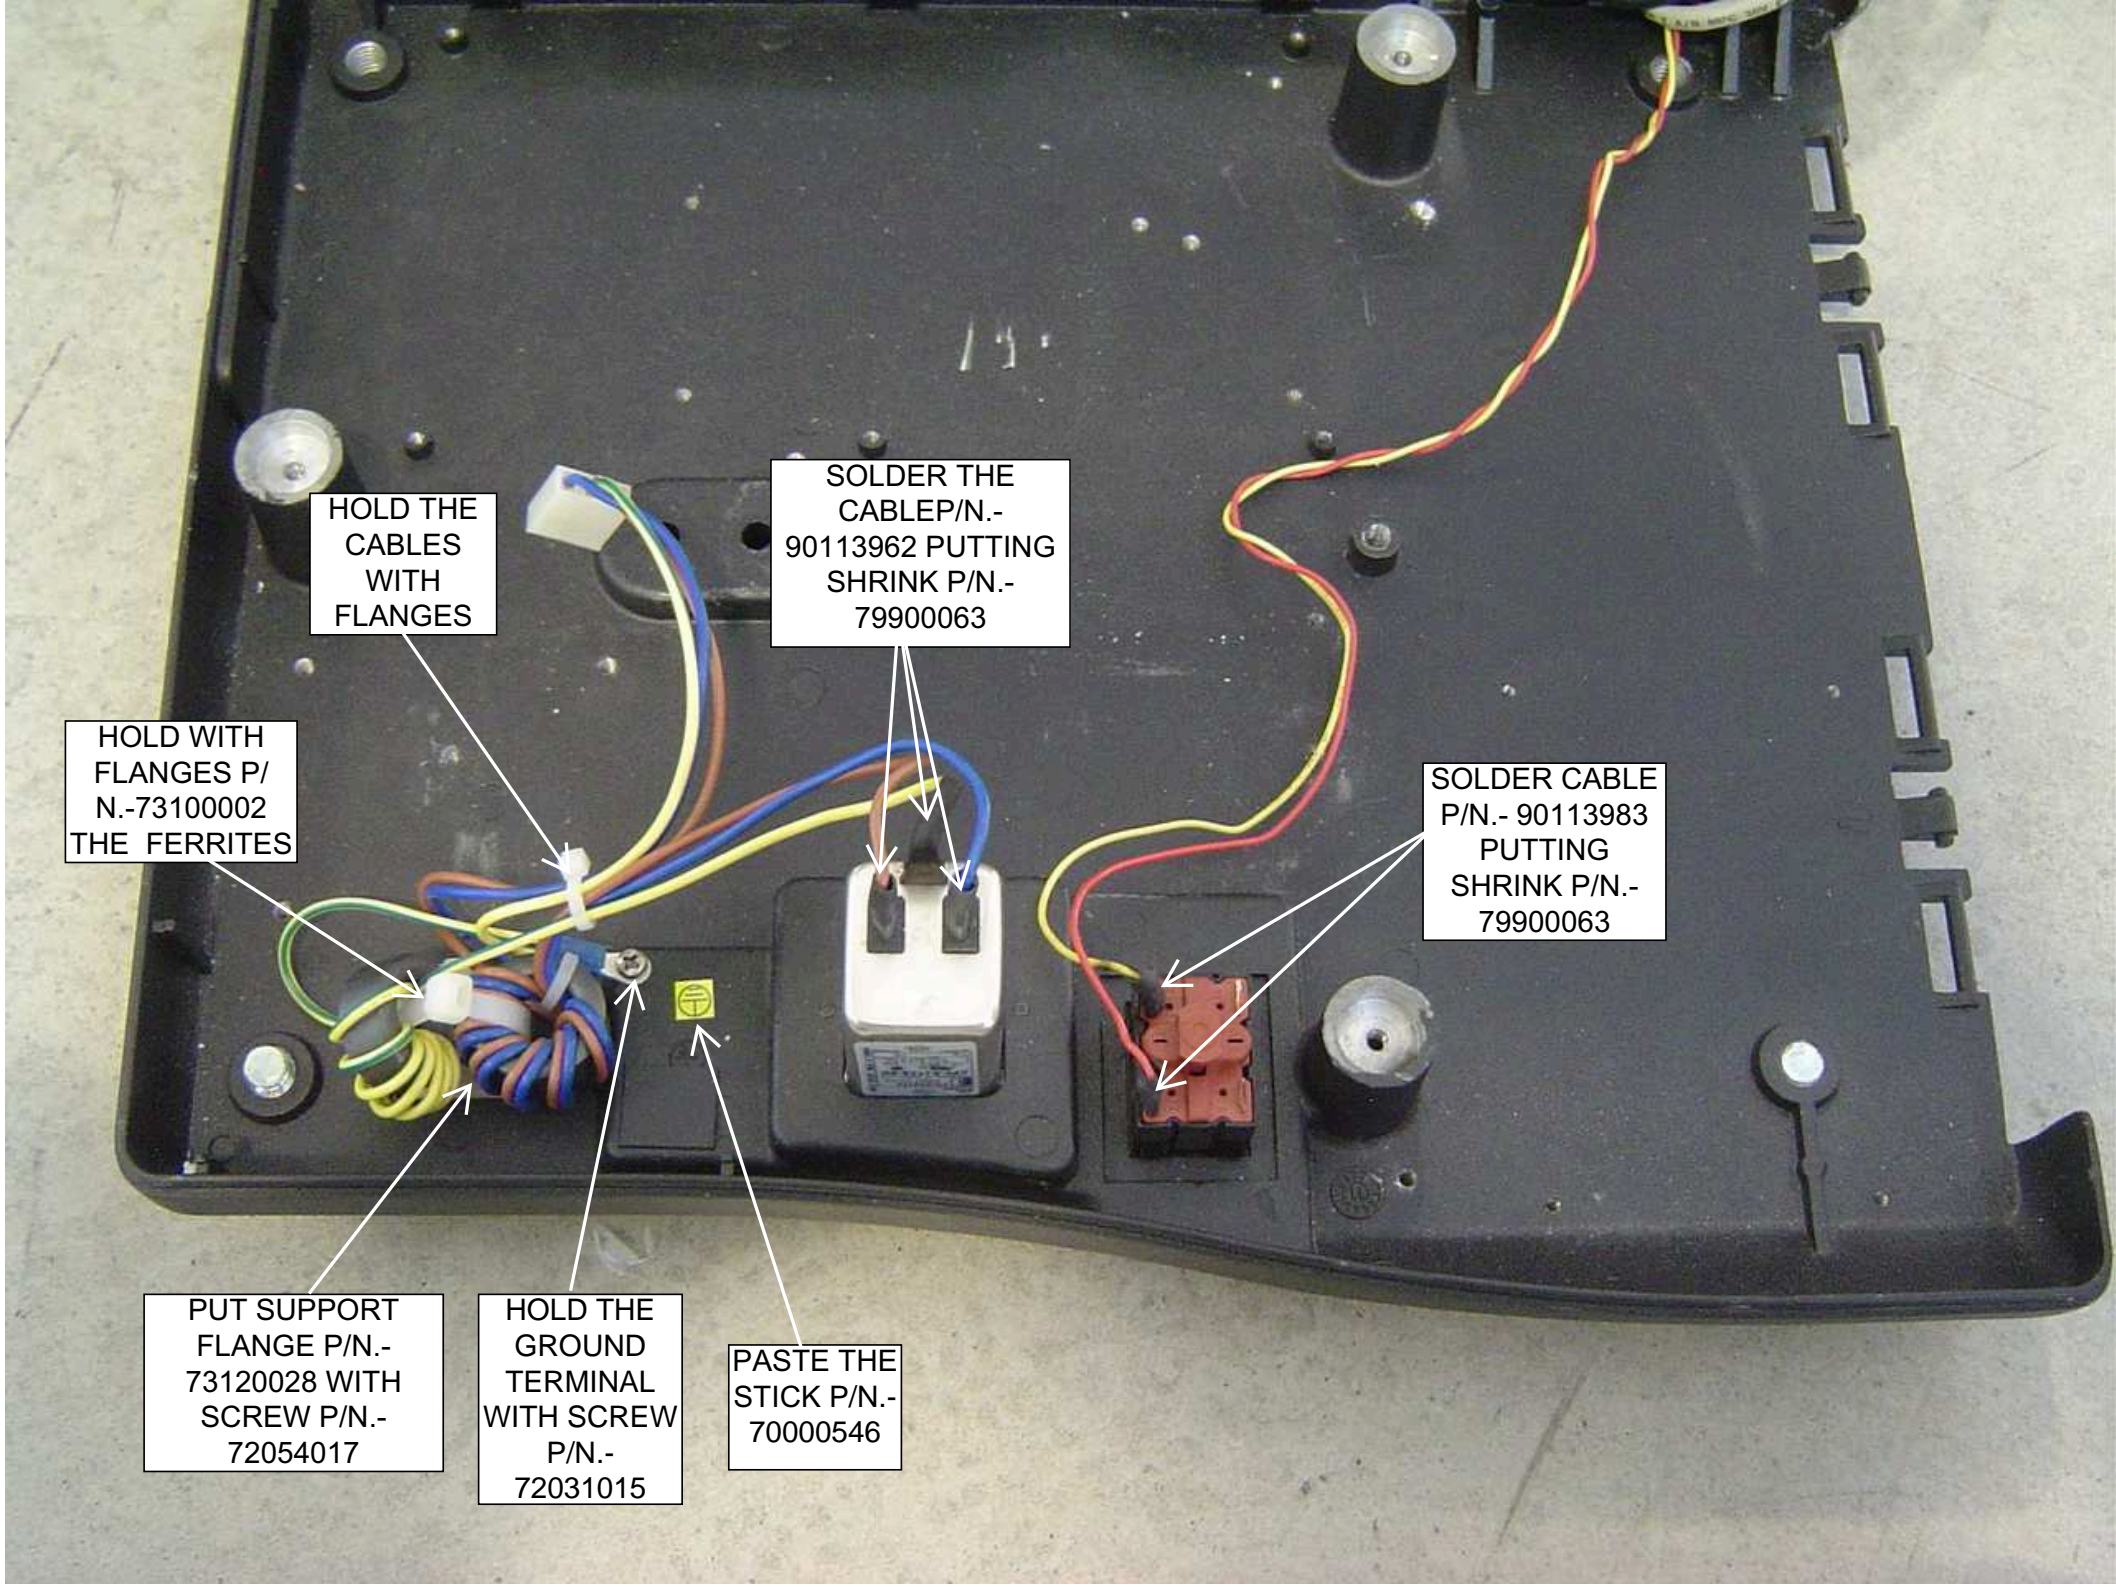

## 2.- ASSEMBLY POWER SUPPLIES AND SWITCH BOARD (COMPONENTS)

P/N.-  
72031015 (2)



P/N.-  
73050004  
(2)



P/N.-  
72031016  
(2)




P/N.- 72091008  
(NYLON SCREW )




P/N.-  
72031026



P/N.-  
71100003  
(4)



P/N.-  
73100002  
(2)



P/N.-  
71210408  
(2)



P/N.-  
19052165



P/N.-  
19052167



P/N.-  
90113935



P/N.-  
19052155



CONNECT CABLE  
P/N.- 90113962

CONNECT CABLE  
P/N.- 90113935


P/N.- 72031015

P/N.-  
73050004

P/N.-  
73050004


PASTE THE  
STICK P/N.-  
70000456

P/N.-  
71210408

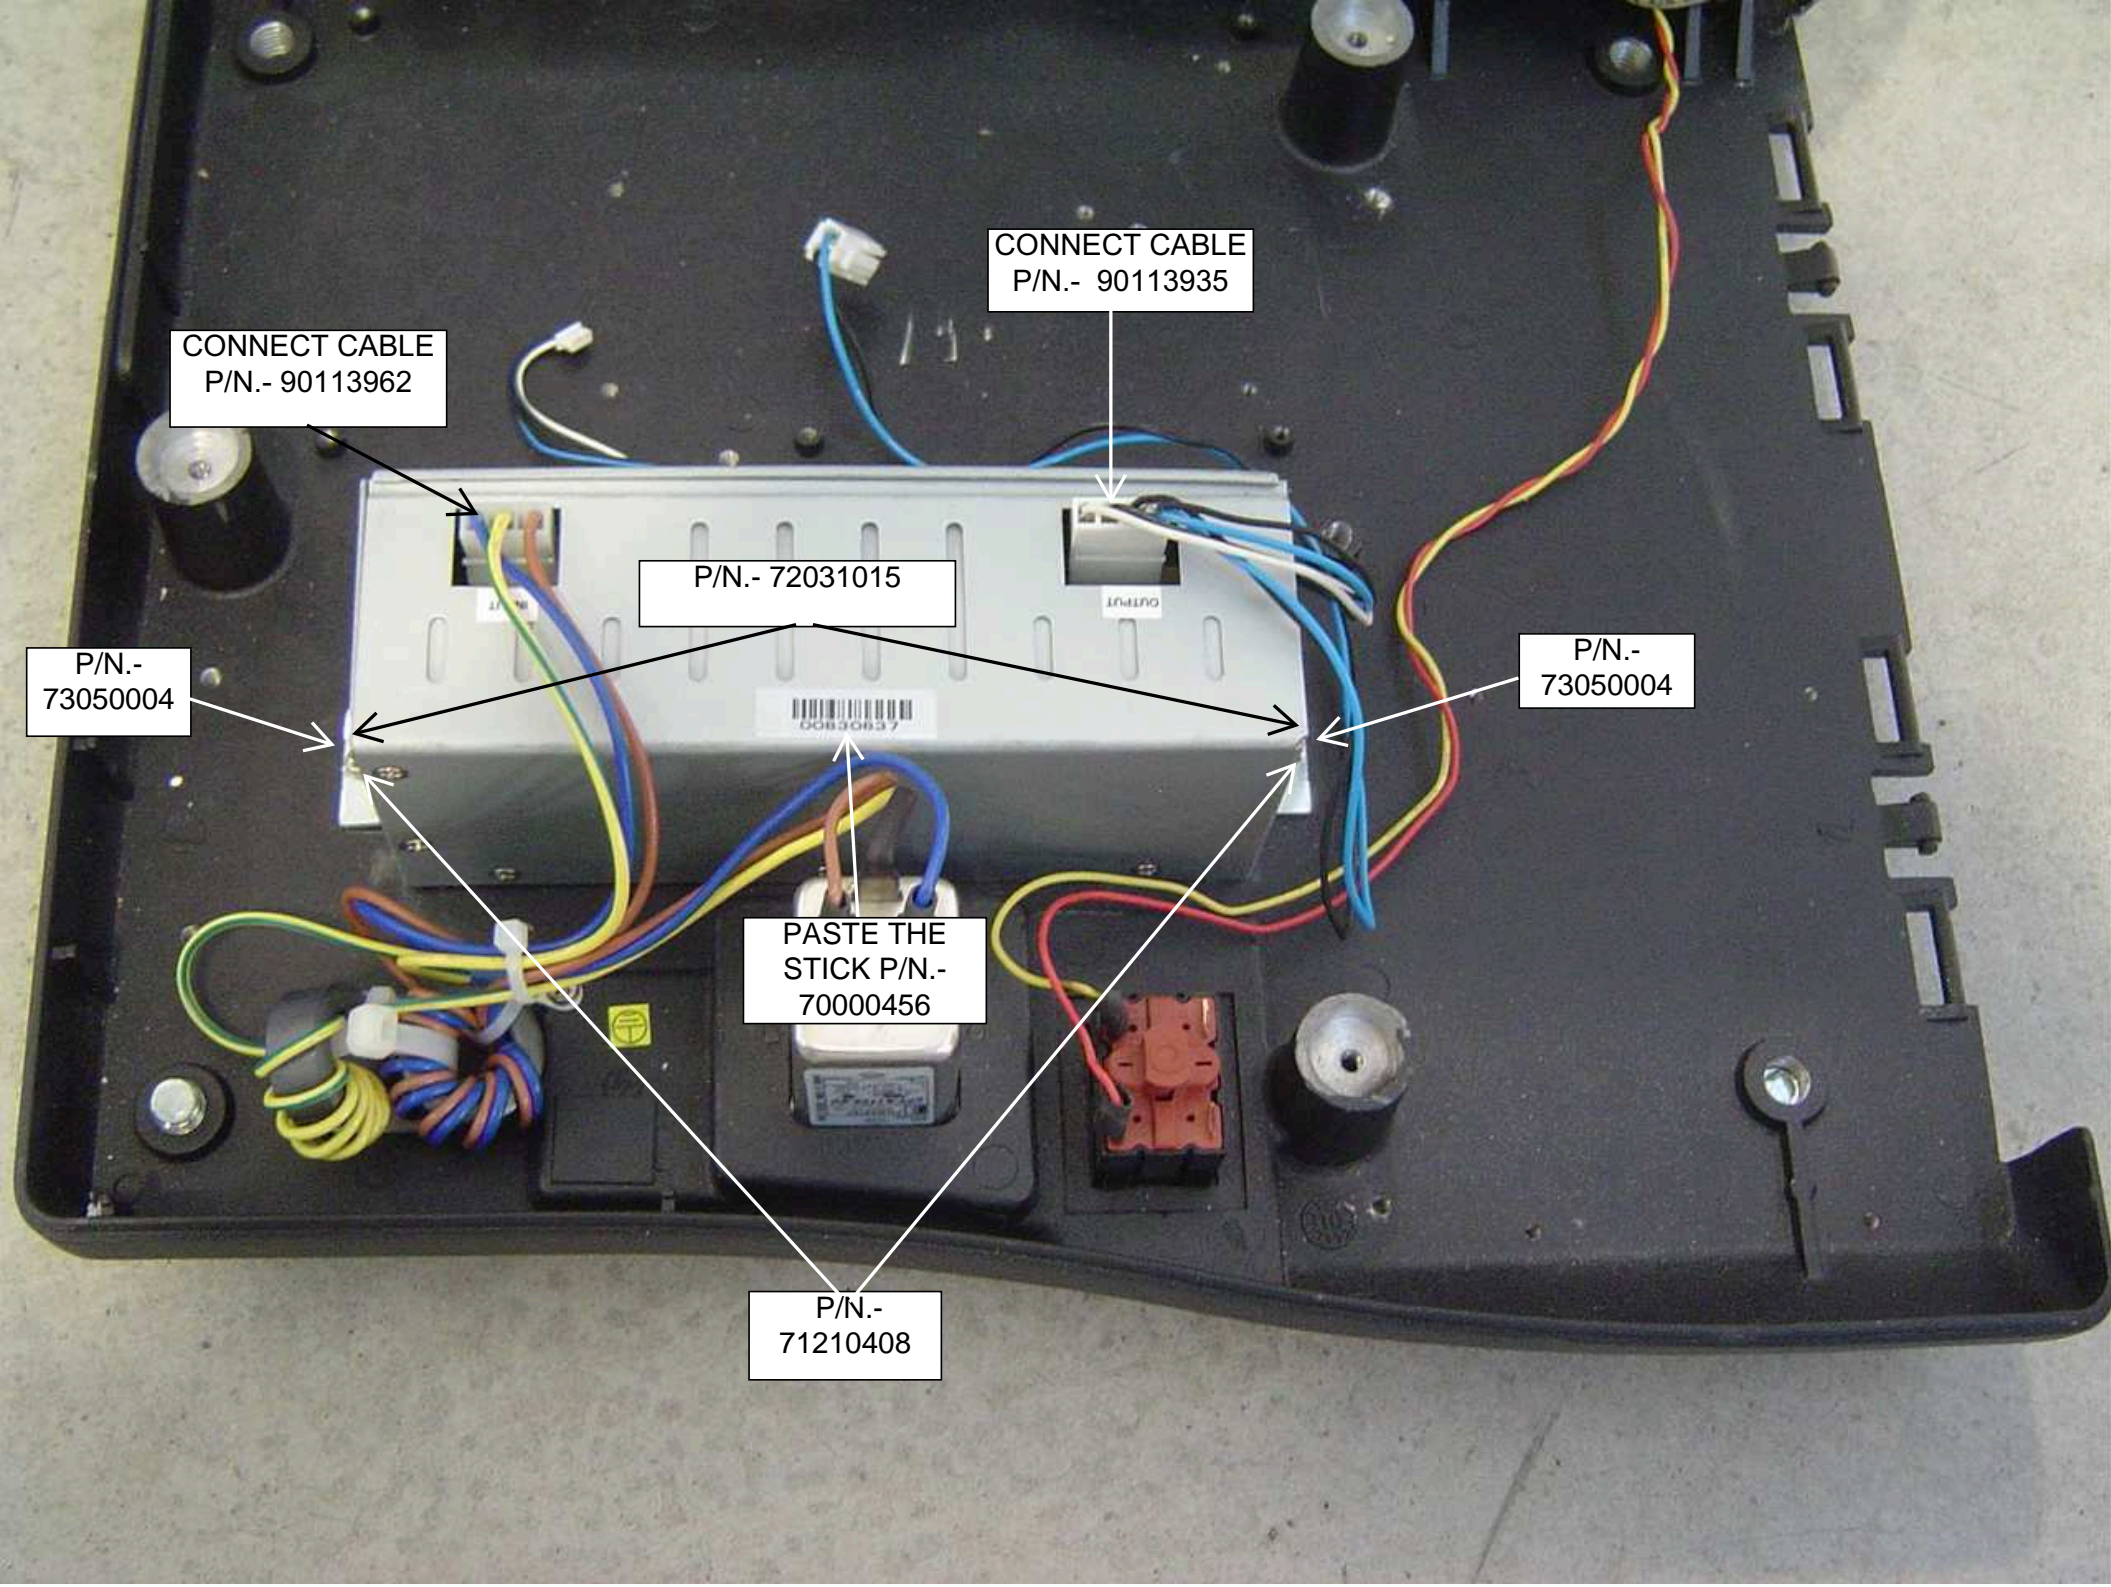



DETAIL  
ASSEMBLY  
POWER SUPPLY

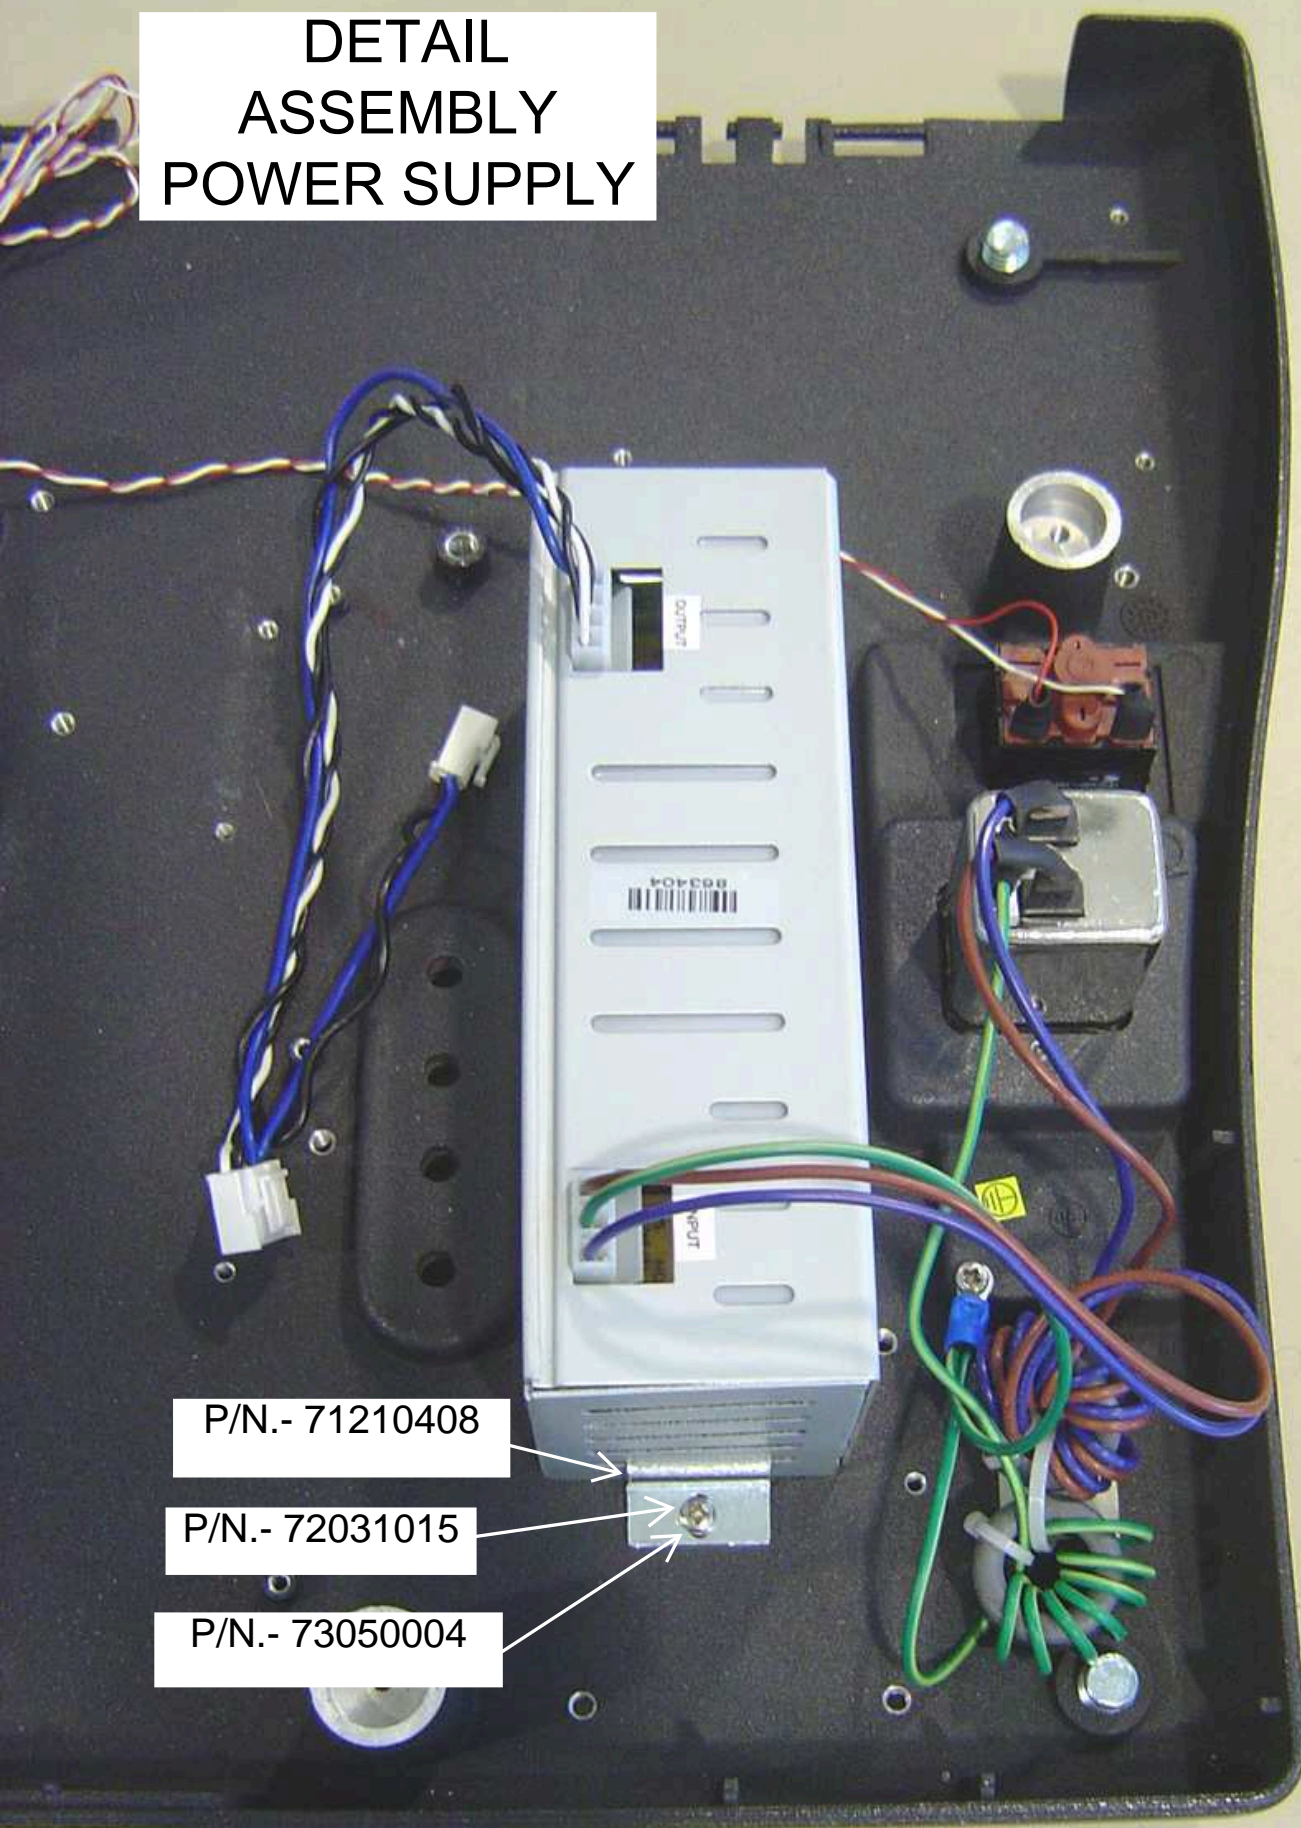

P/N.- 71210408

P/N.- 72031015


P/N.- 73050004

DETAIL  
ASSEMBLY  
POWER SUPPLY

P/N.- 71210408

P/N.- 72031015

P/N.- 73050004

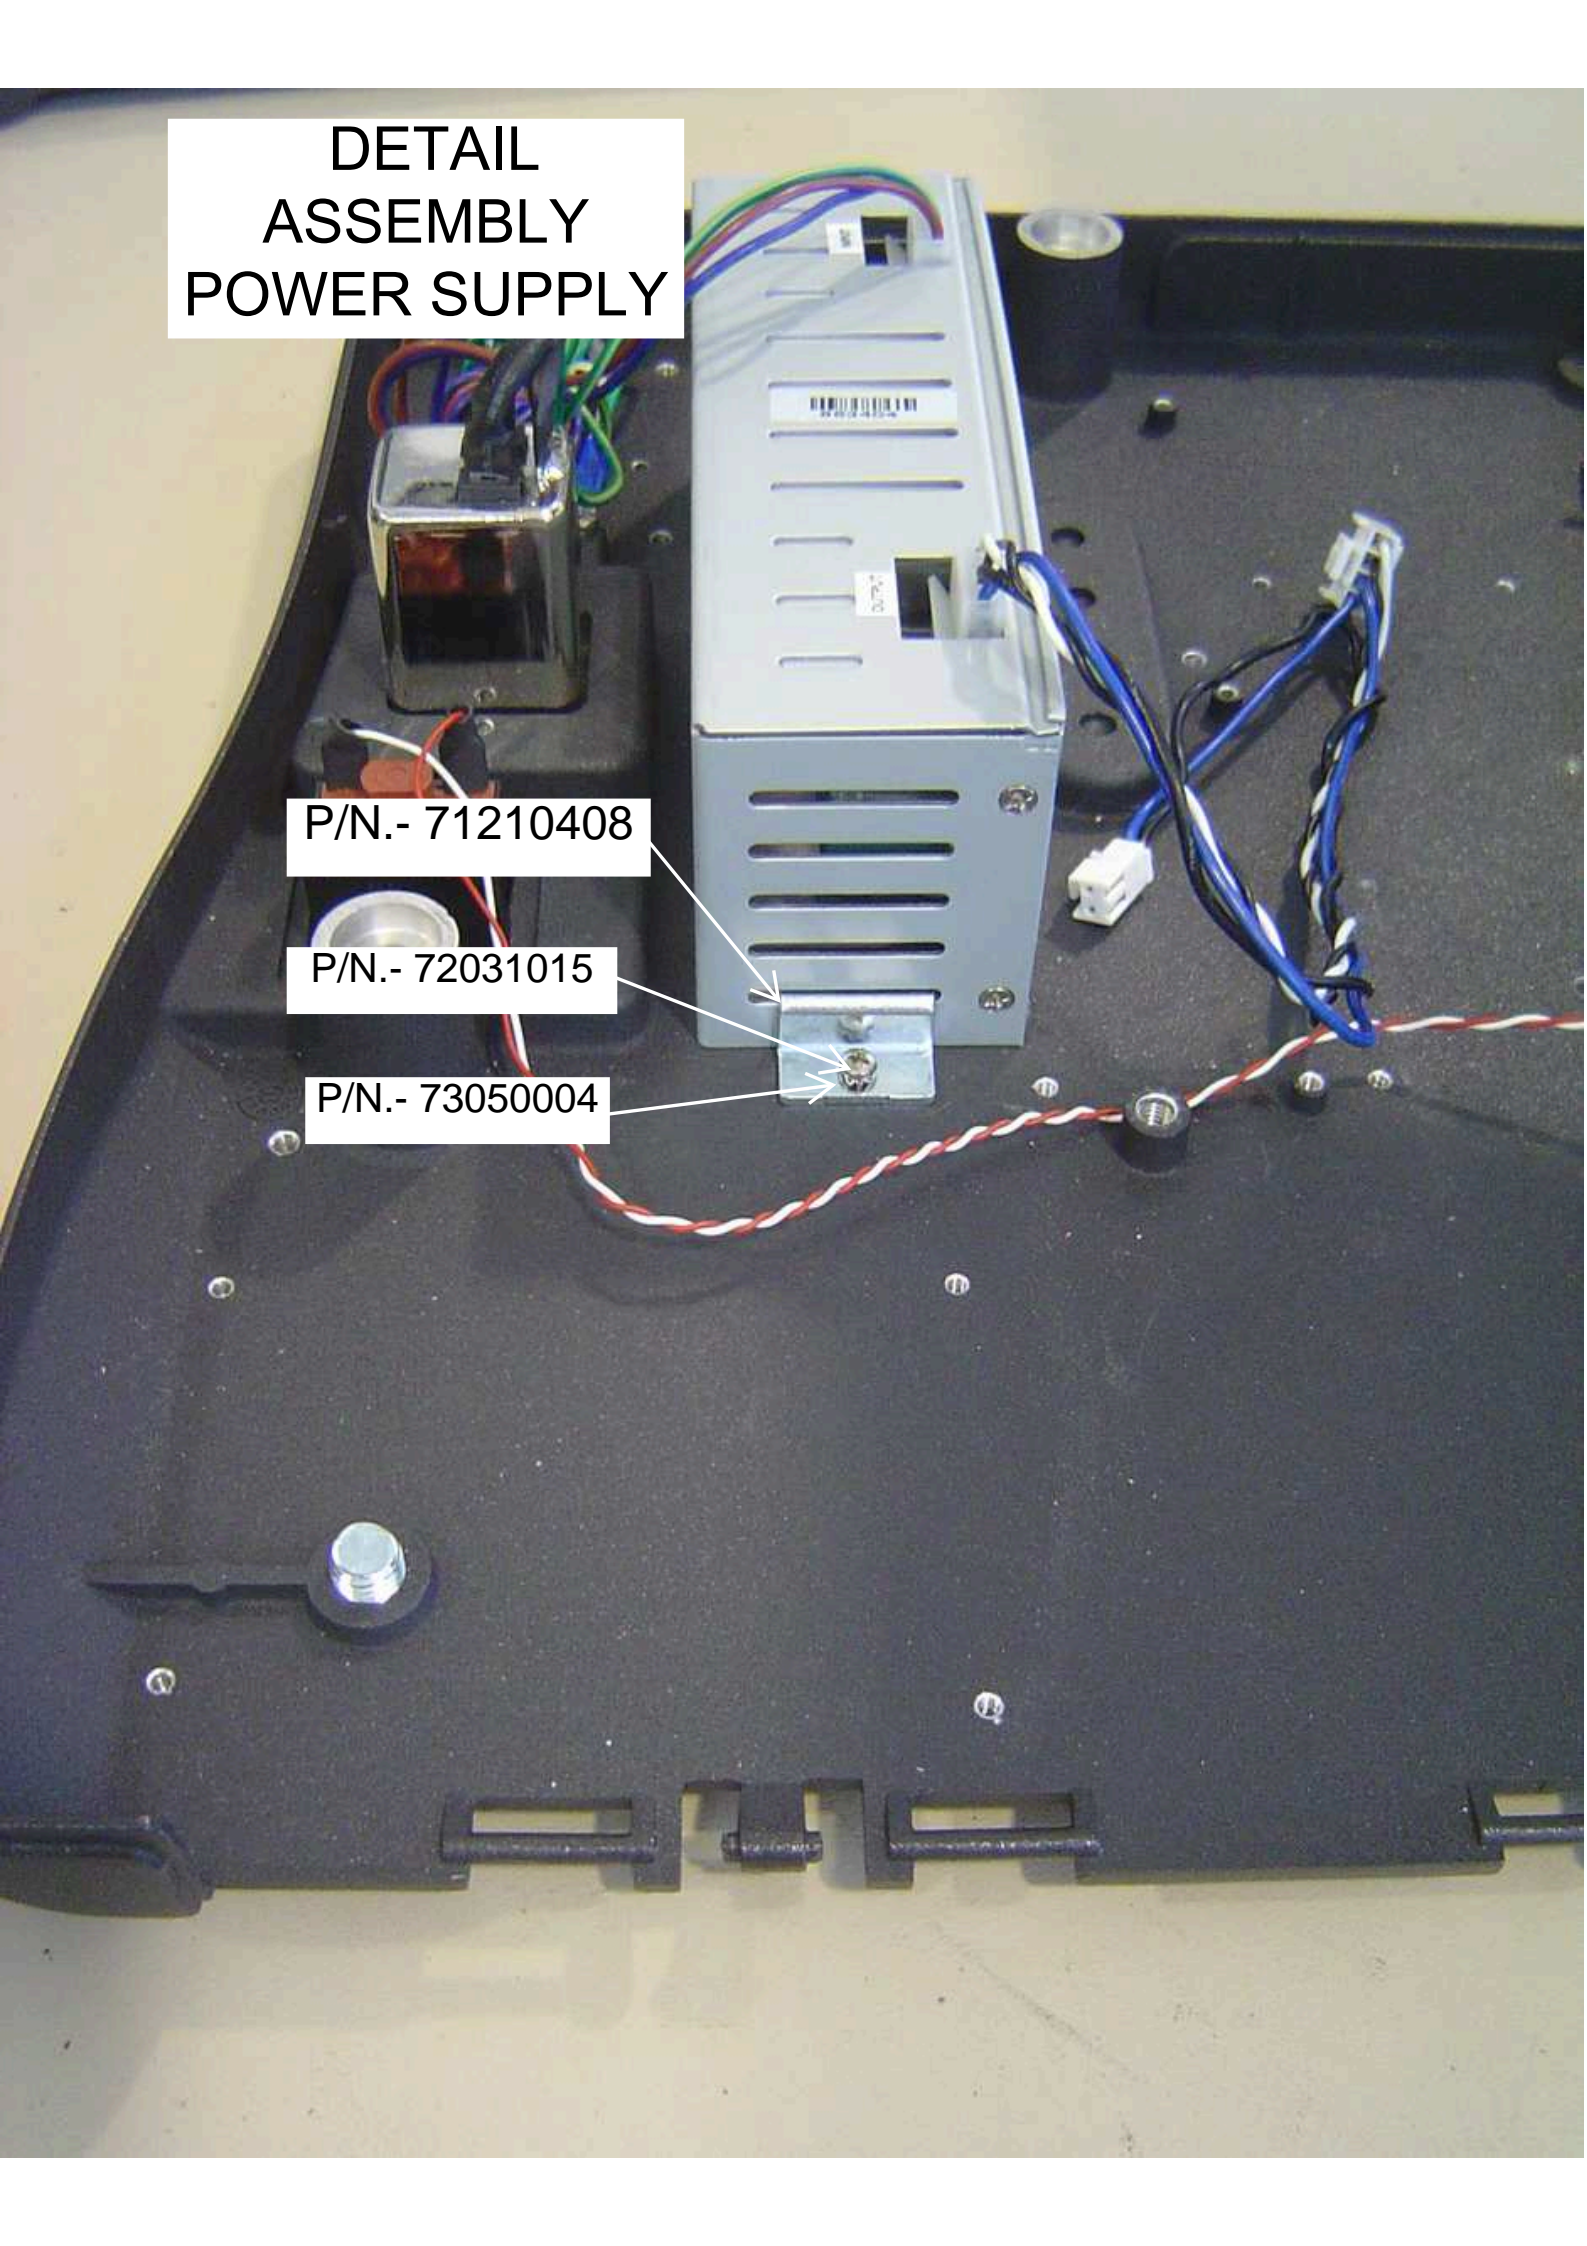

PUT THE POWER SUPPLY P/N.-  
19052165 AND HOLD WITH 2  
SPACERS P/N.- 71100003, SCREW  
P/N.- 72031016 AND SCREW P/N.-  
72091008

PASTE THE  
STICK P/N.-  
70000456

PUT HERE P/N.-  
72091008  
( NYLON  
SCREW )

CONNECT  
CABLE IN  
POWER  
SUPPLY AND  
SWITCH  
BOARD

P/N.-  
72031016

861982


P/N.-  
71100003

P/N.-  
72031026


P/N.-  
71100003

P/N.-  
72031016

PUT THE SWITCH BOARD  
P/N.- 19052167 AND HOLD  
WITH 2 SPACERS P/N.-  
71100003, SCREW P/N.-  
72031016 AND 72031026

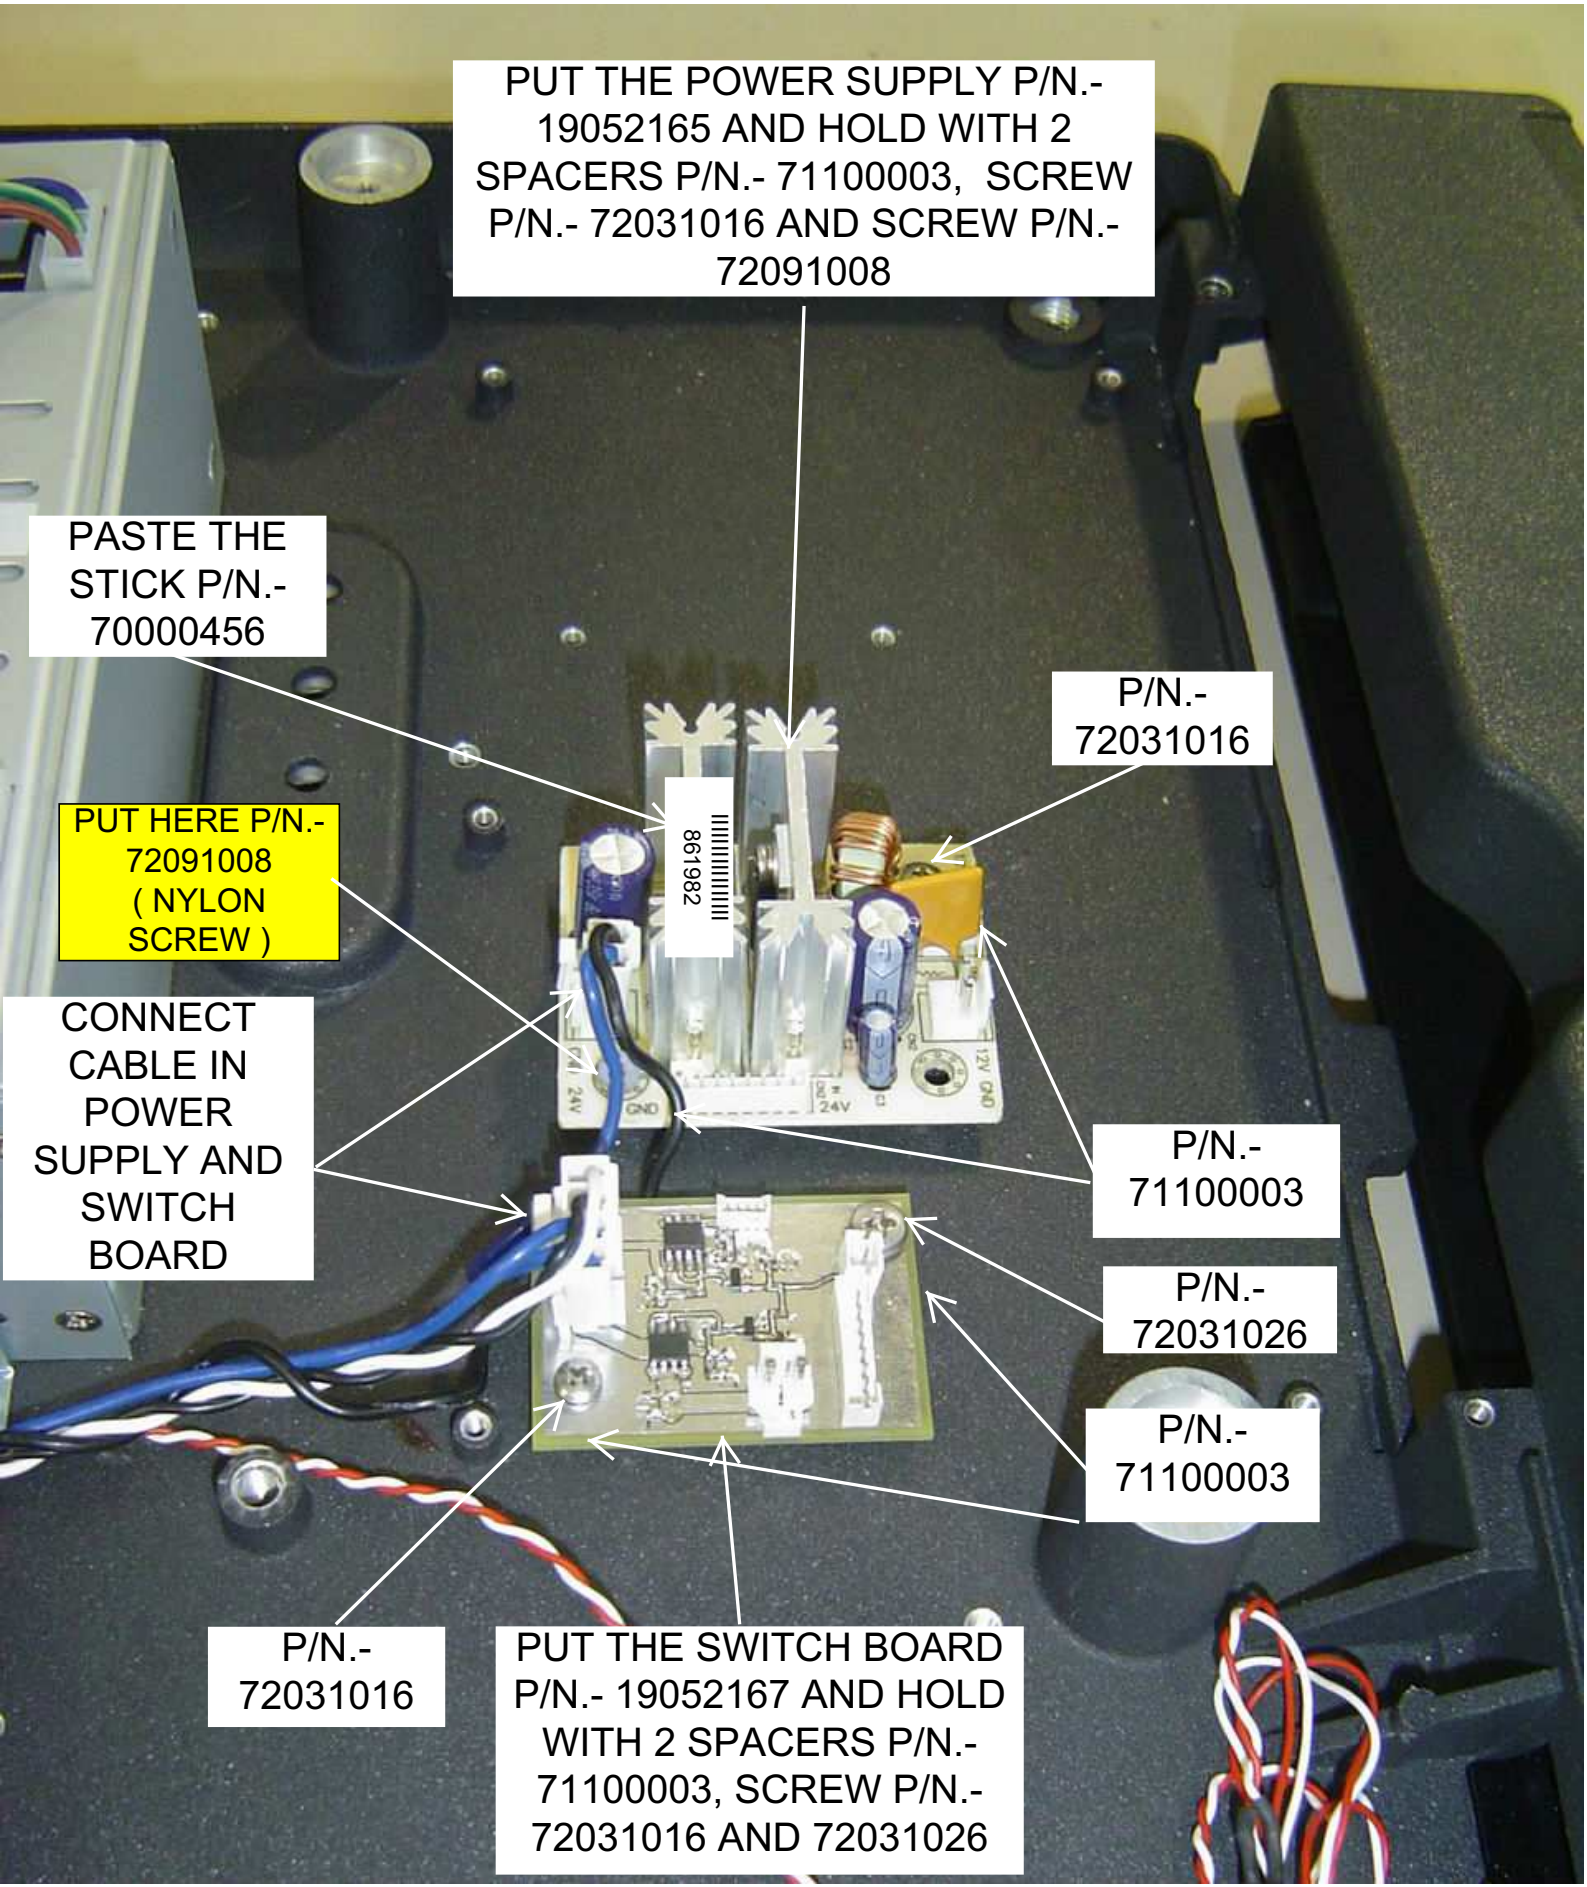


# 3.- ASSEMBLY CONNECTIONS BADGE (COMPONENTS)

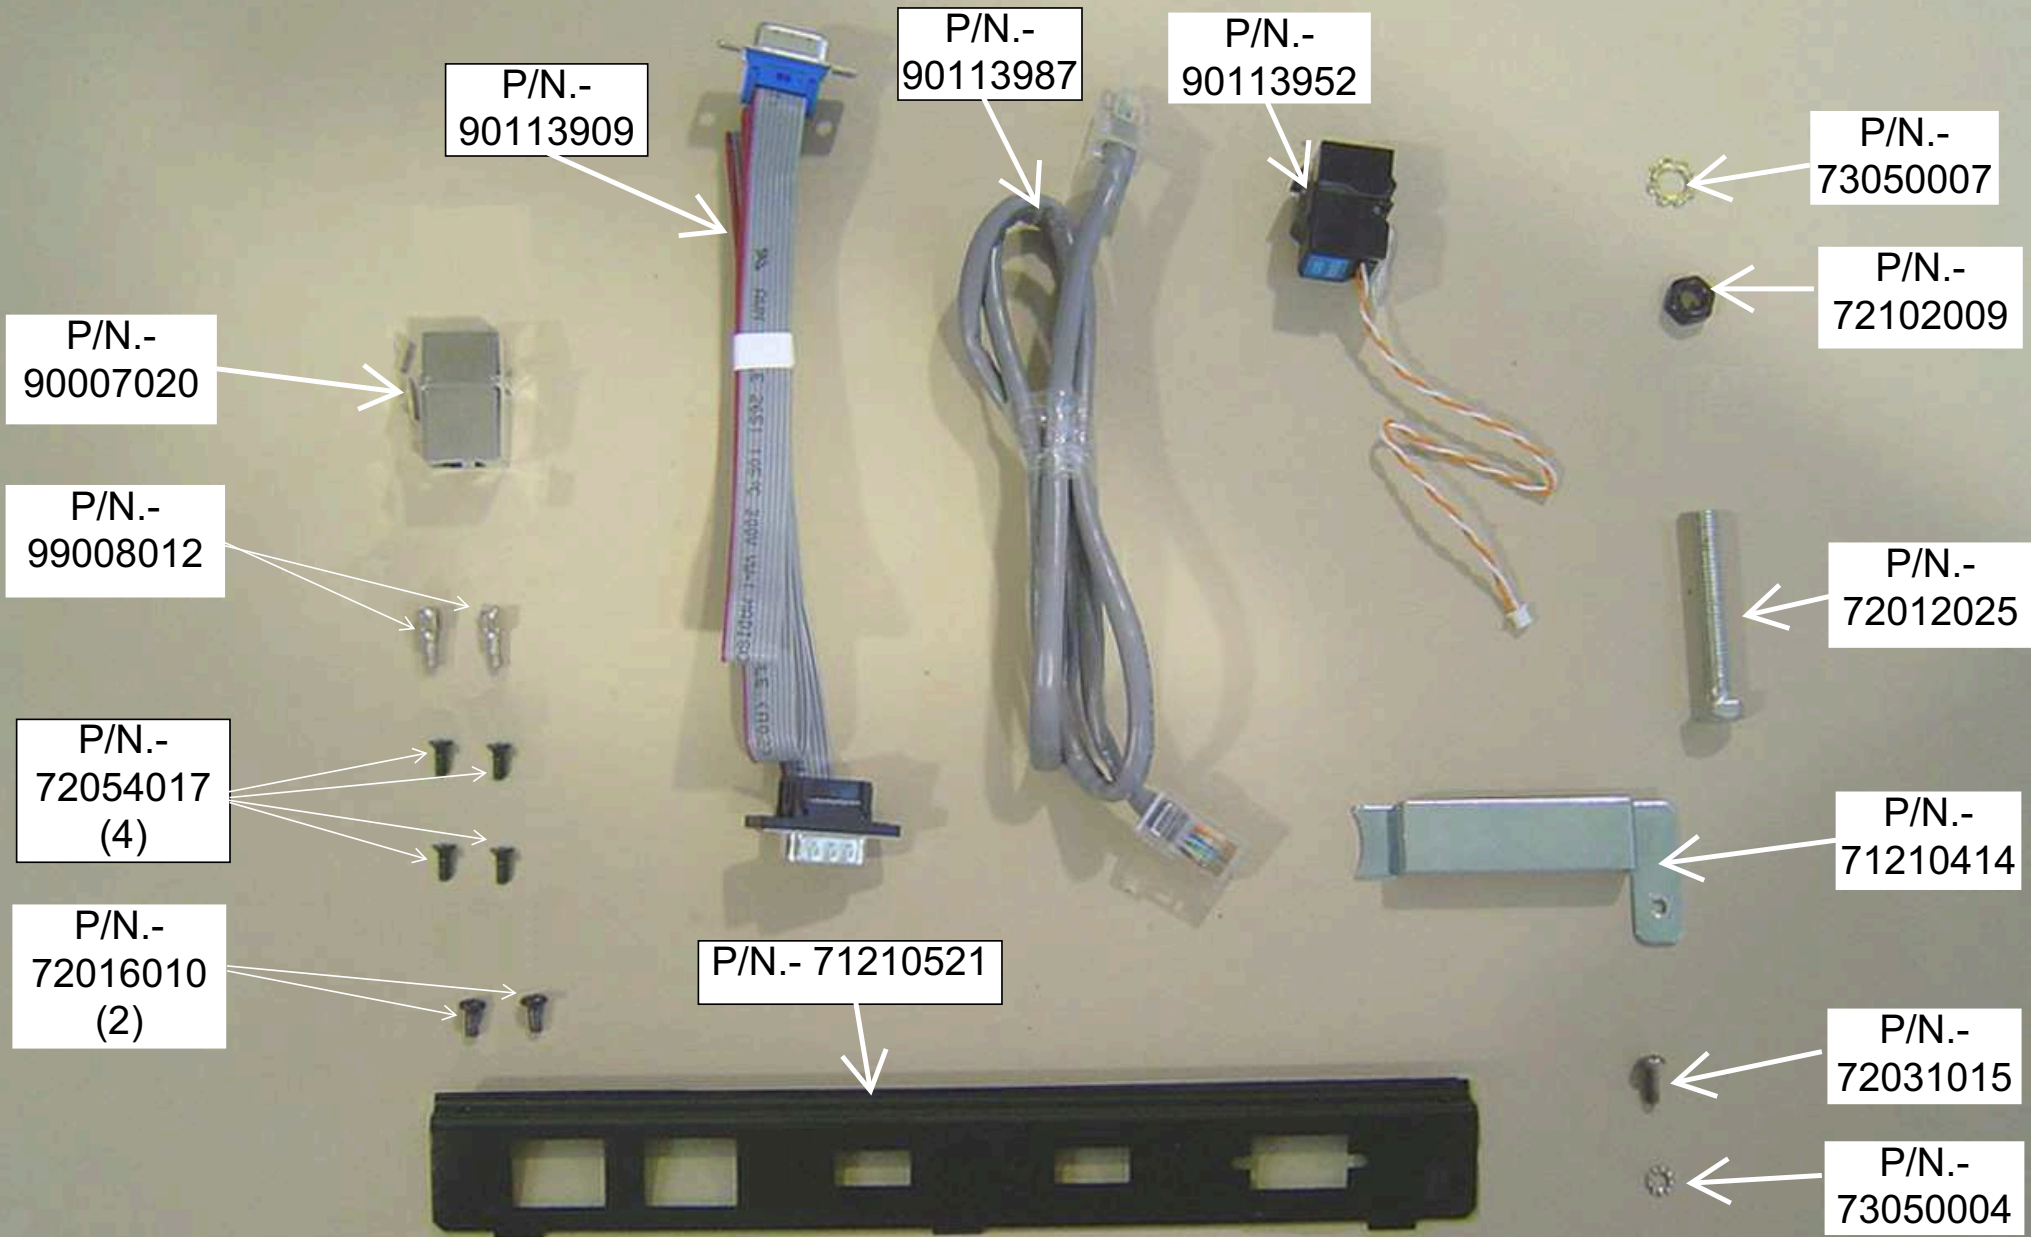

### 3.- ASSEMBLY CONNECTIONS BADGE (COMPONENTS)

P/N.-  
90114080

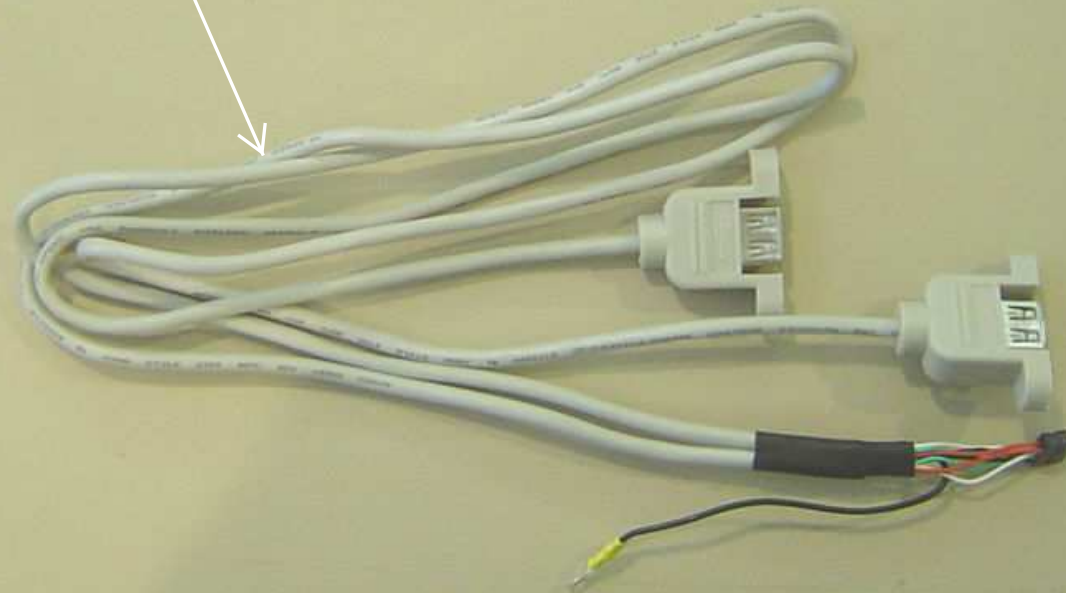

P/N.-  
71210521

HOLD CABLE P/N.-  
90113909 WITH  
RISERS P/N.-  
99008012


HOLD 2 USB CABLE  
P/N.- 90114080 WITH  
4 SCREWS P/N.-  
72054017

ASSEMBLY  
RJ45  
CONNECTOR  
P/N.- 90007020

ASSEMBLY  
CABLE RJ11 P/N.-  
90113952




# BACK SIDE CONNECTIONS BADGE

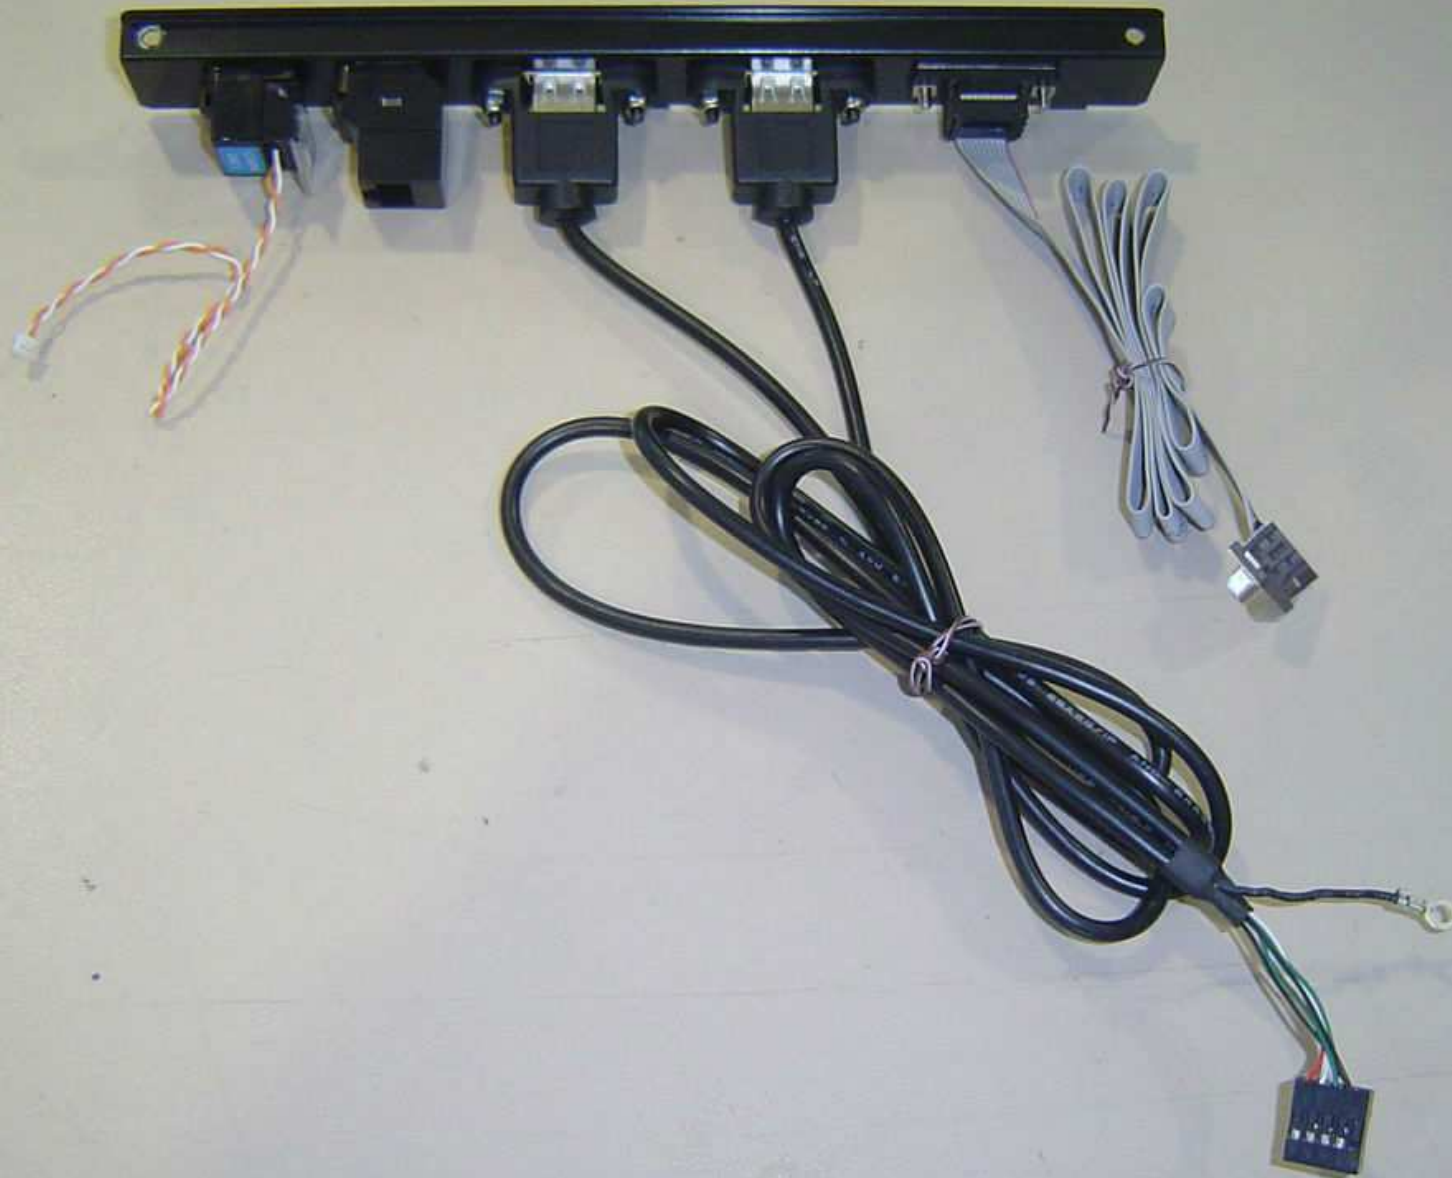

ASSEMBLY CONNECTIONS BADGE  
AND HOLD WITH 2 SCREWS P/N.-  
72016010

CONNECT  
CABLE P/N.-  
90113987 IN  
CONNECTOR

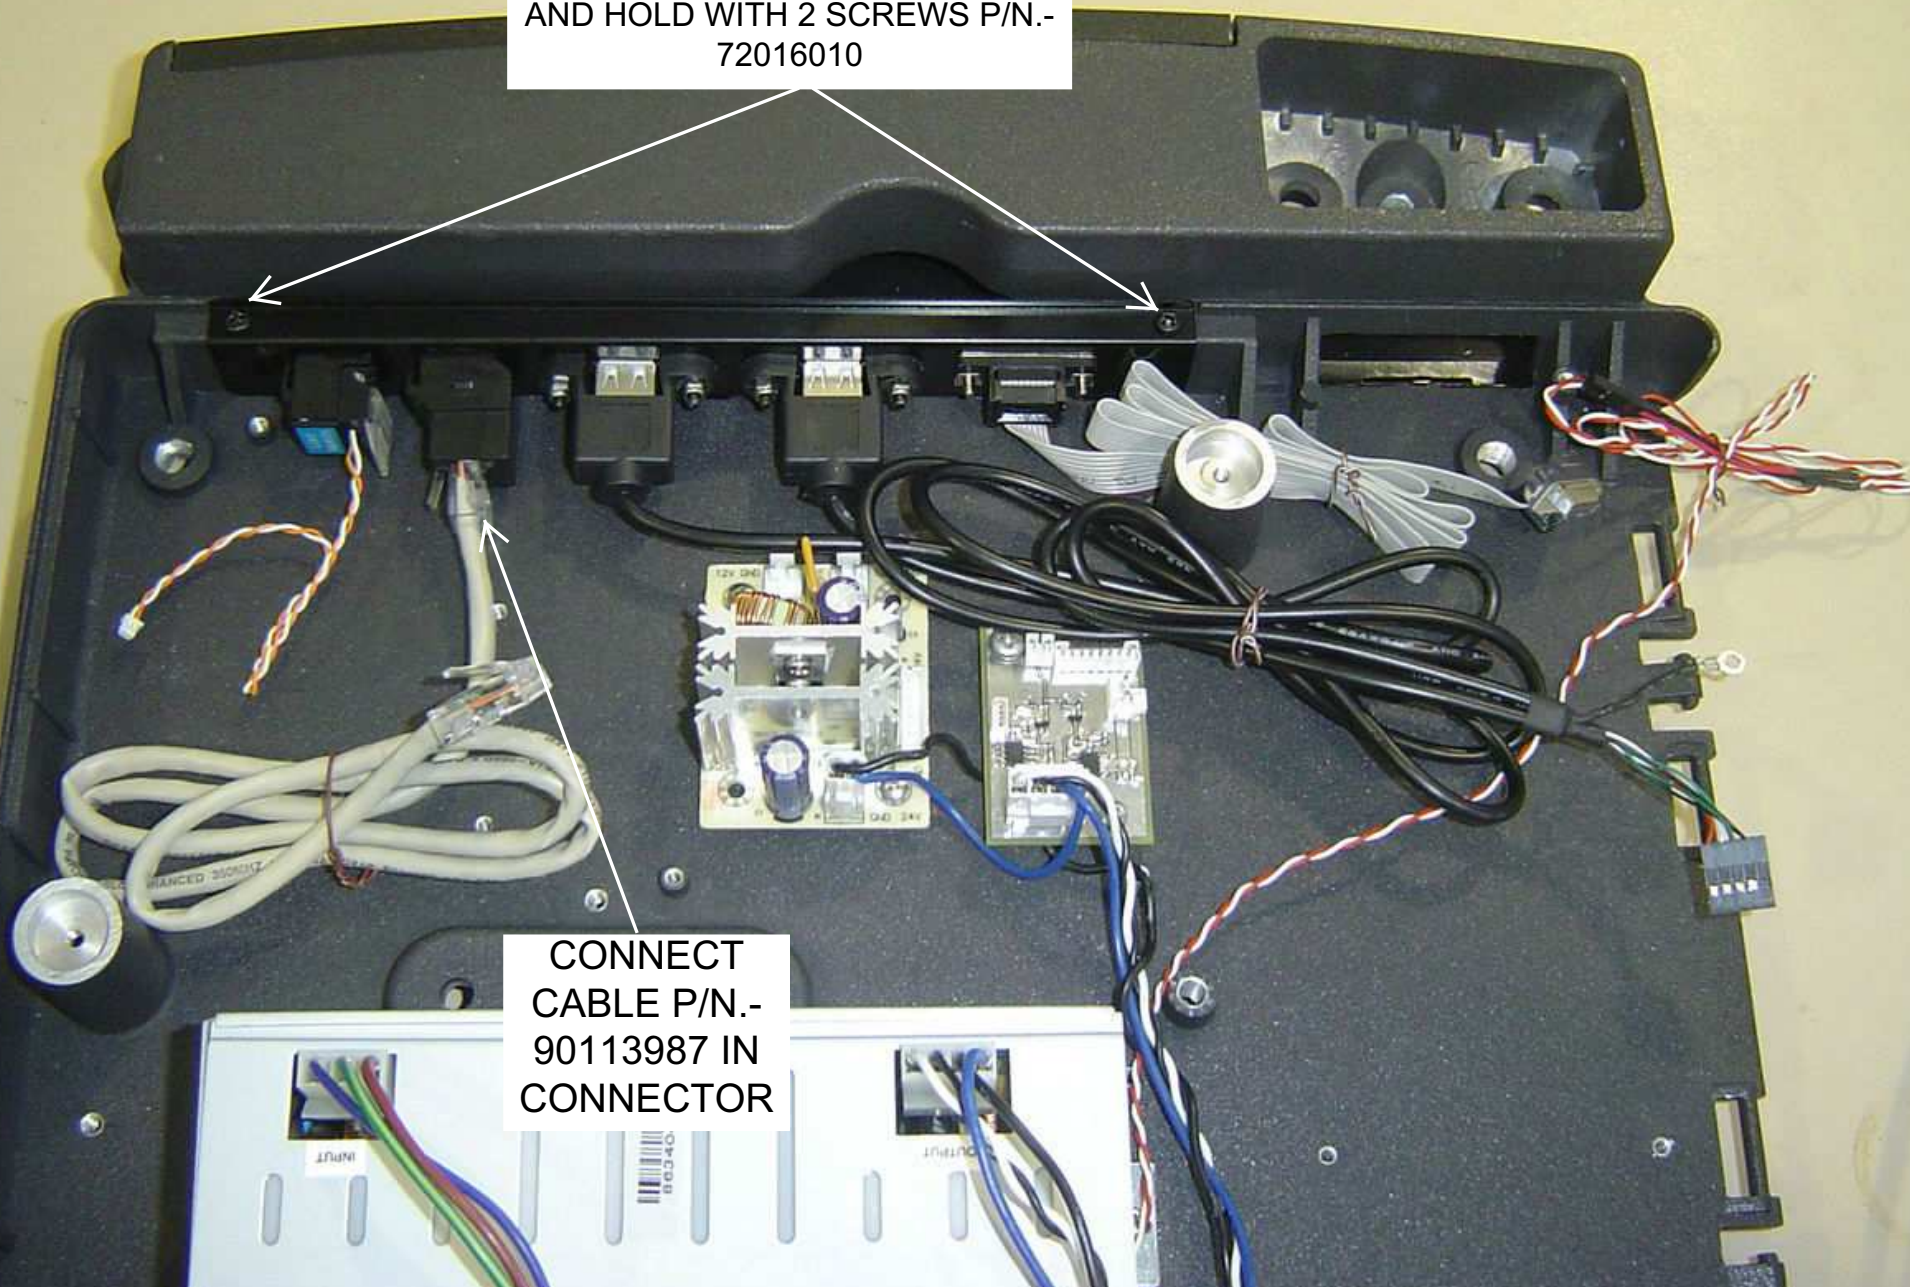



HOLD CABLES WITH  
FLANGE P/N.-  
73100002 (THIS IS  
IMPORTANT TO AVOID  
CABLES TOUCH LOAD  
CELL)

RUNNING THE WIRES  
UNDER THE GUIDE LIKE  
SHOW IN PICTURE


ASSEMBLY CABLE  
GUIDE P/N.- 71210414  
WITH SCREW P/N.-  
19031015 AND  
WASHER P/N.- 7305000

THREAD THE  
SCREW P/N.-  
72012025 WITH  
WASHER P/N.-  
73050007 AND NUT  
P/N.- 72102009



#### 4.- ASSEMBLY SET LOAD CELL P/N.- 97003239 (COMPONENTS)

P/N.- 97003224  
(FOR 15 Kg )

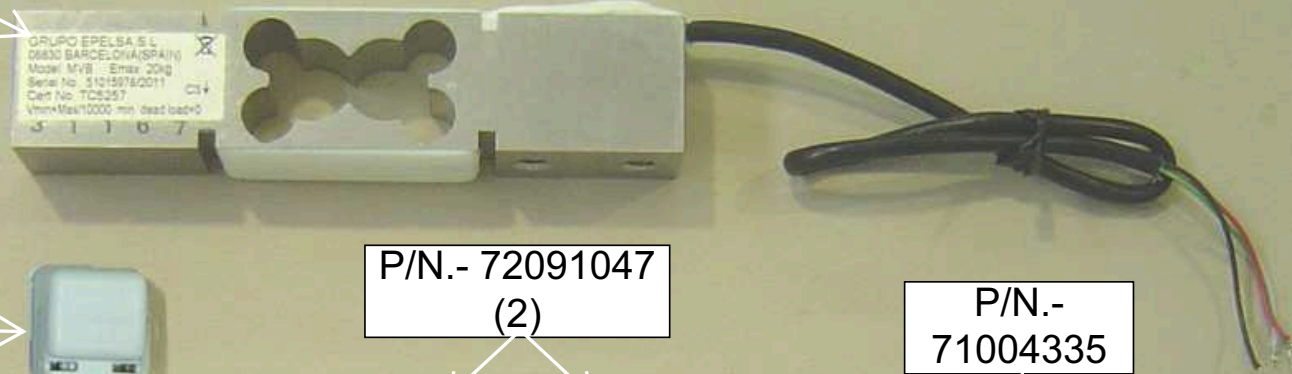

P/N.-  
93002035



P/N.- 72091047  
(2)



P/N.-  
71004335



P/N.-  
71101024



P/N.-  
71101022



P/N.- 73003001  
(2)




# 4.- ASSEMBLY SET LOAD CELL P/N.- 97003239 (COMPONENTS)


P/N.-  
19016800



P/N.-  
71210520

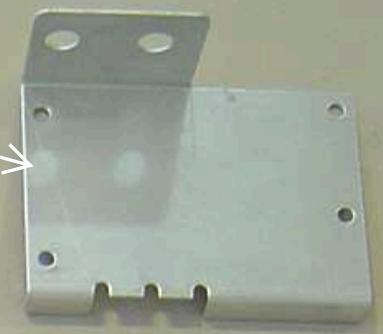


P/N.-  
19016900

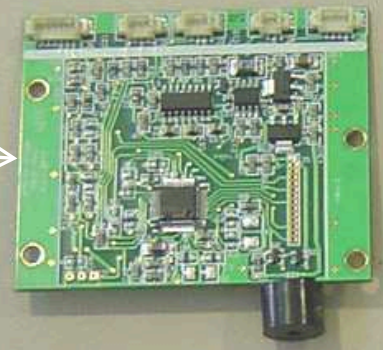


P/N.-  
71002295



P/N.-  
71100003 (4)



RIVET P/N.- 72300013 (3x 16)  
(4)

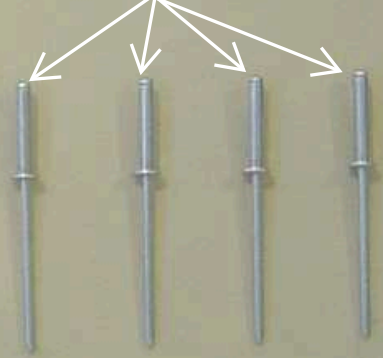




CUT THE WIRES  
OF THE LOAD  
CELL TO A  
LENGTH OF 2 cm



SOLDER DE CABLE P/N.-  
112583 TO LOAD CELL  
GROUND CABLE PUTTING  
SHRINK P/N.-  
79900061

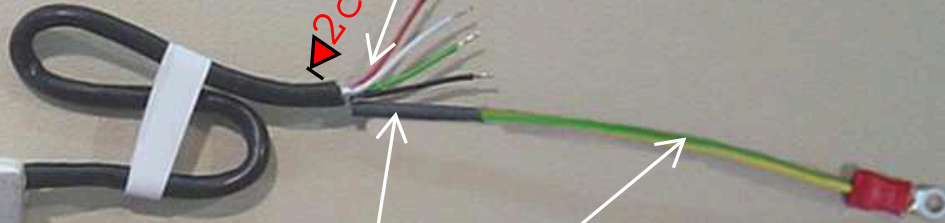


SOLDER THE LOAD  
CELL CABLES IN BOARD  
P/N.- 19016800

RED

BLACK

GREEN

WHITE

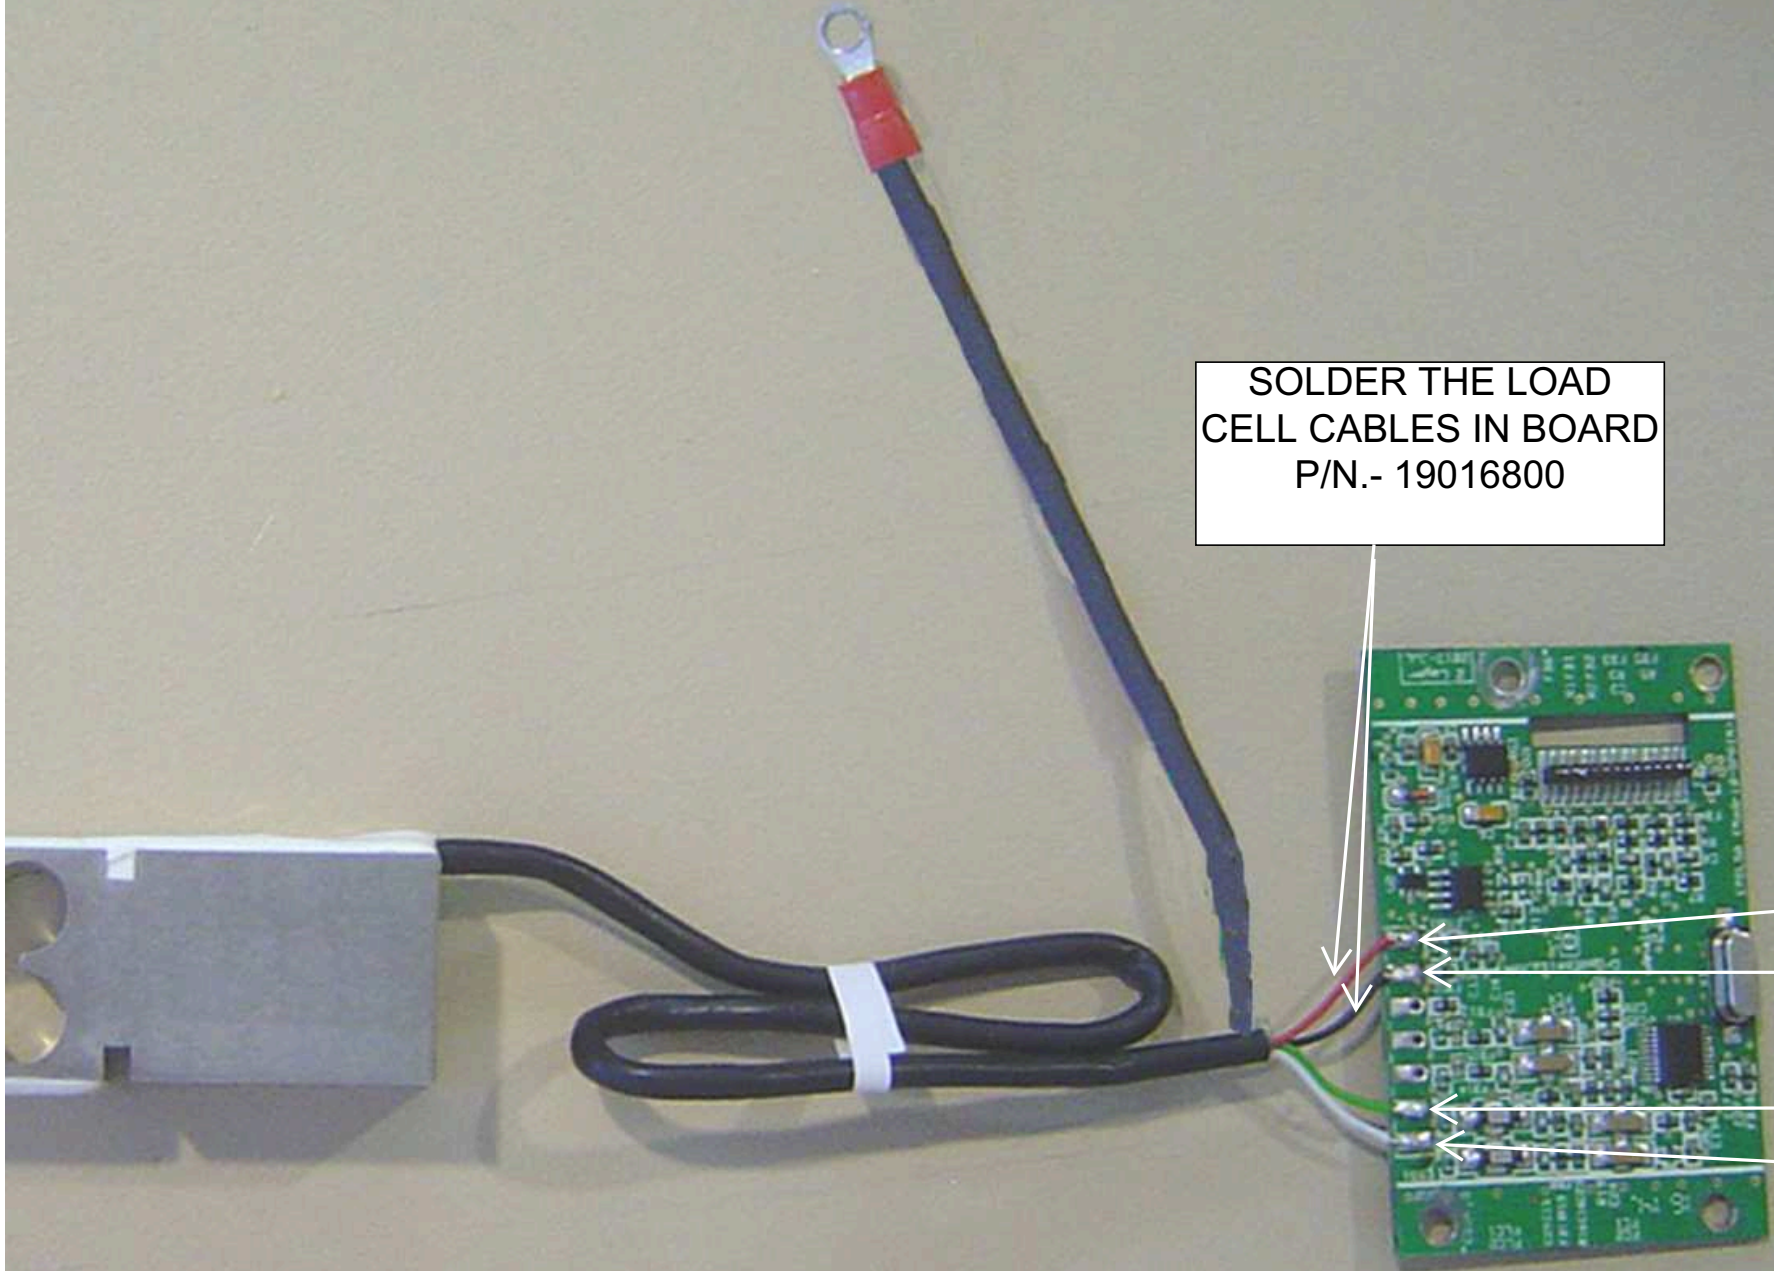


PUT SPACER P/N.- 71100003 AND GUIDE-SCREW TO ASSEMBLY ANALOG BOARD AND BPTC BOARD (P/N.- 19016900). AFTER ASSEMBLY SOLDER PINS IN J5

GUIDE SCREWS

SPACERS

SOLDER 14 PINS AT J5

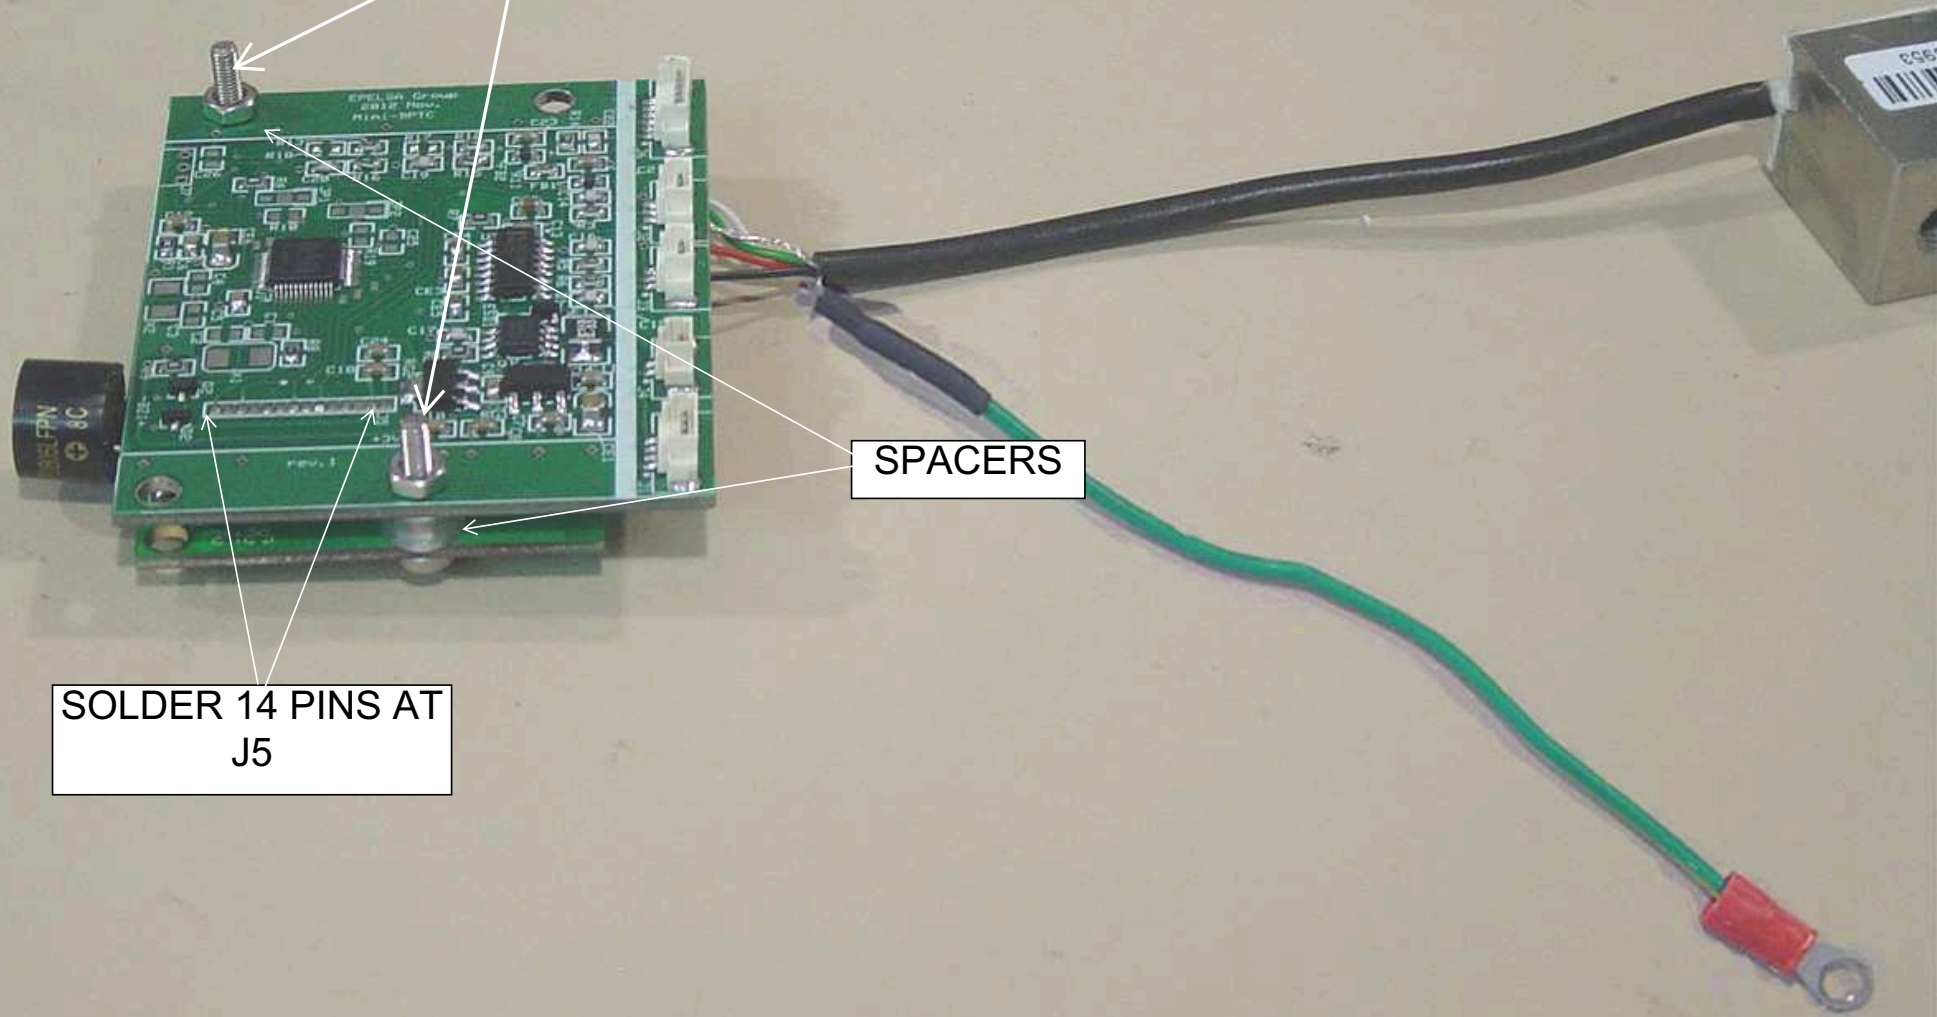

ASSEMBLY SET DIGITAL LOAD CELL

HOLD ALL  
TOGETHER WITH 4  
RIVETS

RIVET P/N.-  
72300013

P/N.- 71002295


P/N.- 19016900

P/N.- 71100003


P/N.- 19016800

P/N.- 71004335

P/N.- 71210520

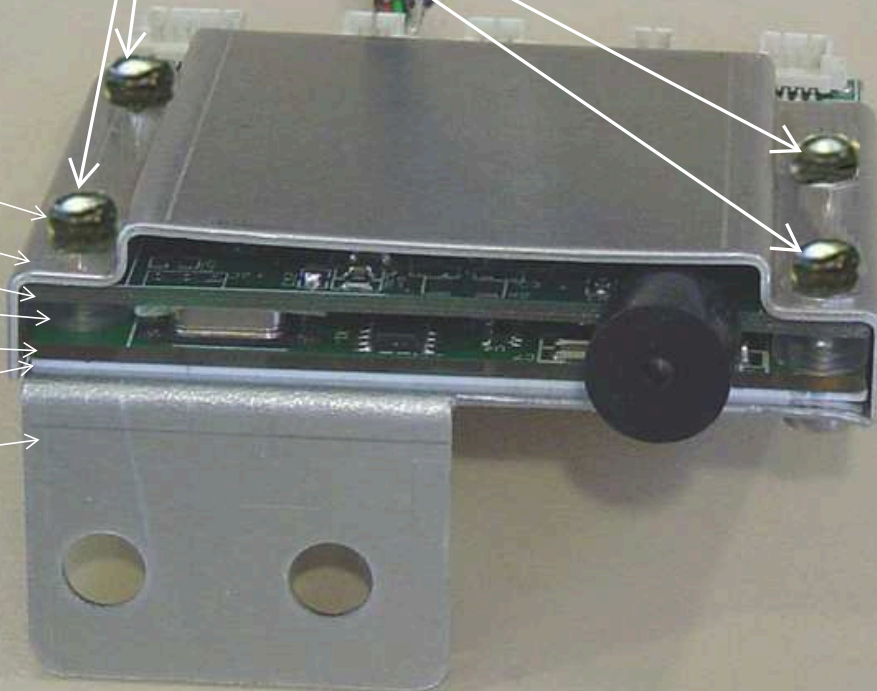

JOIN THE SET  
WITH 4 RIVETS

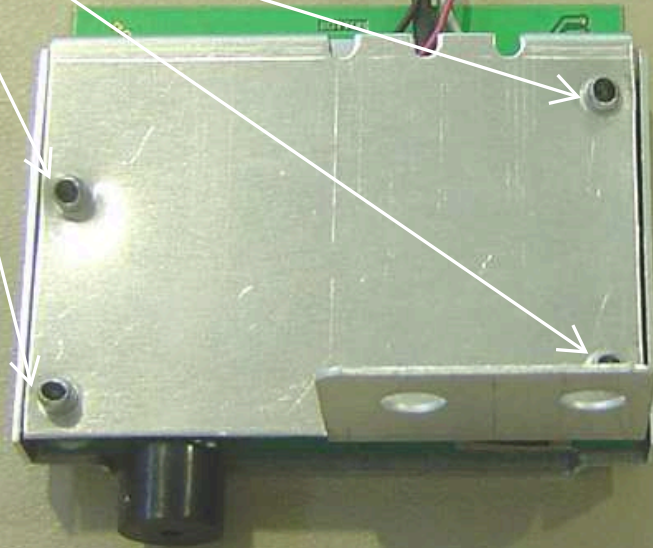




LOAD CELL

P/N.- 71101024

SET DIGITAL  
LOAD CELL


P/N.- 71101022

PASTE THE  
STICK P/N.-  
70000456

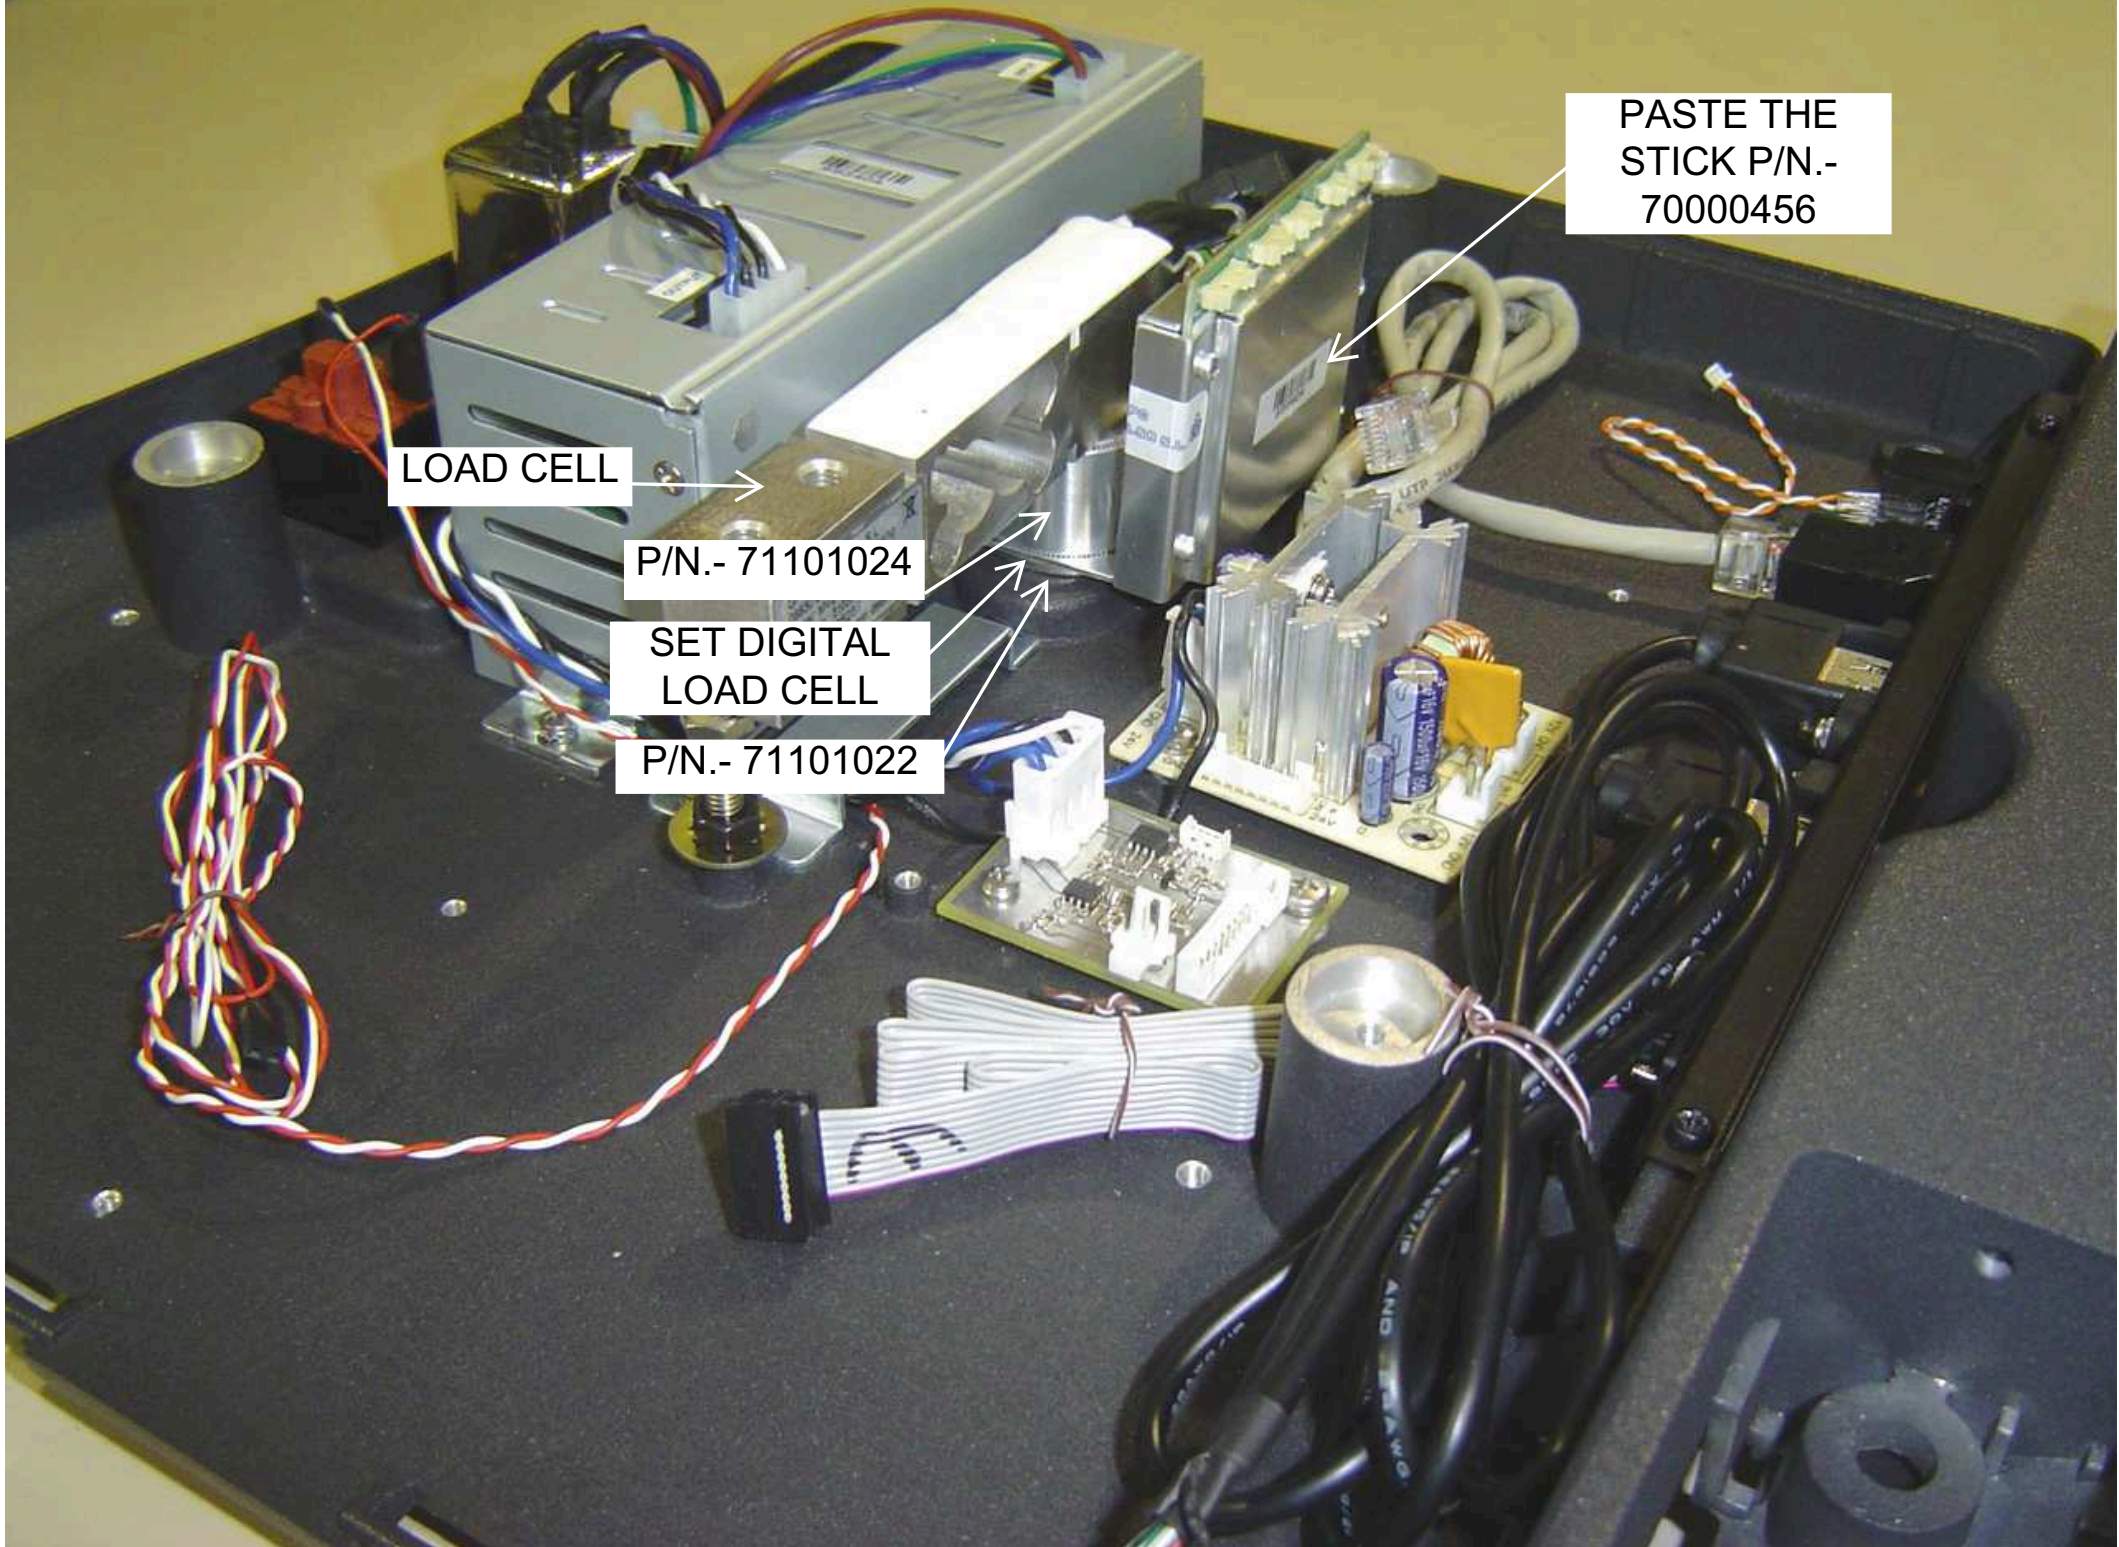


SCREWS P/N.-  
72091042  
TIGHTEN WITH A  
REGULATED  
TOOL TO A  
TIGHTENING  
TORQUE 11 Nm

P/N.- 73003001

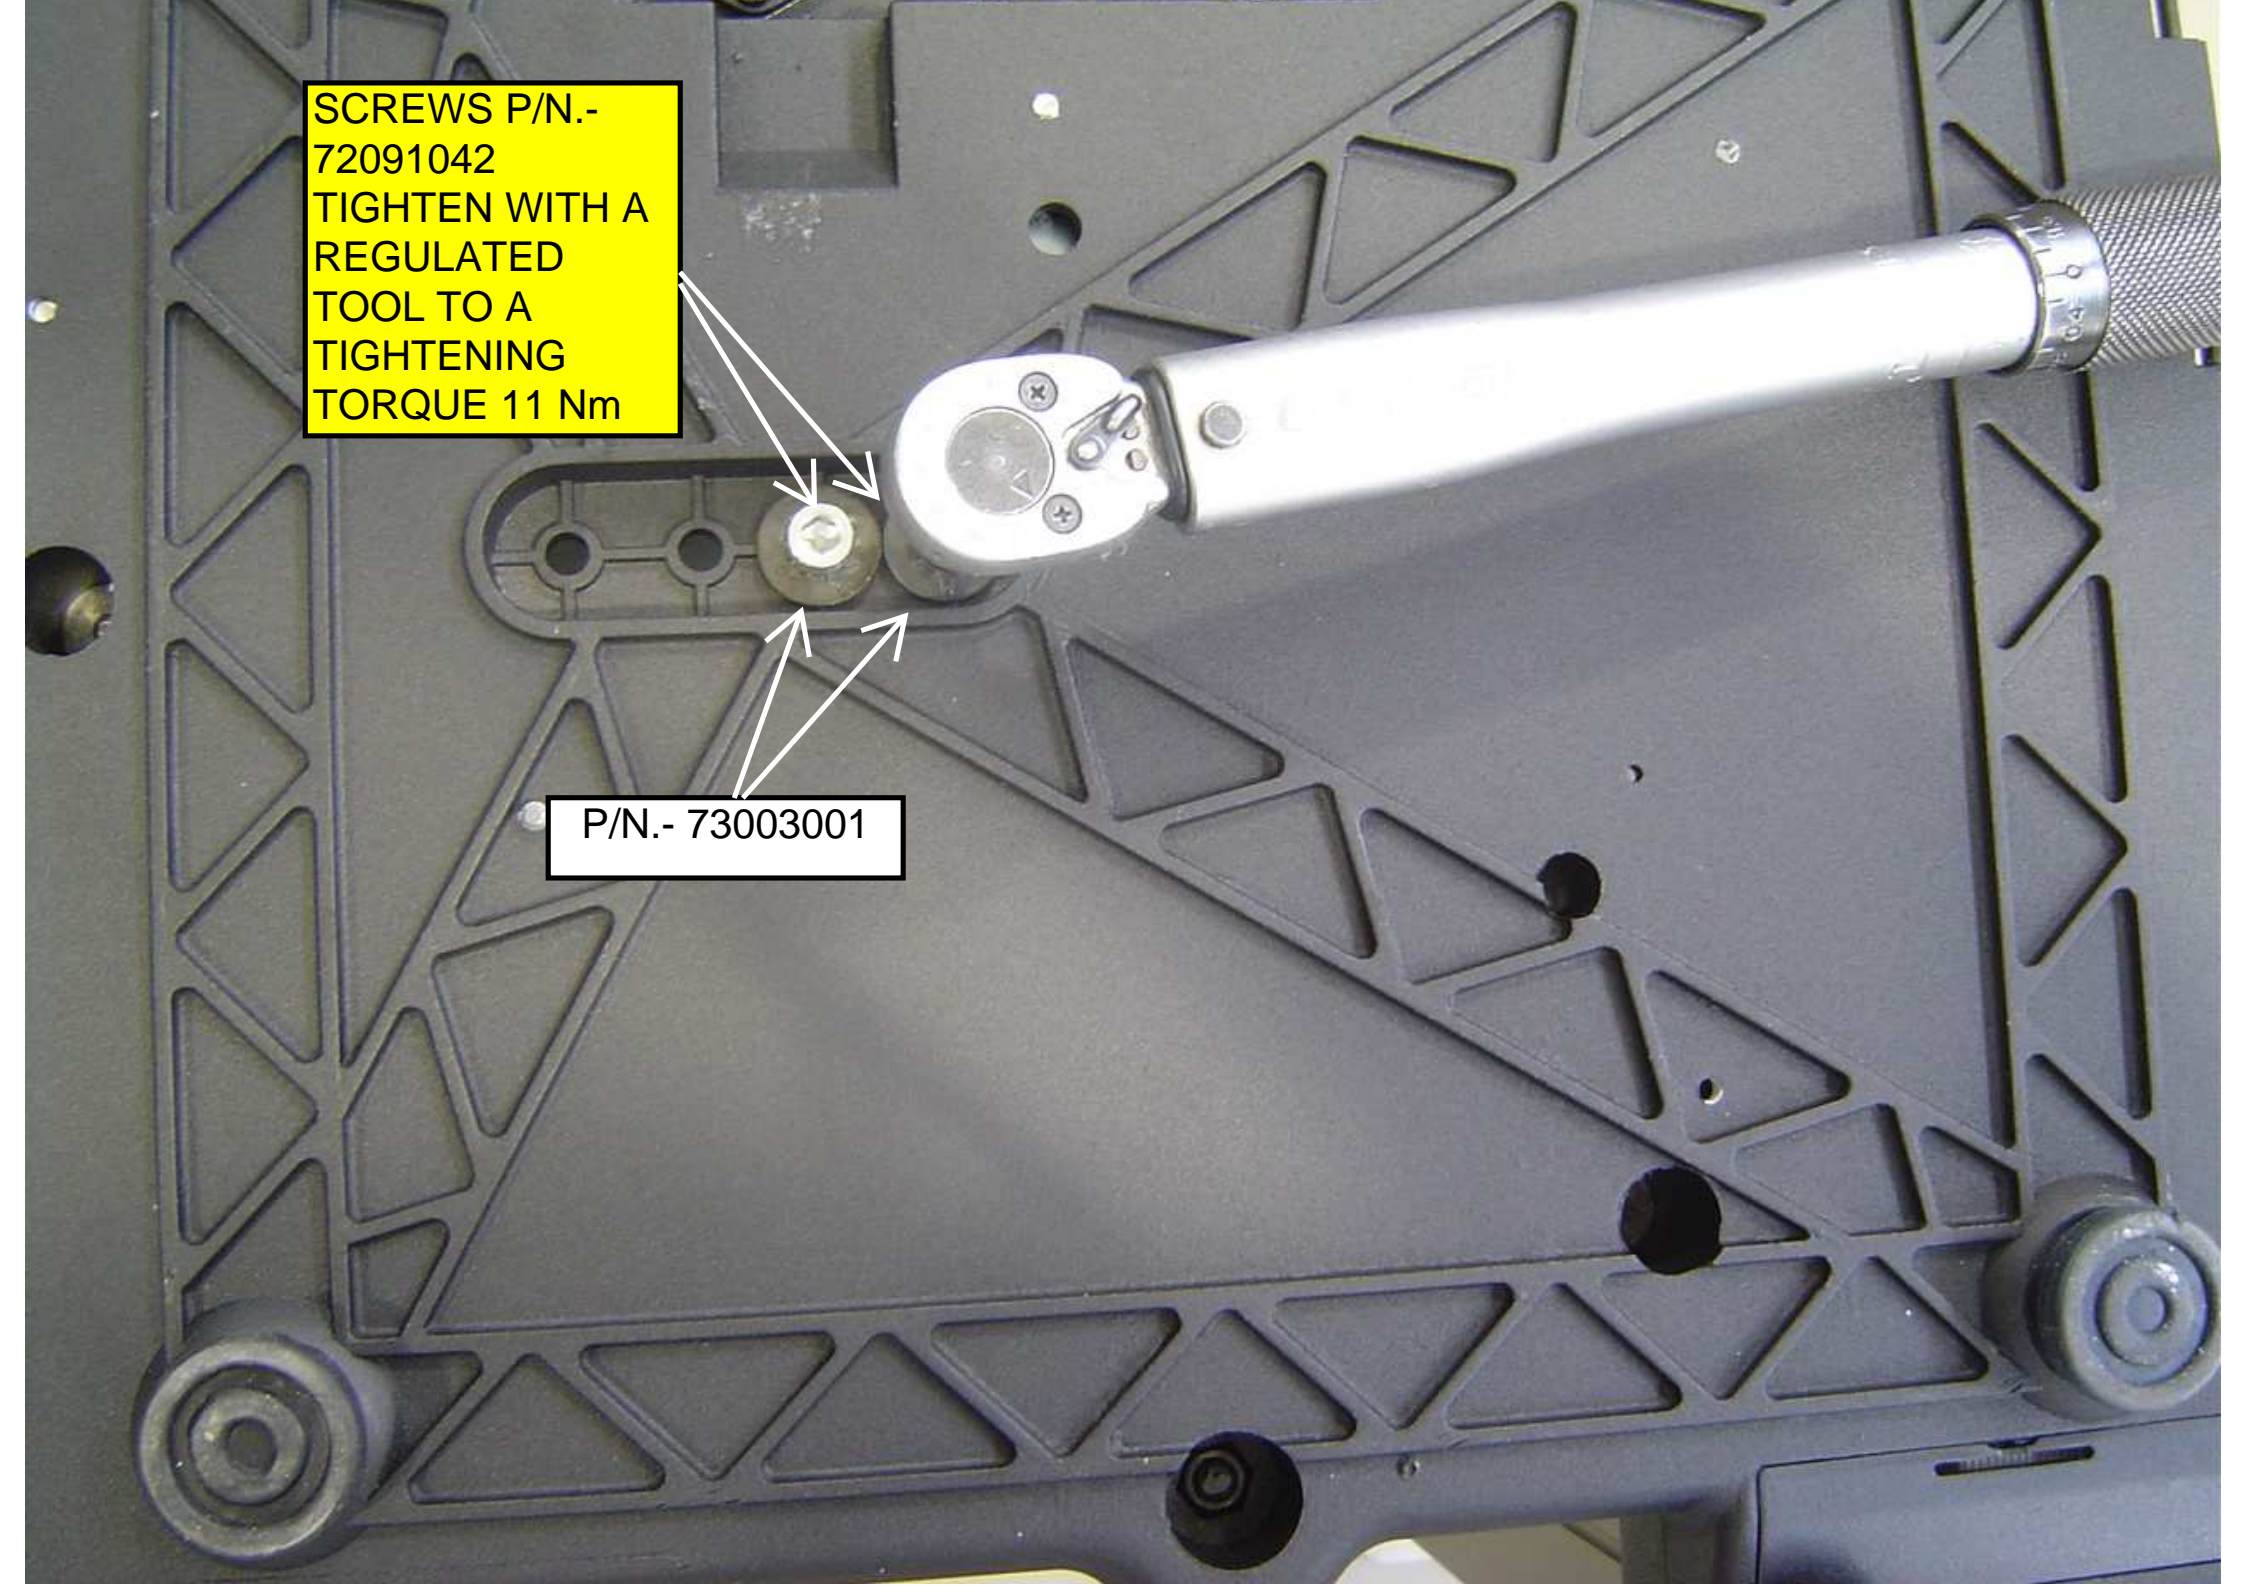


ASSEMBLY THE FERRITE P/  
N.- 93002035 IN LOAD CELL  
CABLE AND HOLD WITH A  
FLANGE P/N.- 73100002


CABLE P/N.-  
112583

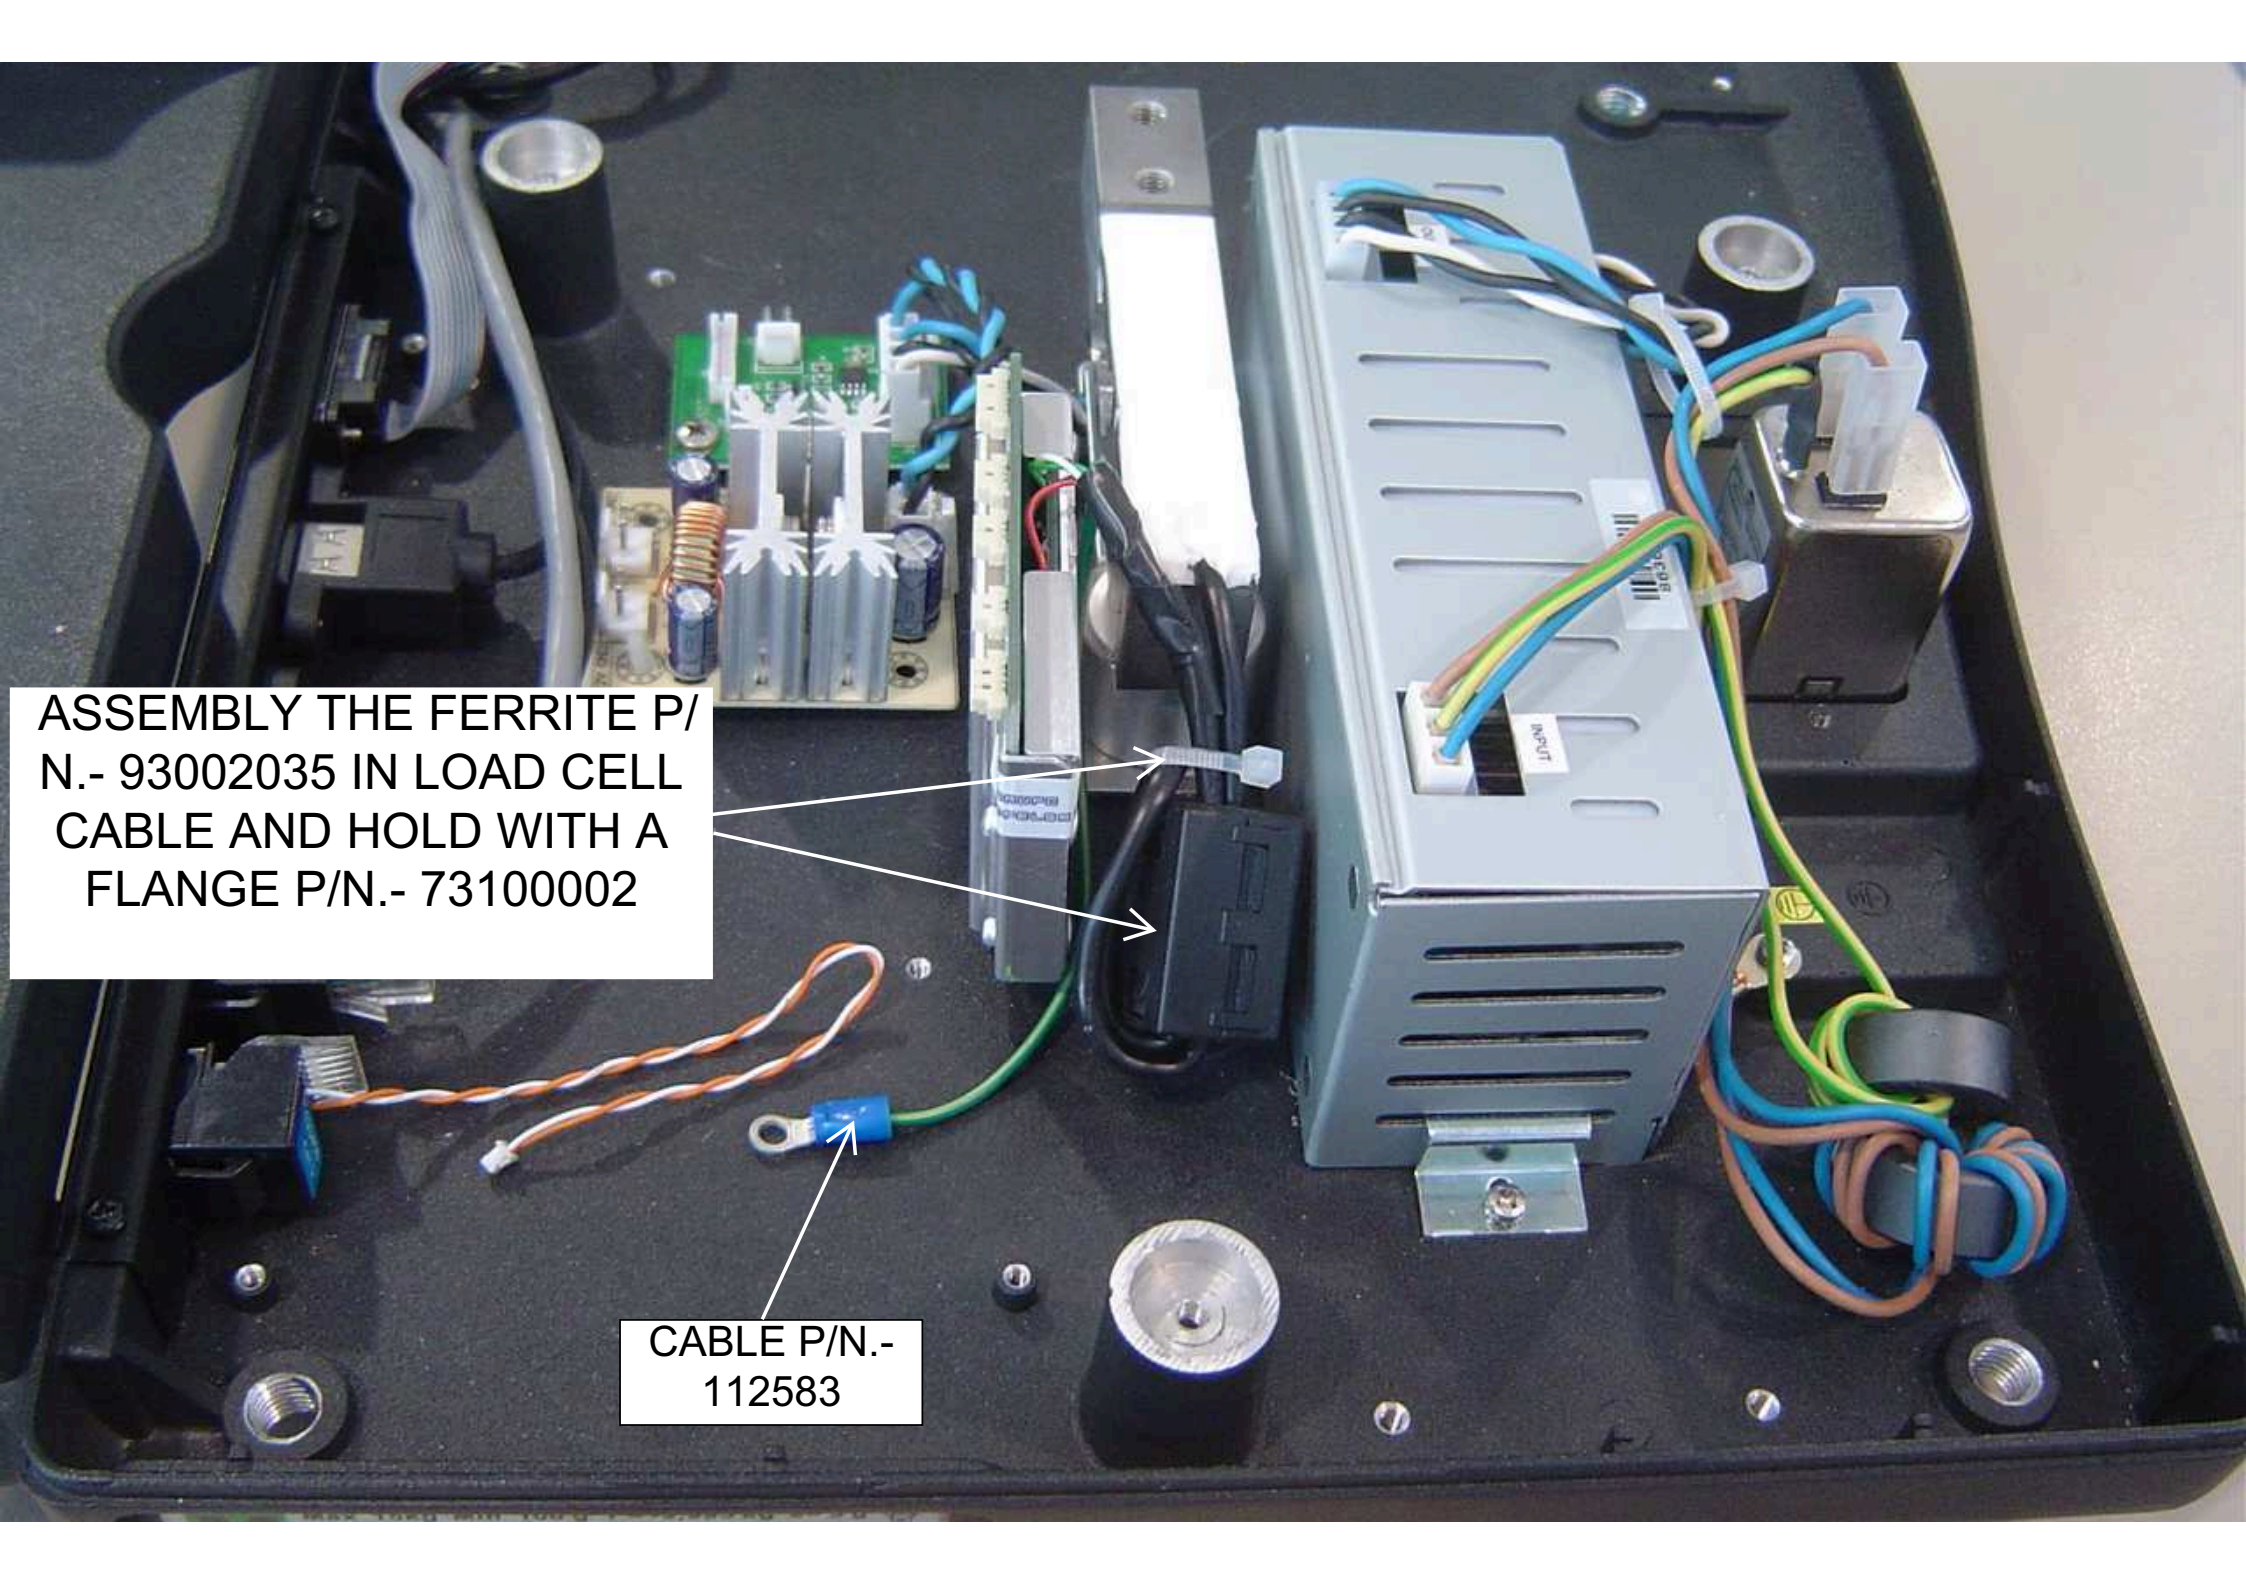

PASTE THE STICKS  
P/N.- 70010155

PASTE THE STICK P/N.-  
70000456

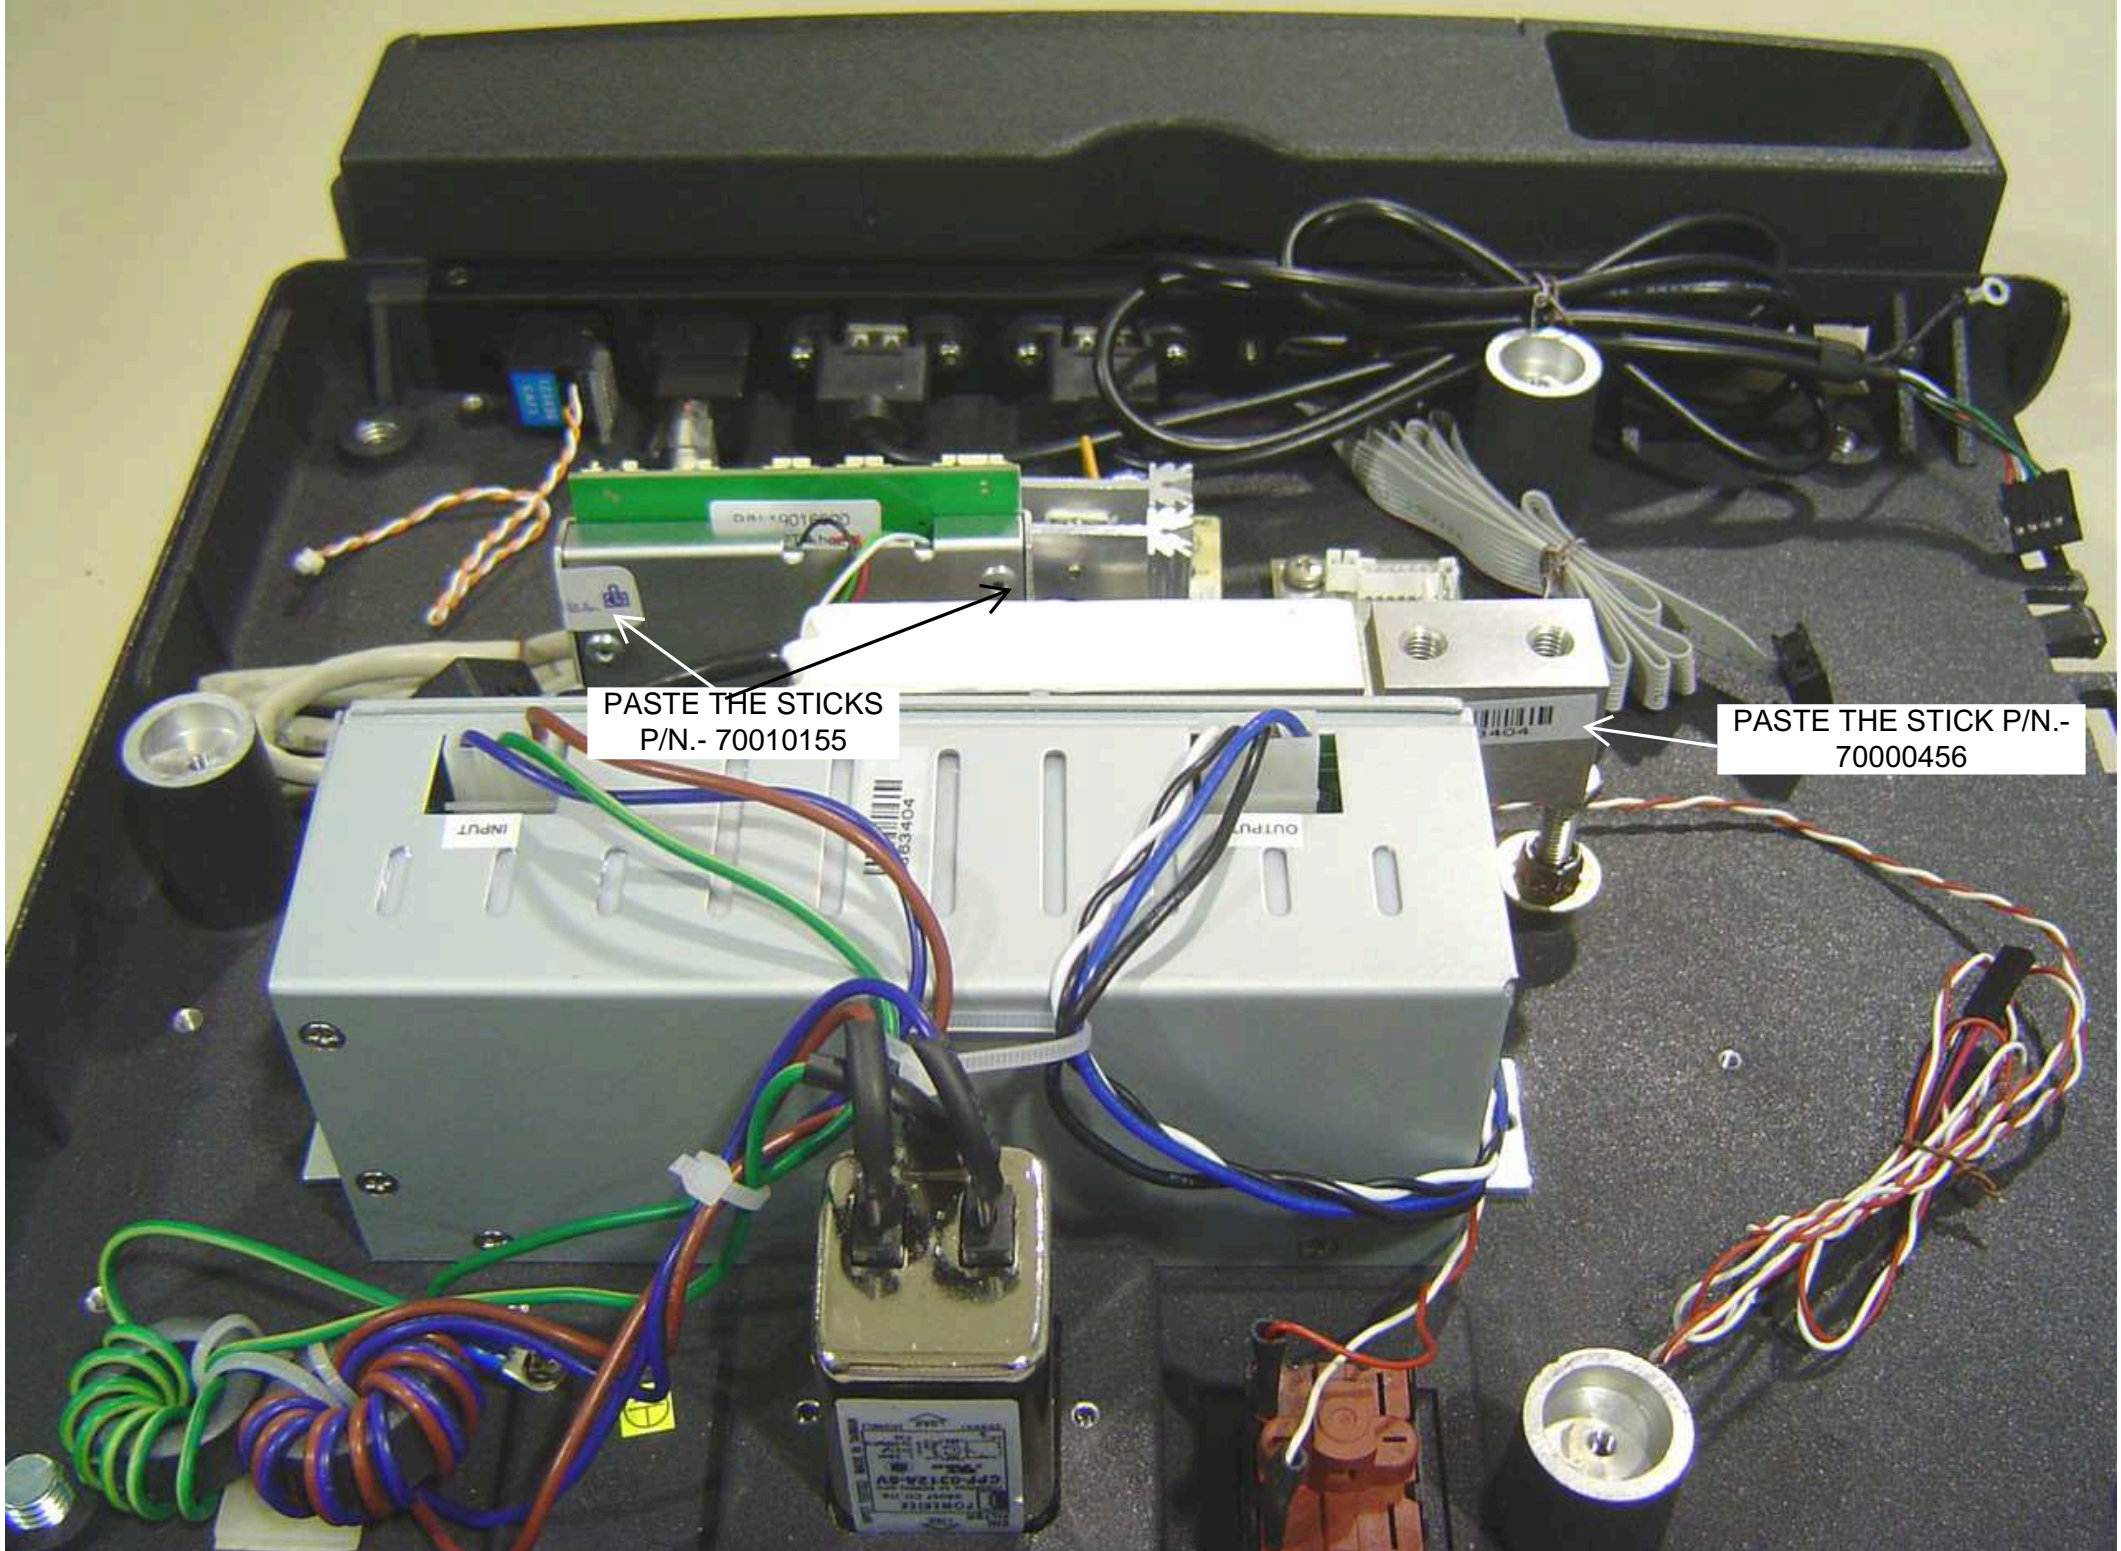

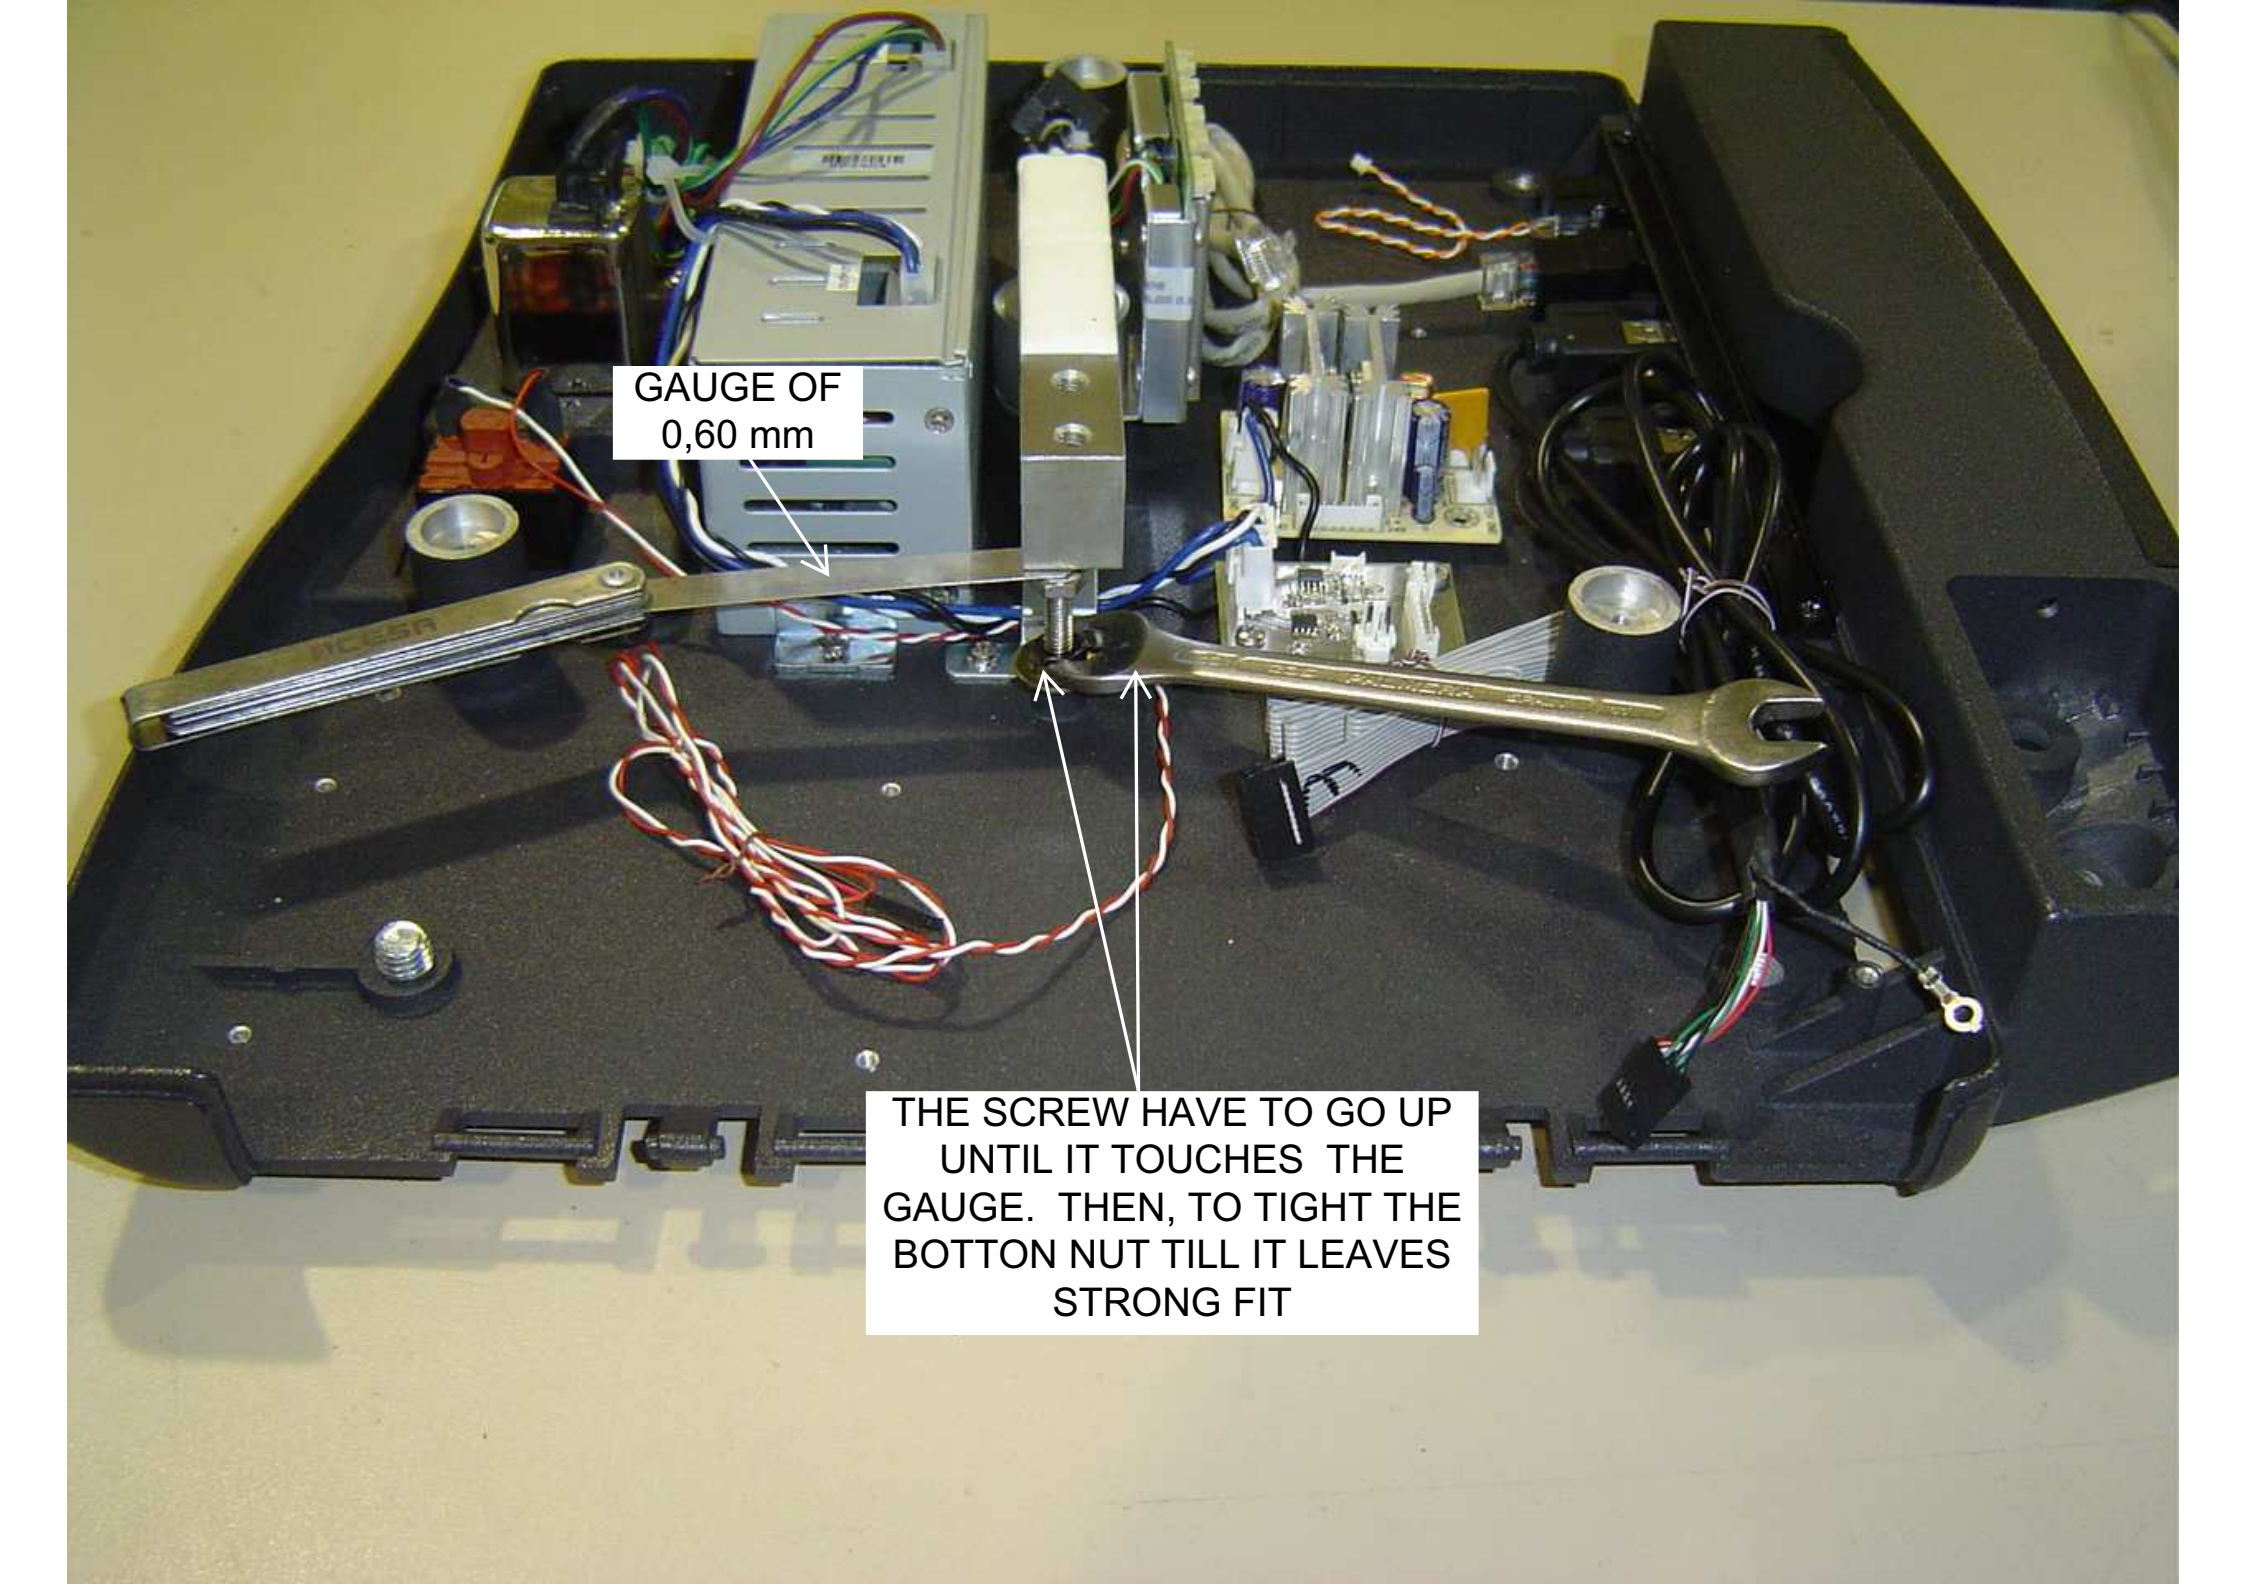

GAUGE OF  
0,60 mm

THE SCREW HAVE TO GO UP  
UNTIL IT TOUCHES THE  
GAUGE. THEN, TO TIGHT THE  
BOTTON NUT TILL IT LEAVES  
STRONG FIT

# 5.- ASSEMBLY COLUMN (COMPONENTS)

P/N.-  
71002285



P/N.- 71000080



P/N.- 71001819



P/N.- 72062035  
(2)



P/N.-  
90113950



P/N.-  
90113951



P/N.-  
90113984



P/N.-  
73100002  
(4)



P/N.-  
90114081



CONNECT  
CABLE P/N.-  
90114081 IN J3  
IN MBPTC  
BOARD AND  
SWICHT BOARD


CONNECT CABLE P/N.-  
90113984 IN SWICHT  
BOARD AND PASS  
DOWN CABLE GUIDE TO  
CONNECT IN J1 IN BPTC  
BOARD

CONNECT  
CABLE P/N.-  
90113951


CONNECT  
CABLE P/N.-  
90113952 IN J4  
IN BPTC  
BOARD

HOLD THE  
TERMINALS OF  
CABLE P/N.-  
90114081 AND  
LOAD CELL WITH  
SCREW P/N.-  
72031015

CONNECT CABLE  
P/N.- 90113950 IN  
POWER SUPPLY

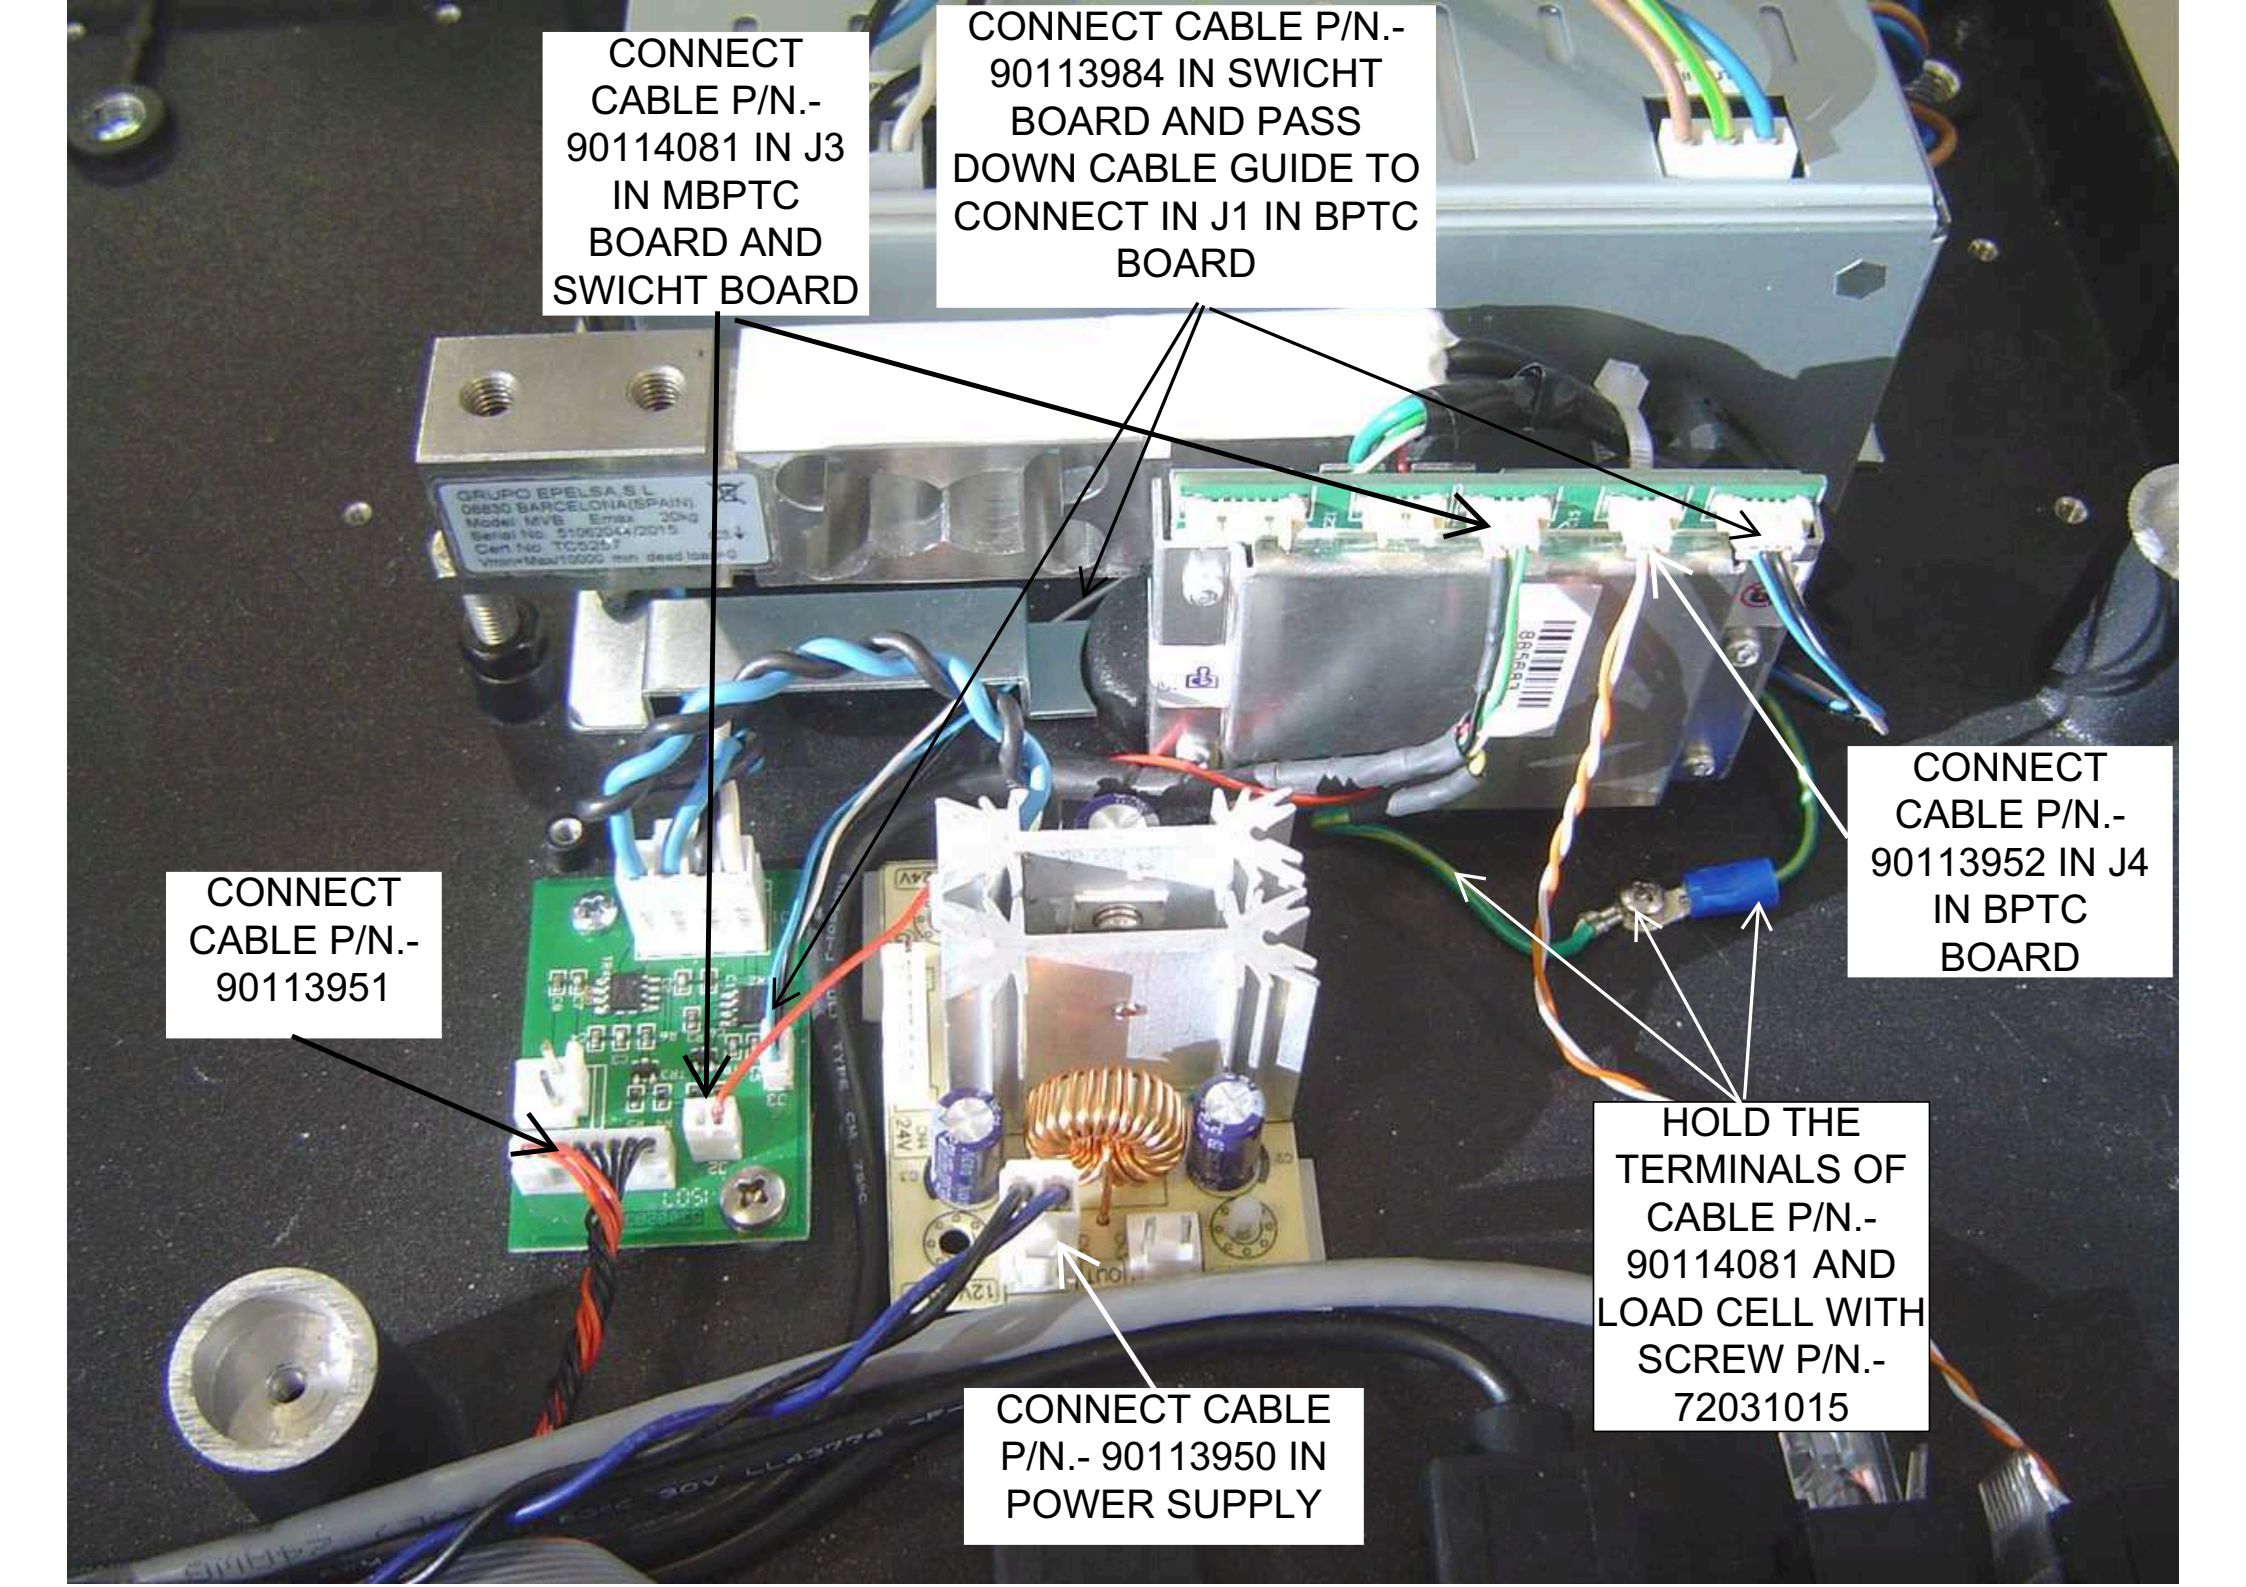


# OVERVIEW

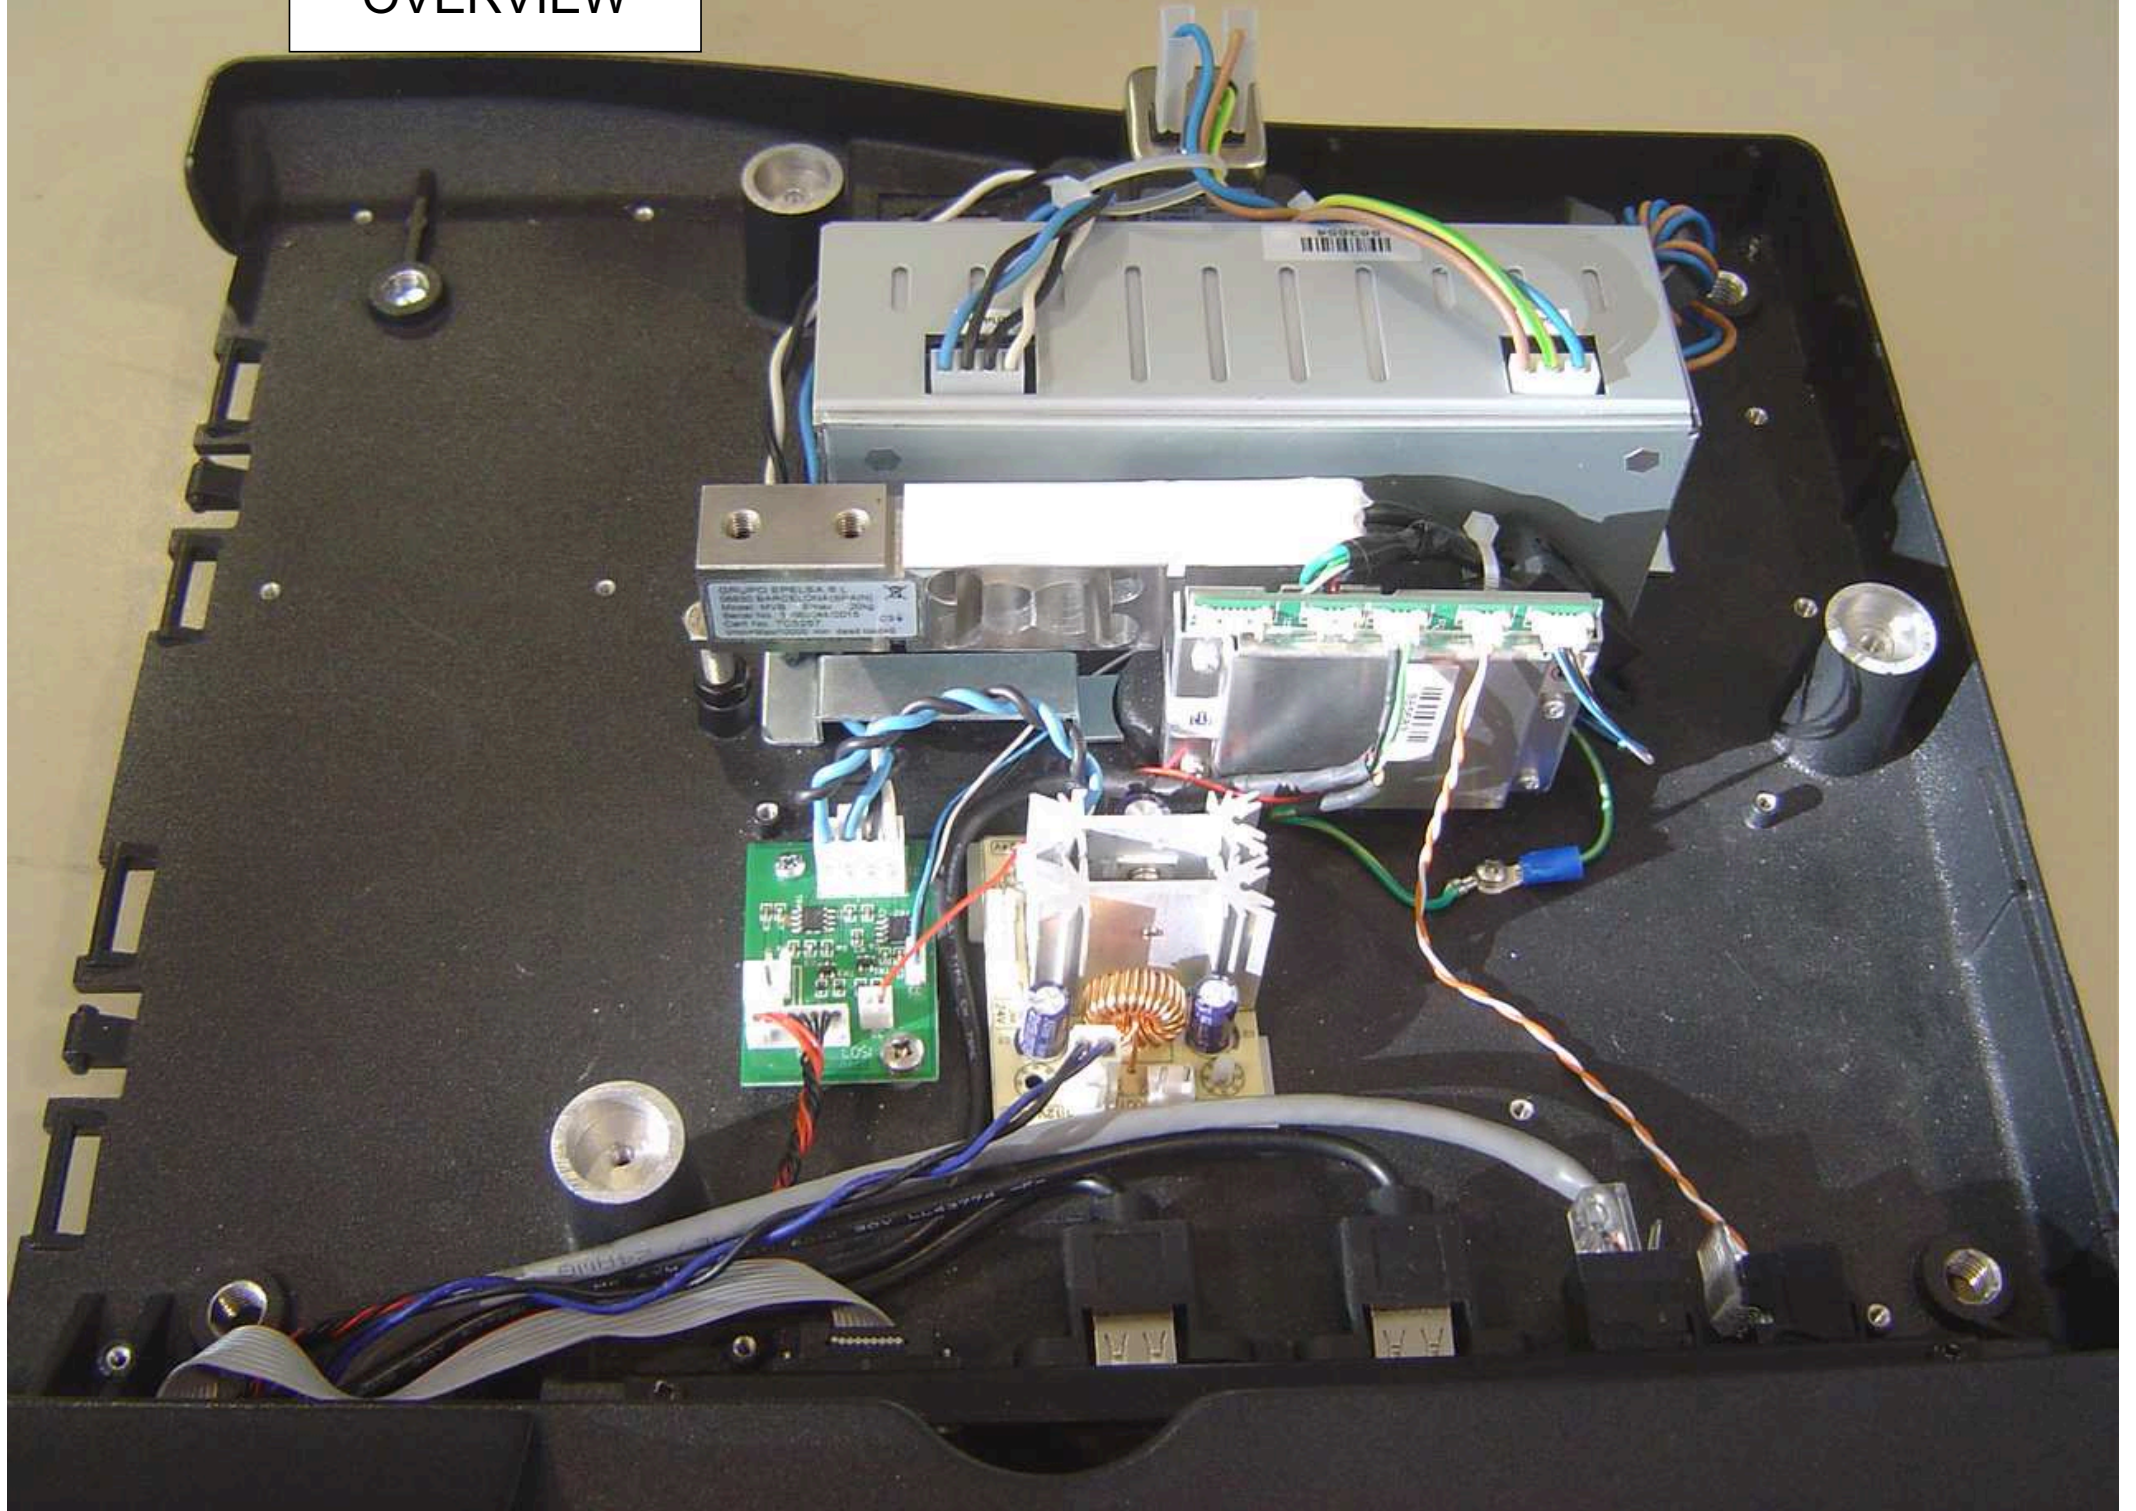



HOLD THE CABLES  
WITH FLANGES P/N.-  
73100002


HOLD THE  
CABLES WITH  
FLANGES P/N.-  
73100002. NOT  
TIGHTEN FOR  
THE CABLES  
CAN MOVE

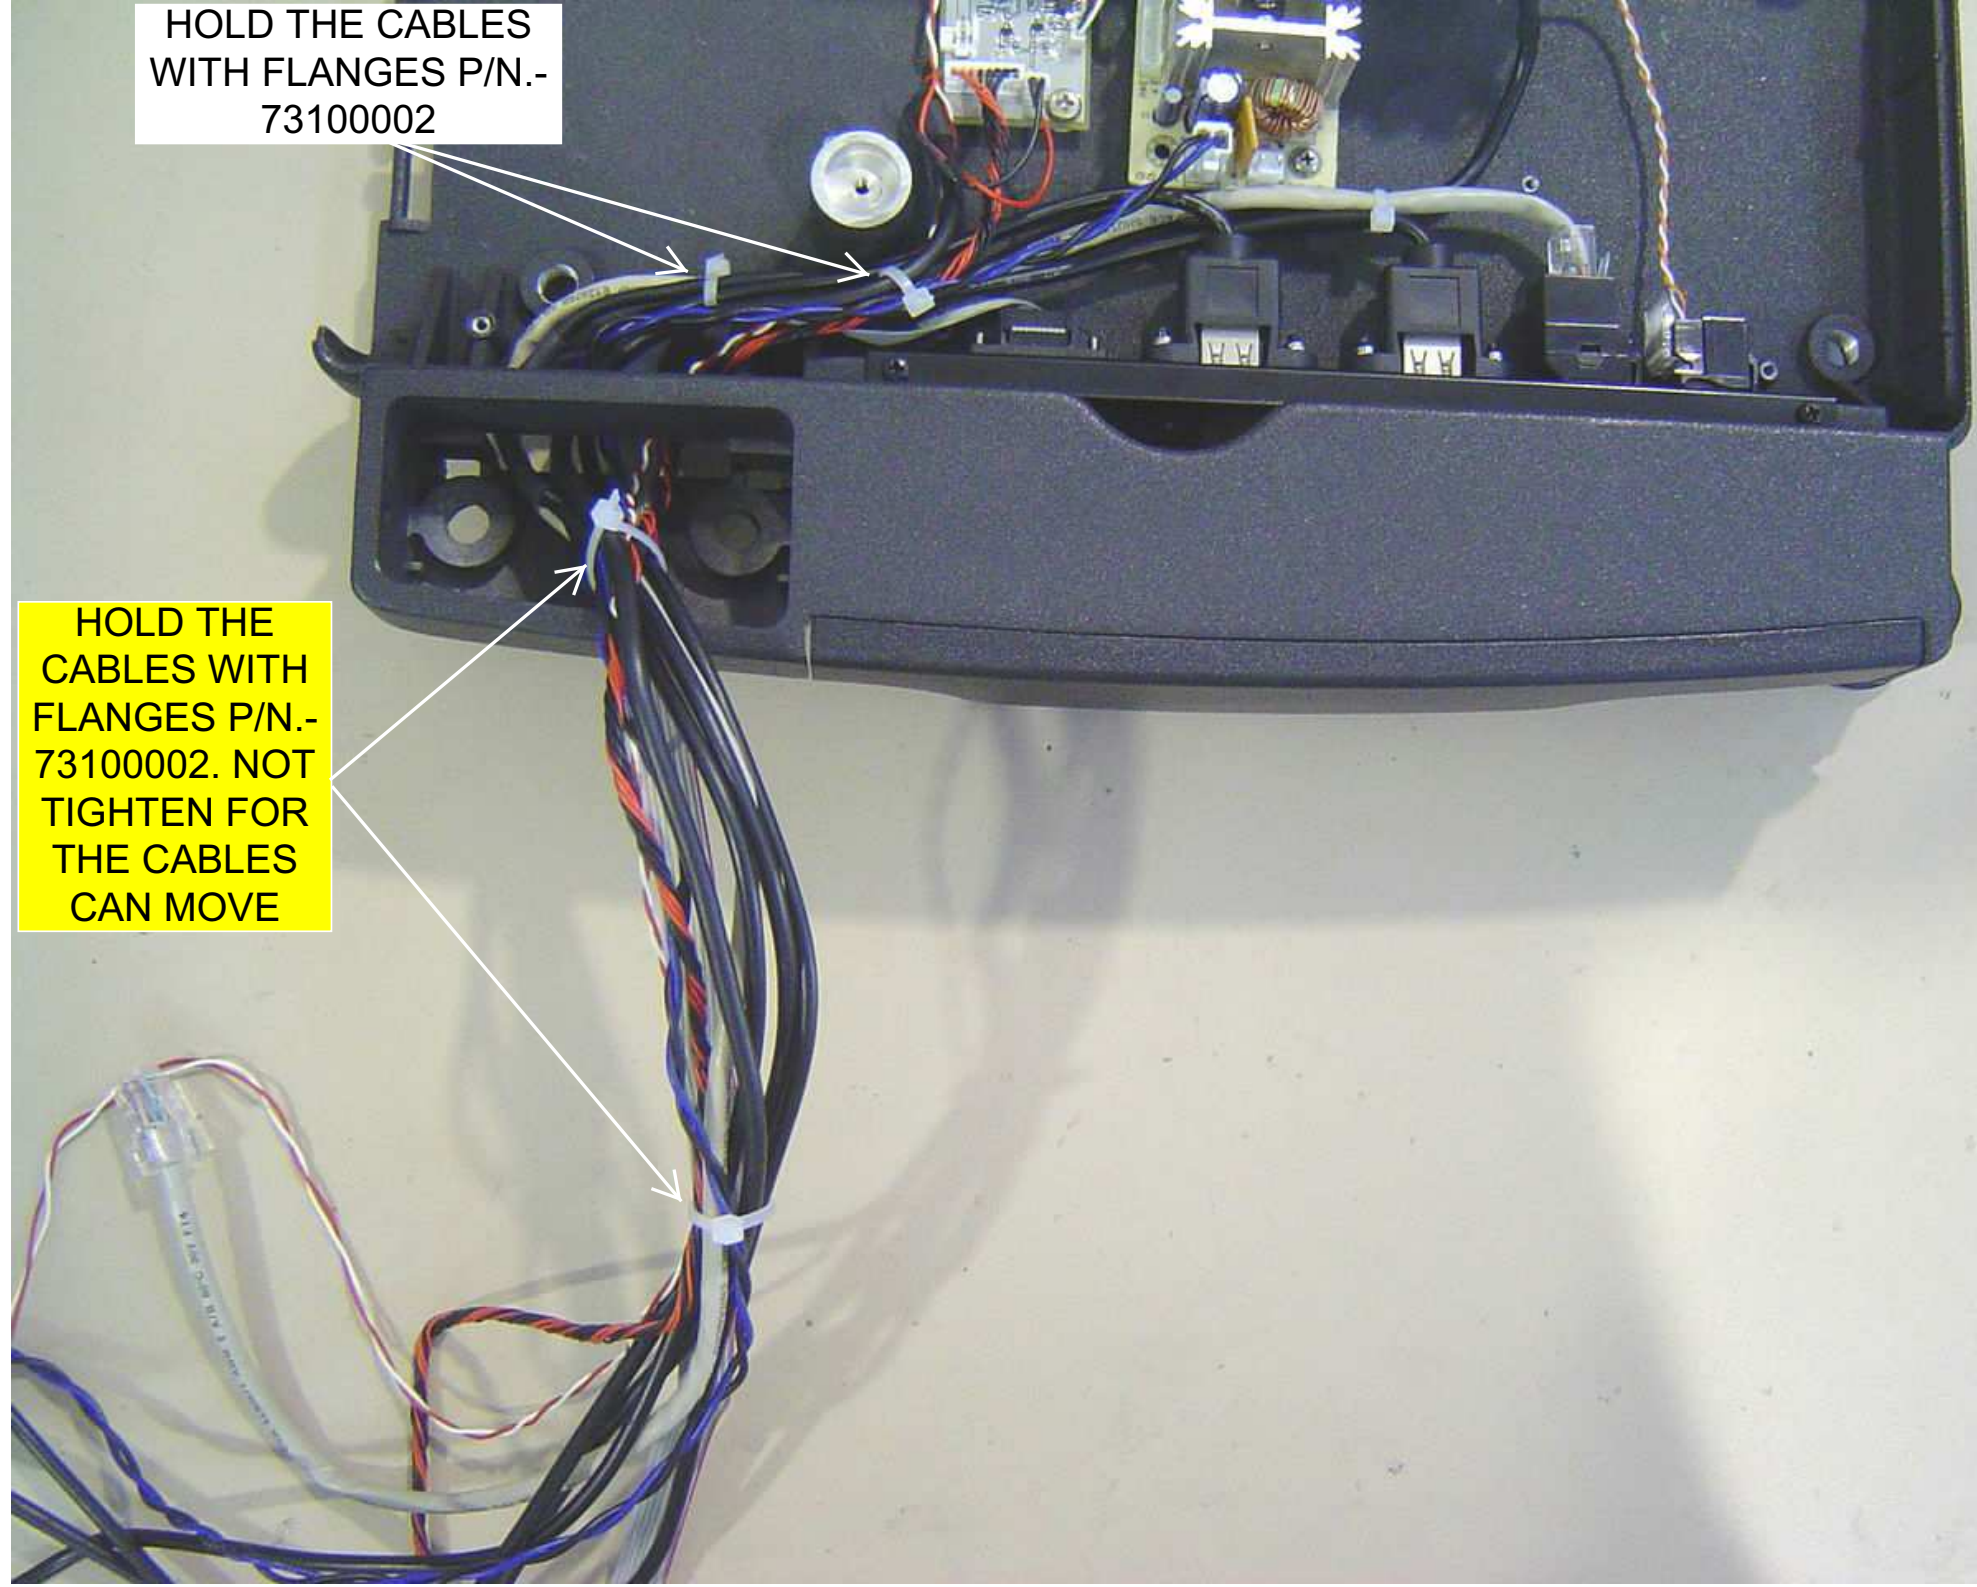

INSERT COVER RUBBER,  
IN THE RIGHT POSITION,  
P/N.- 71000080 IN COLUMN  
P/N.- 71002285



PASS THE CABLES  
THROUGH THE  
COLUMN AND PUT  
IT IN BASE

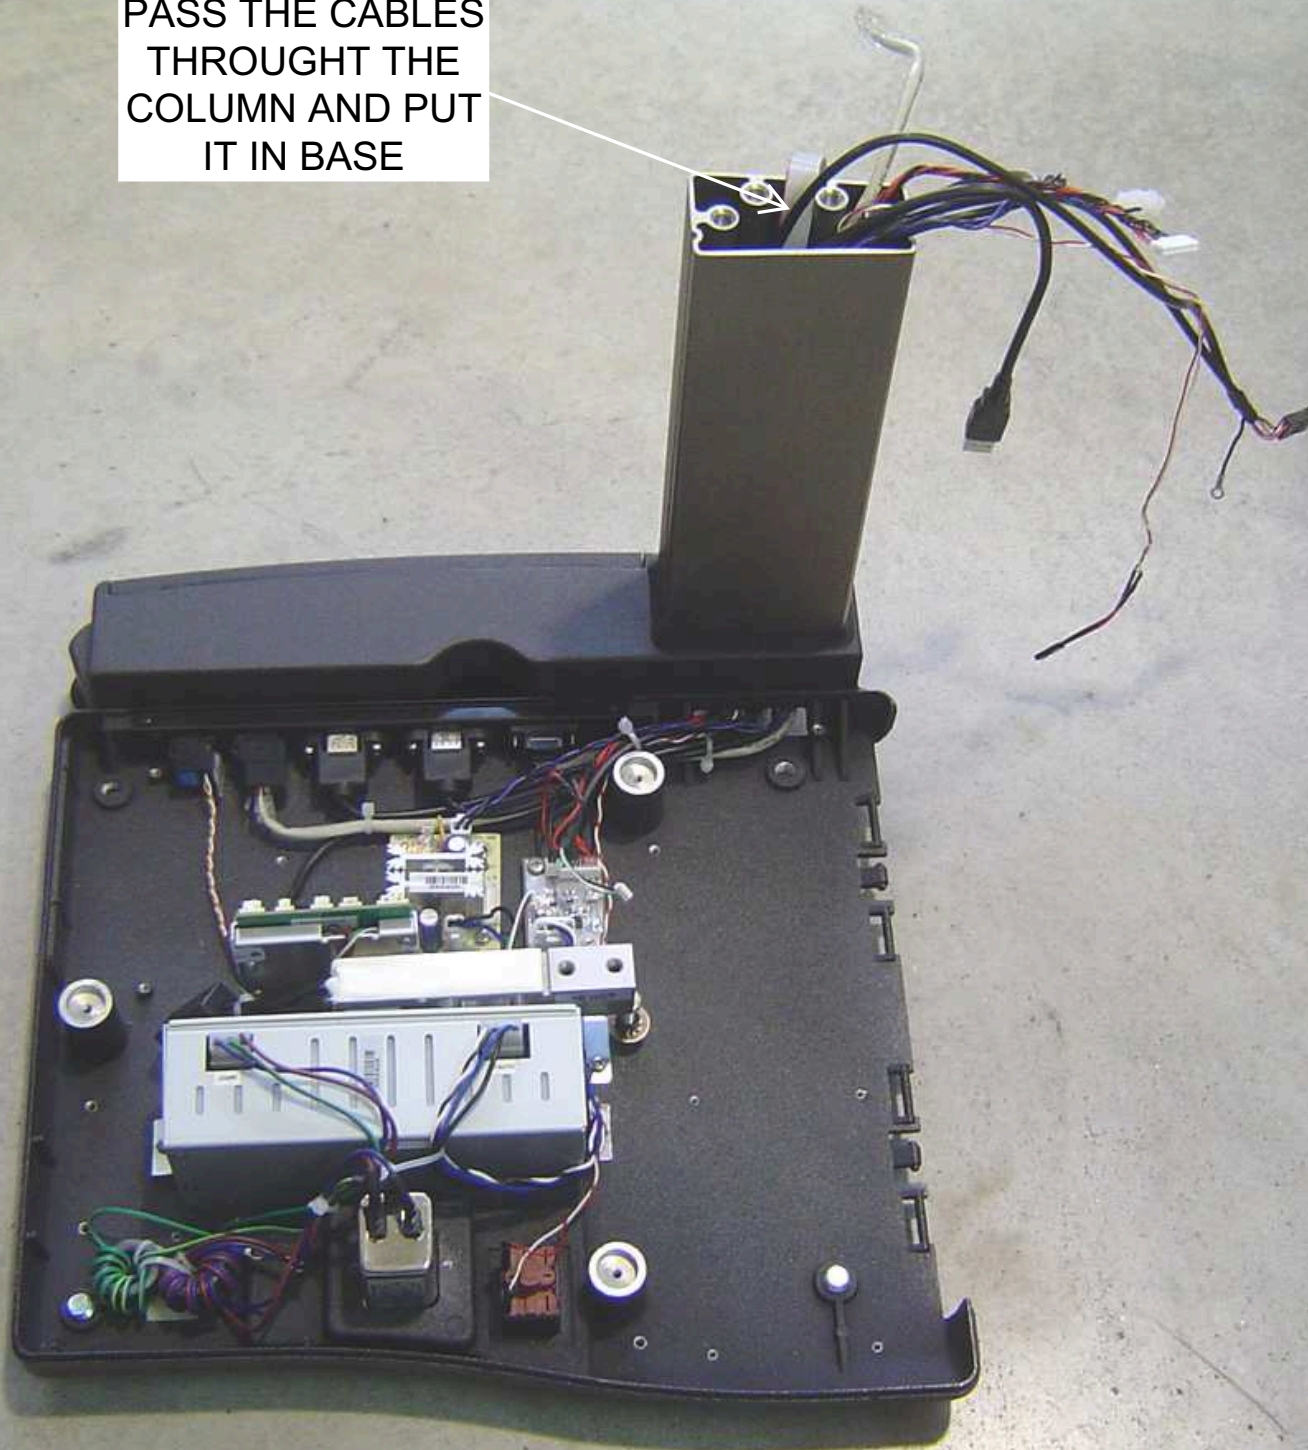

HOLD THE COLUMN WITH 2 SCREWS P/N.-  
72062035. TIGHTEN WITH A REGULATED TOOL  
TO A TIGHTENING TORQUE 11 Nm

TO PUT COVER  
P/N.- 71001819



## 6. ASSEMBLY COVER (COMPONENTS )

P/N.- 71004341



P/N.-  
79000015



P/N.- 71000055 (3)




P/N.- 72031026 (3)

P/N.- 71004341


P/N.- 79000015

P/N:  
- 71004435 (BLACK)  
- 71004464 (WHITE)

P/N.-  
71000055

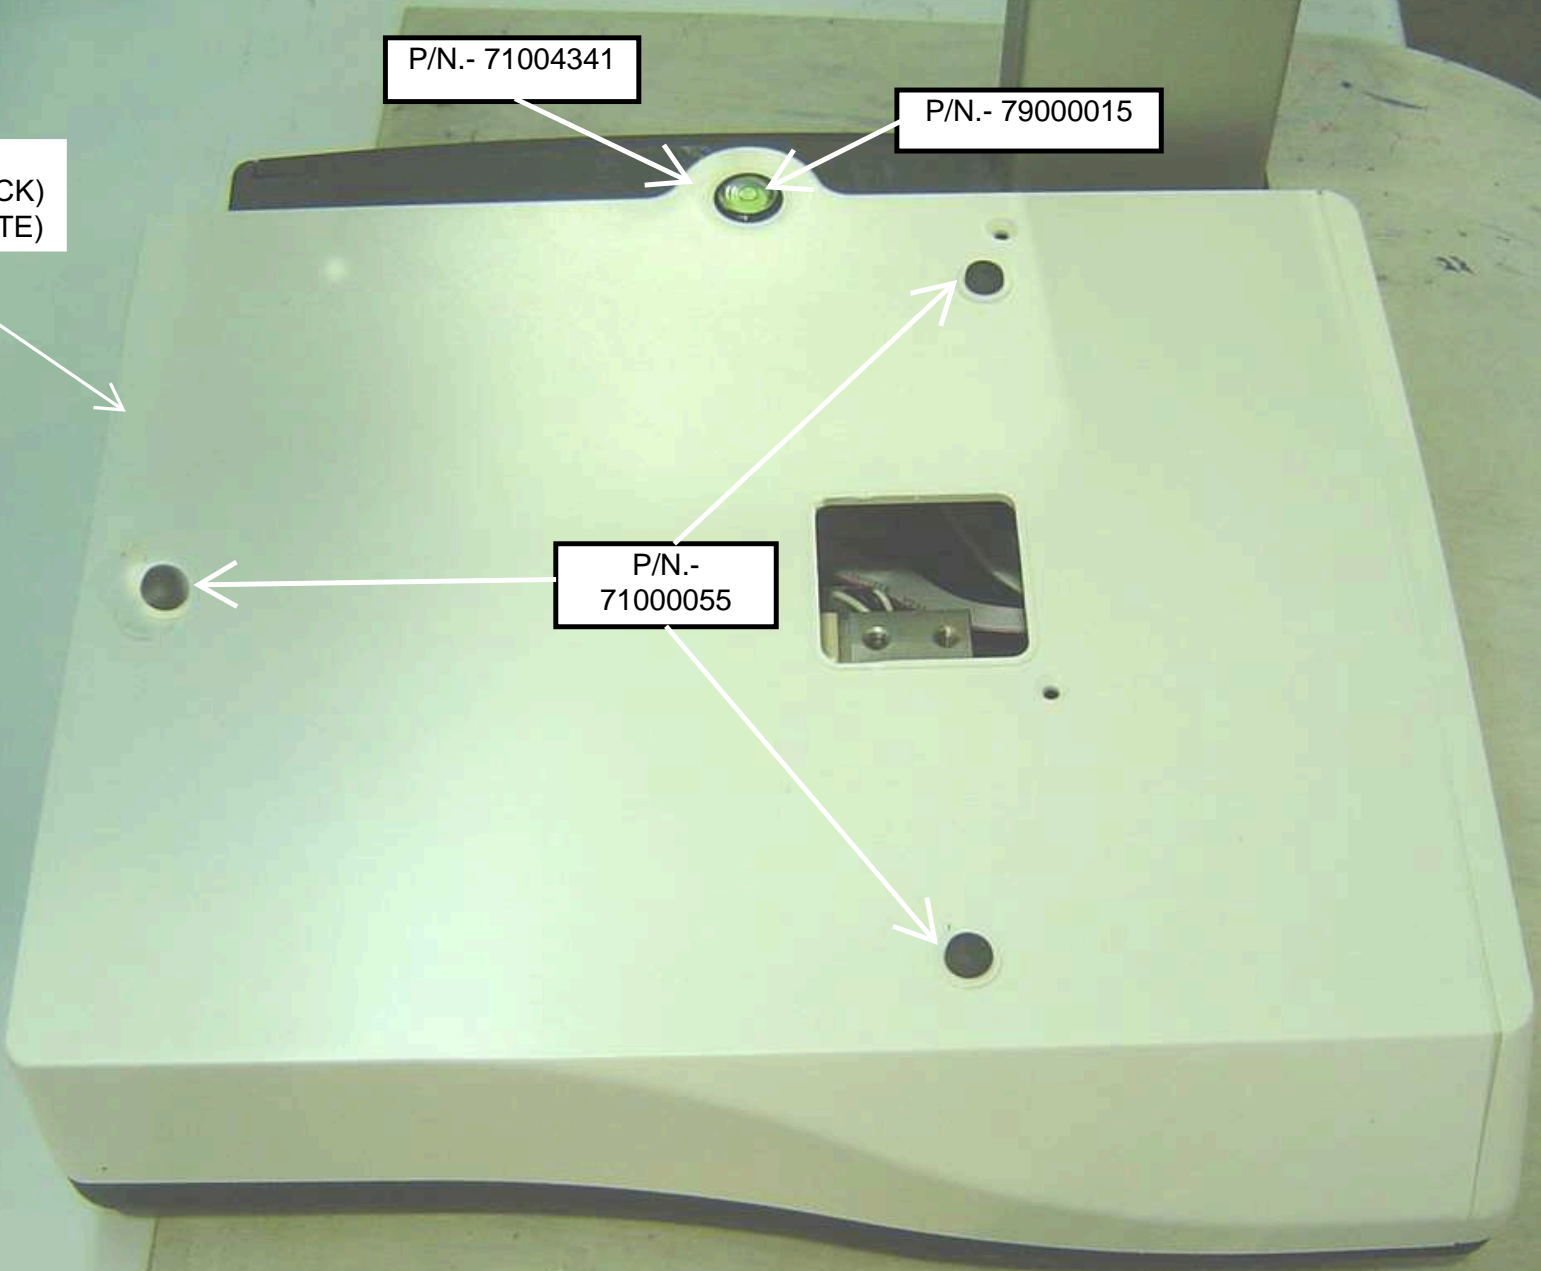


# 7.- ASSEMBLY UP CROSS AND PUT PANSCALE (COMPONENTS )

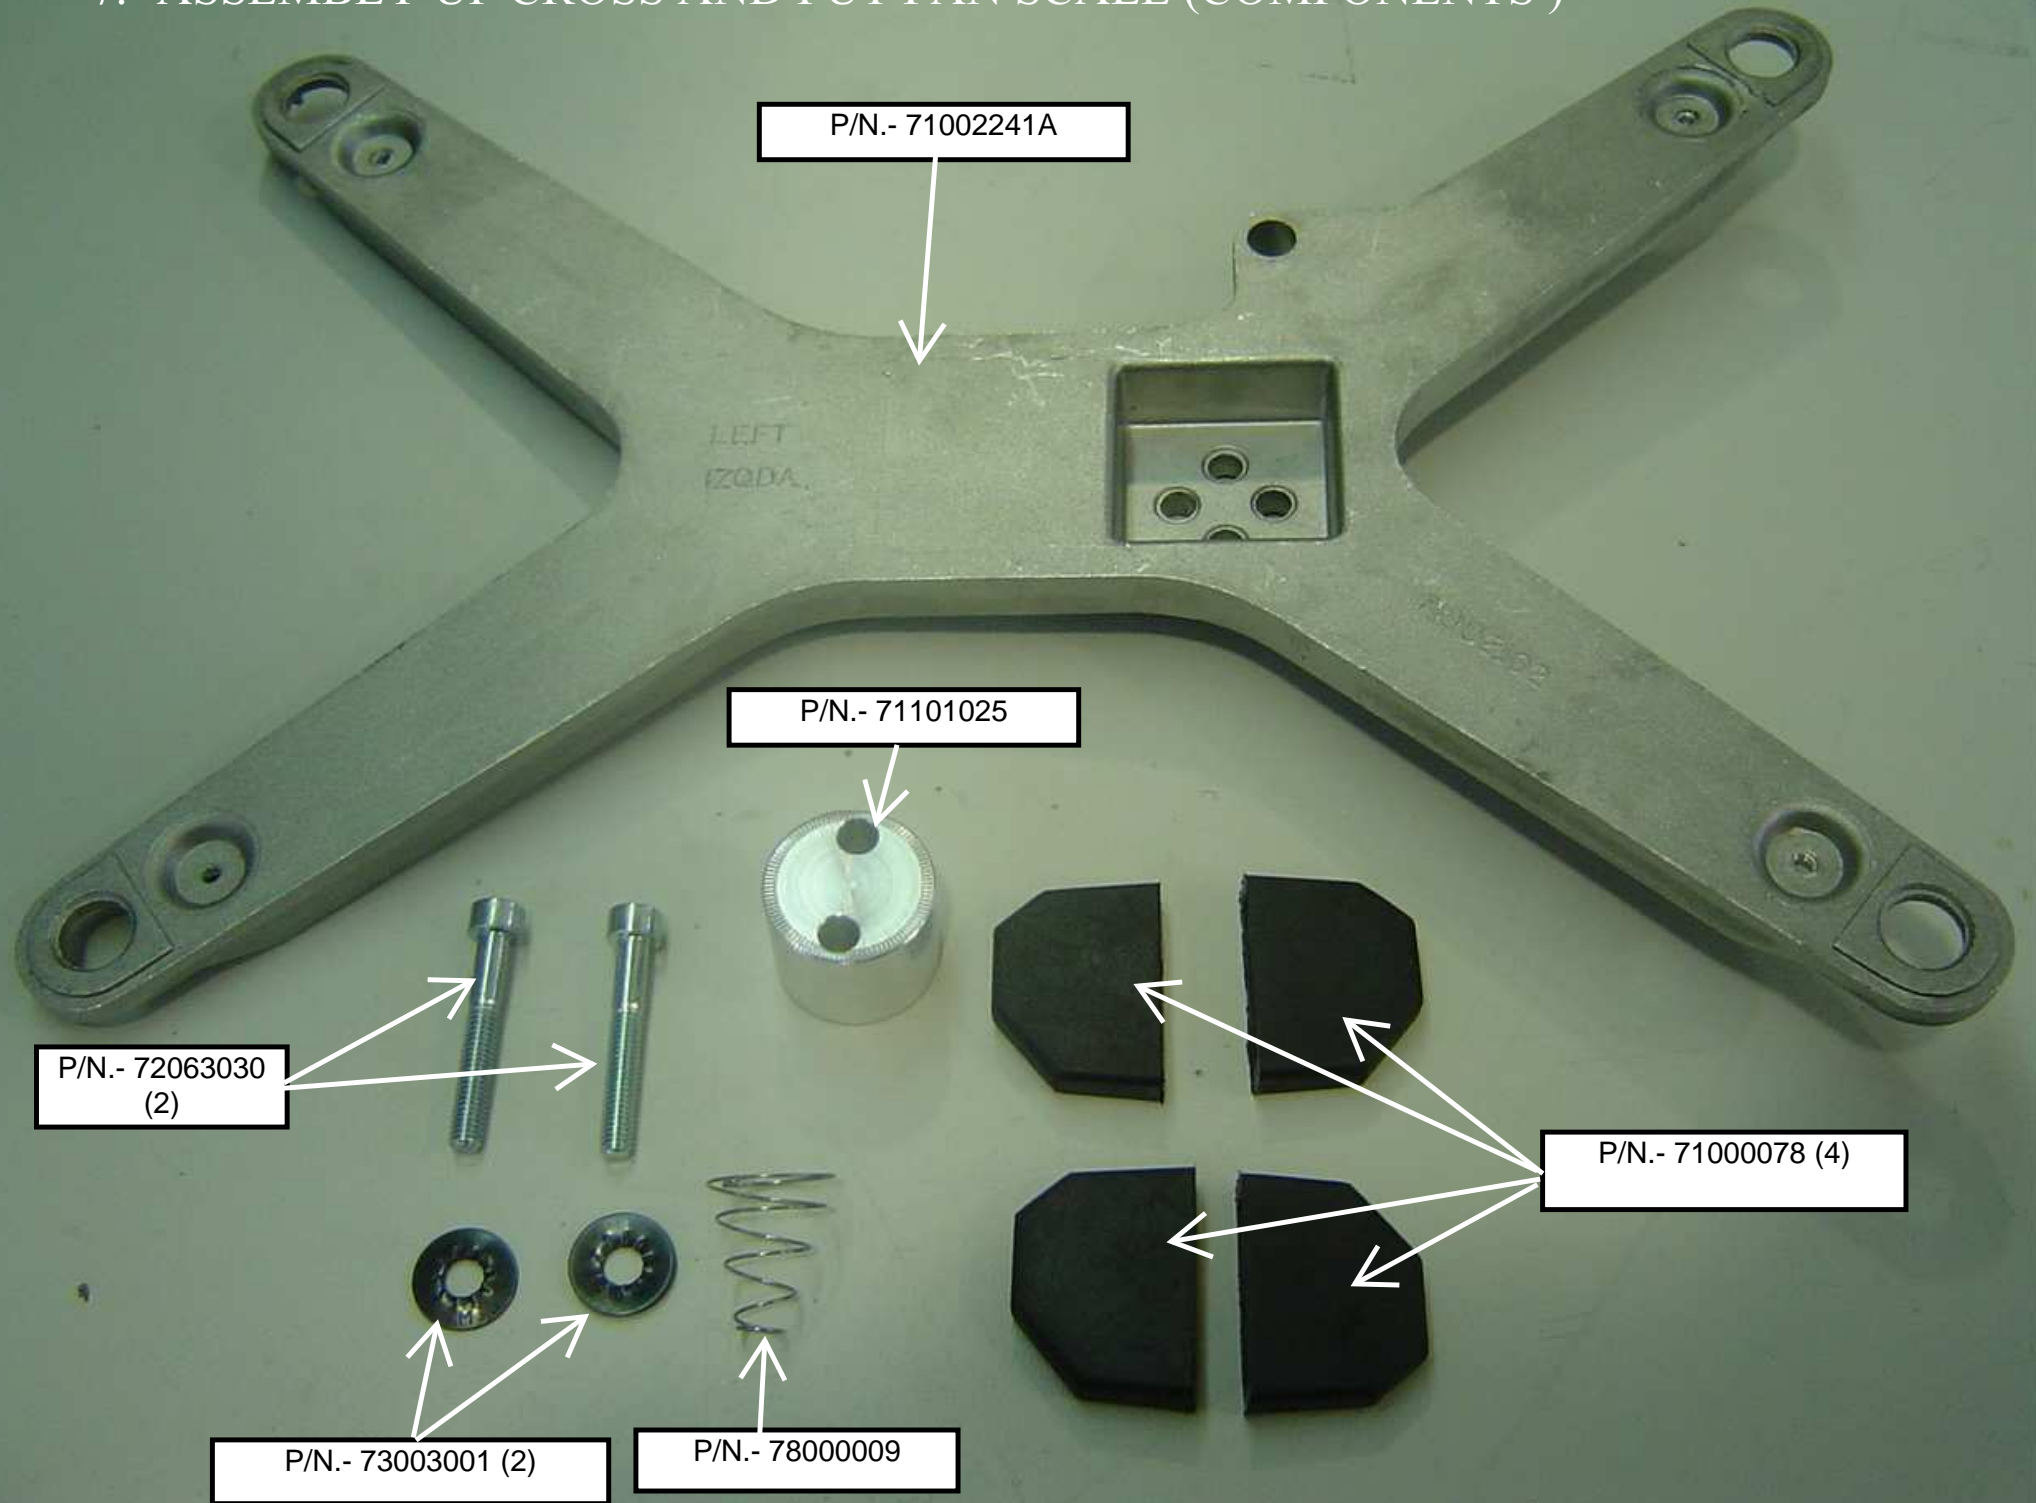

P/N.- 71101025





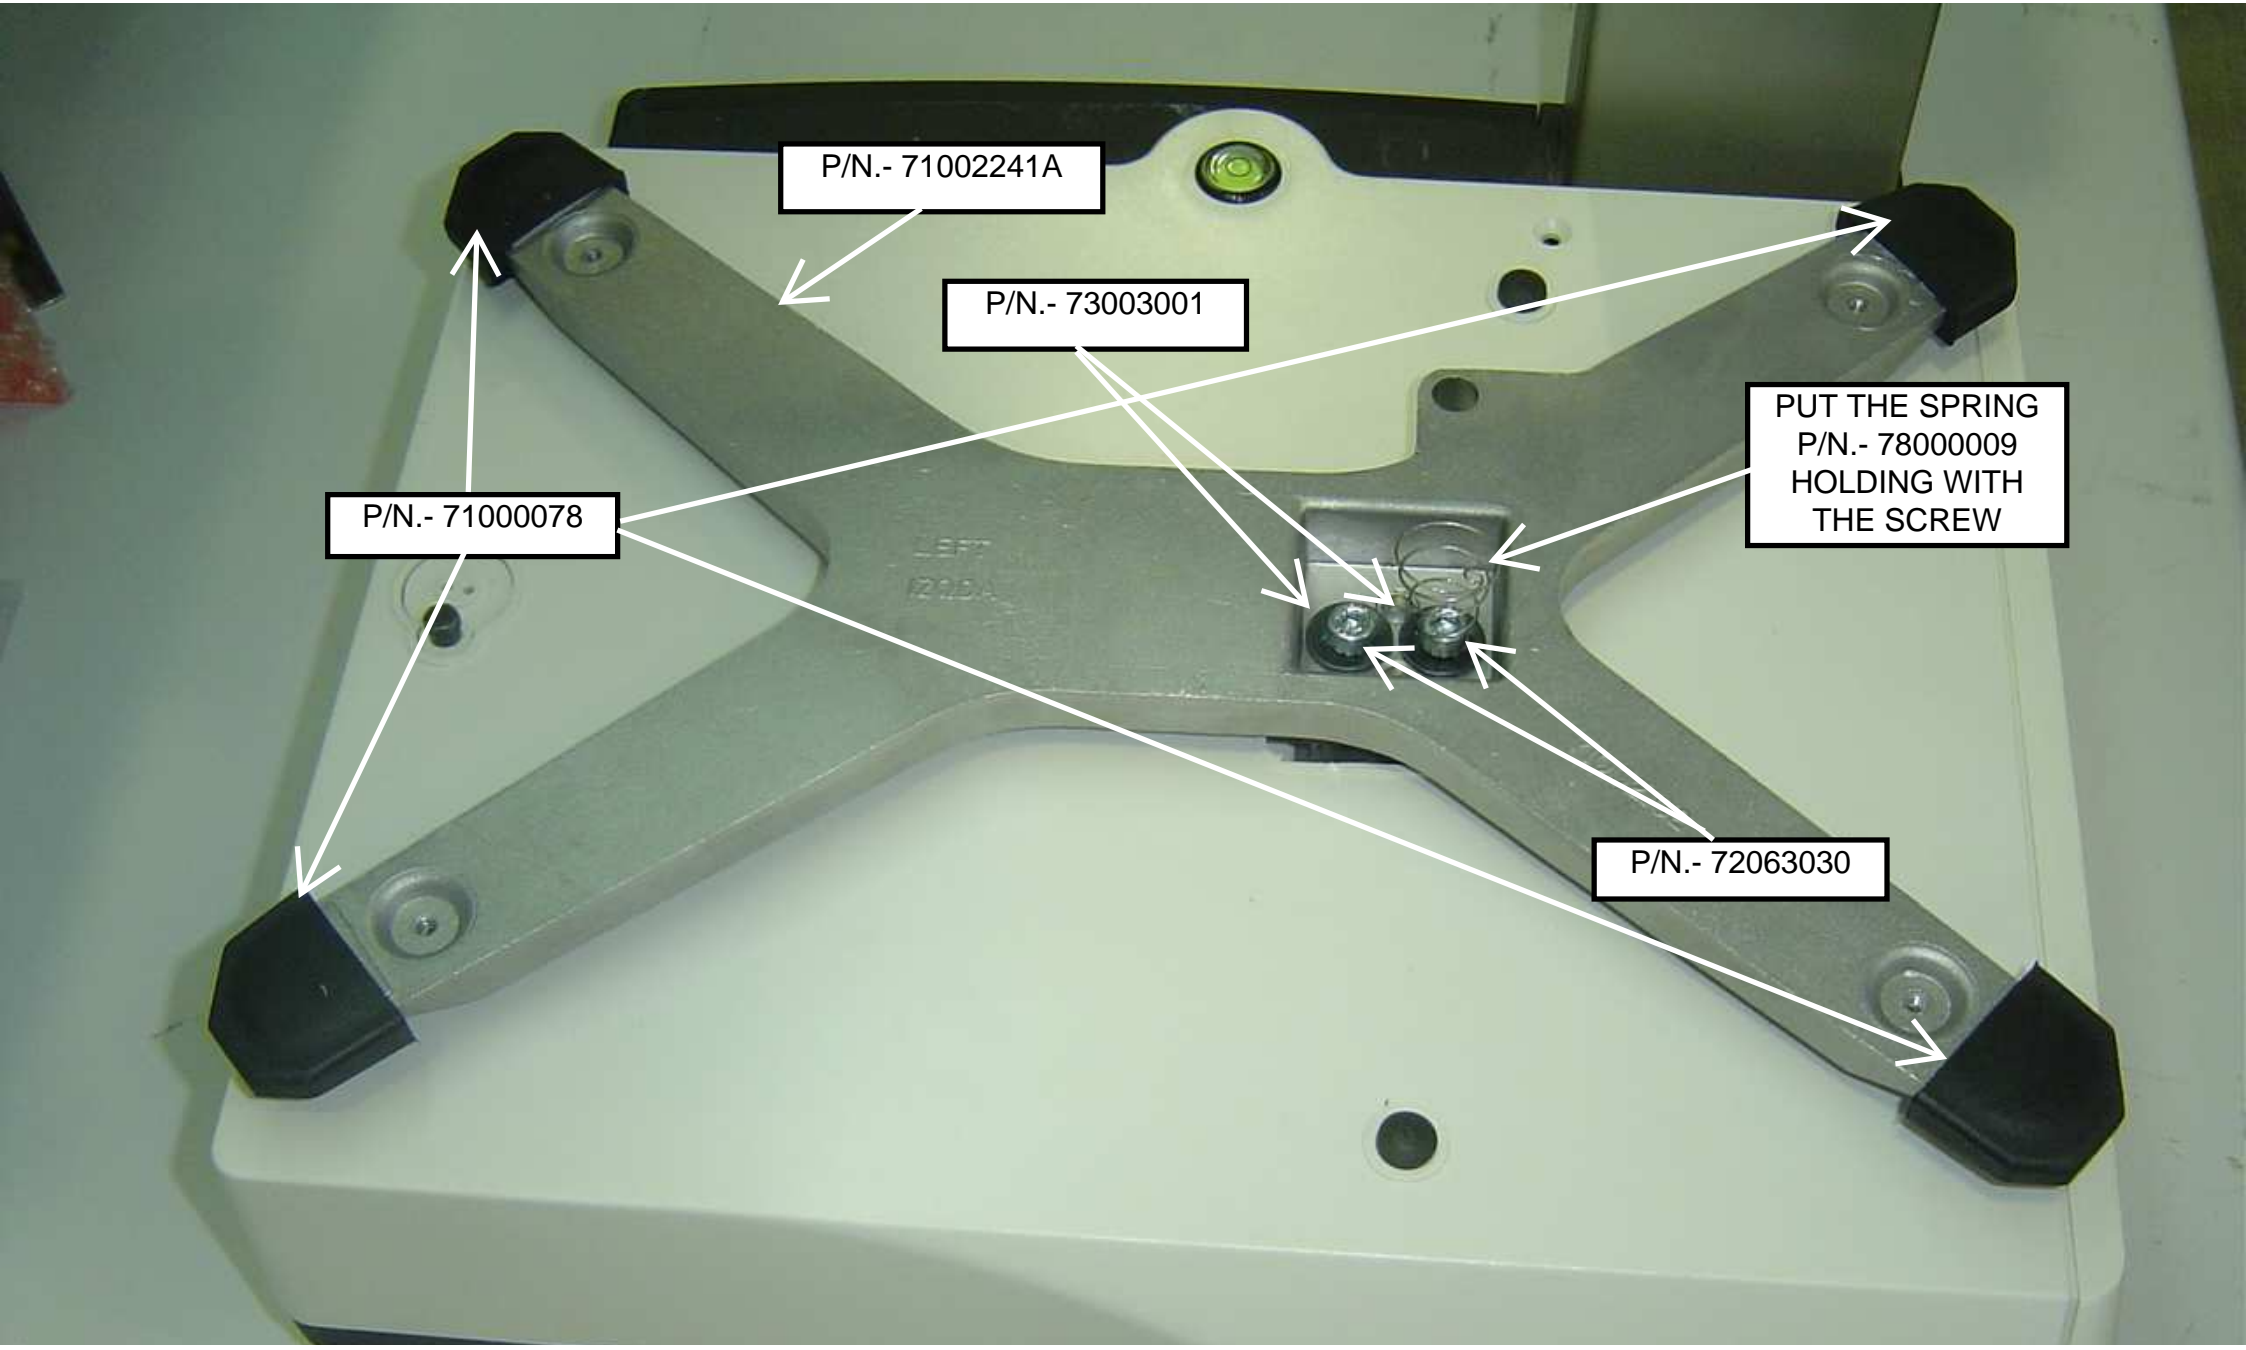

P/N.- 71002241A

P/N.- 73003001

PUT THE SPRING  
P/N.- 78000009  
HOLDING WITH  
THE SCREW

P/N.- 71000078

P/N.- 72063030

LEFT  
1222A



TIGHTEN WITH A  
REGULATED  
TOOL TO A  
TIGHTENING  
TORQUE 11 Nm

PUT PAN  
SCALE P/N.-  
71210246



8.- ASSEMBLY BOTTOM  
CONSOLE (COMPONENTS )

REMOVE THIS PIECE,  
CUTTING FOUR FIXING


P/N.-  
71004453

REMOVE THIS PIECE,  
CUTTING FOUR  
FIXING




P/N.- 72062035  
(4)

PASS THE CABLES  
THROUGH THE HOLE AND  
HOLD WITH 4 SCREWS P/  
N.- 72062035, TIGHTEN  
WITH A REGULATED TOOL  
TO A TIGHTENING TORQUE  
4,5 Nm

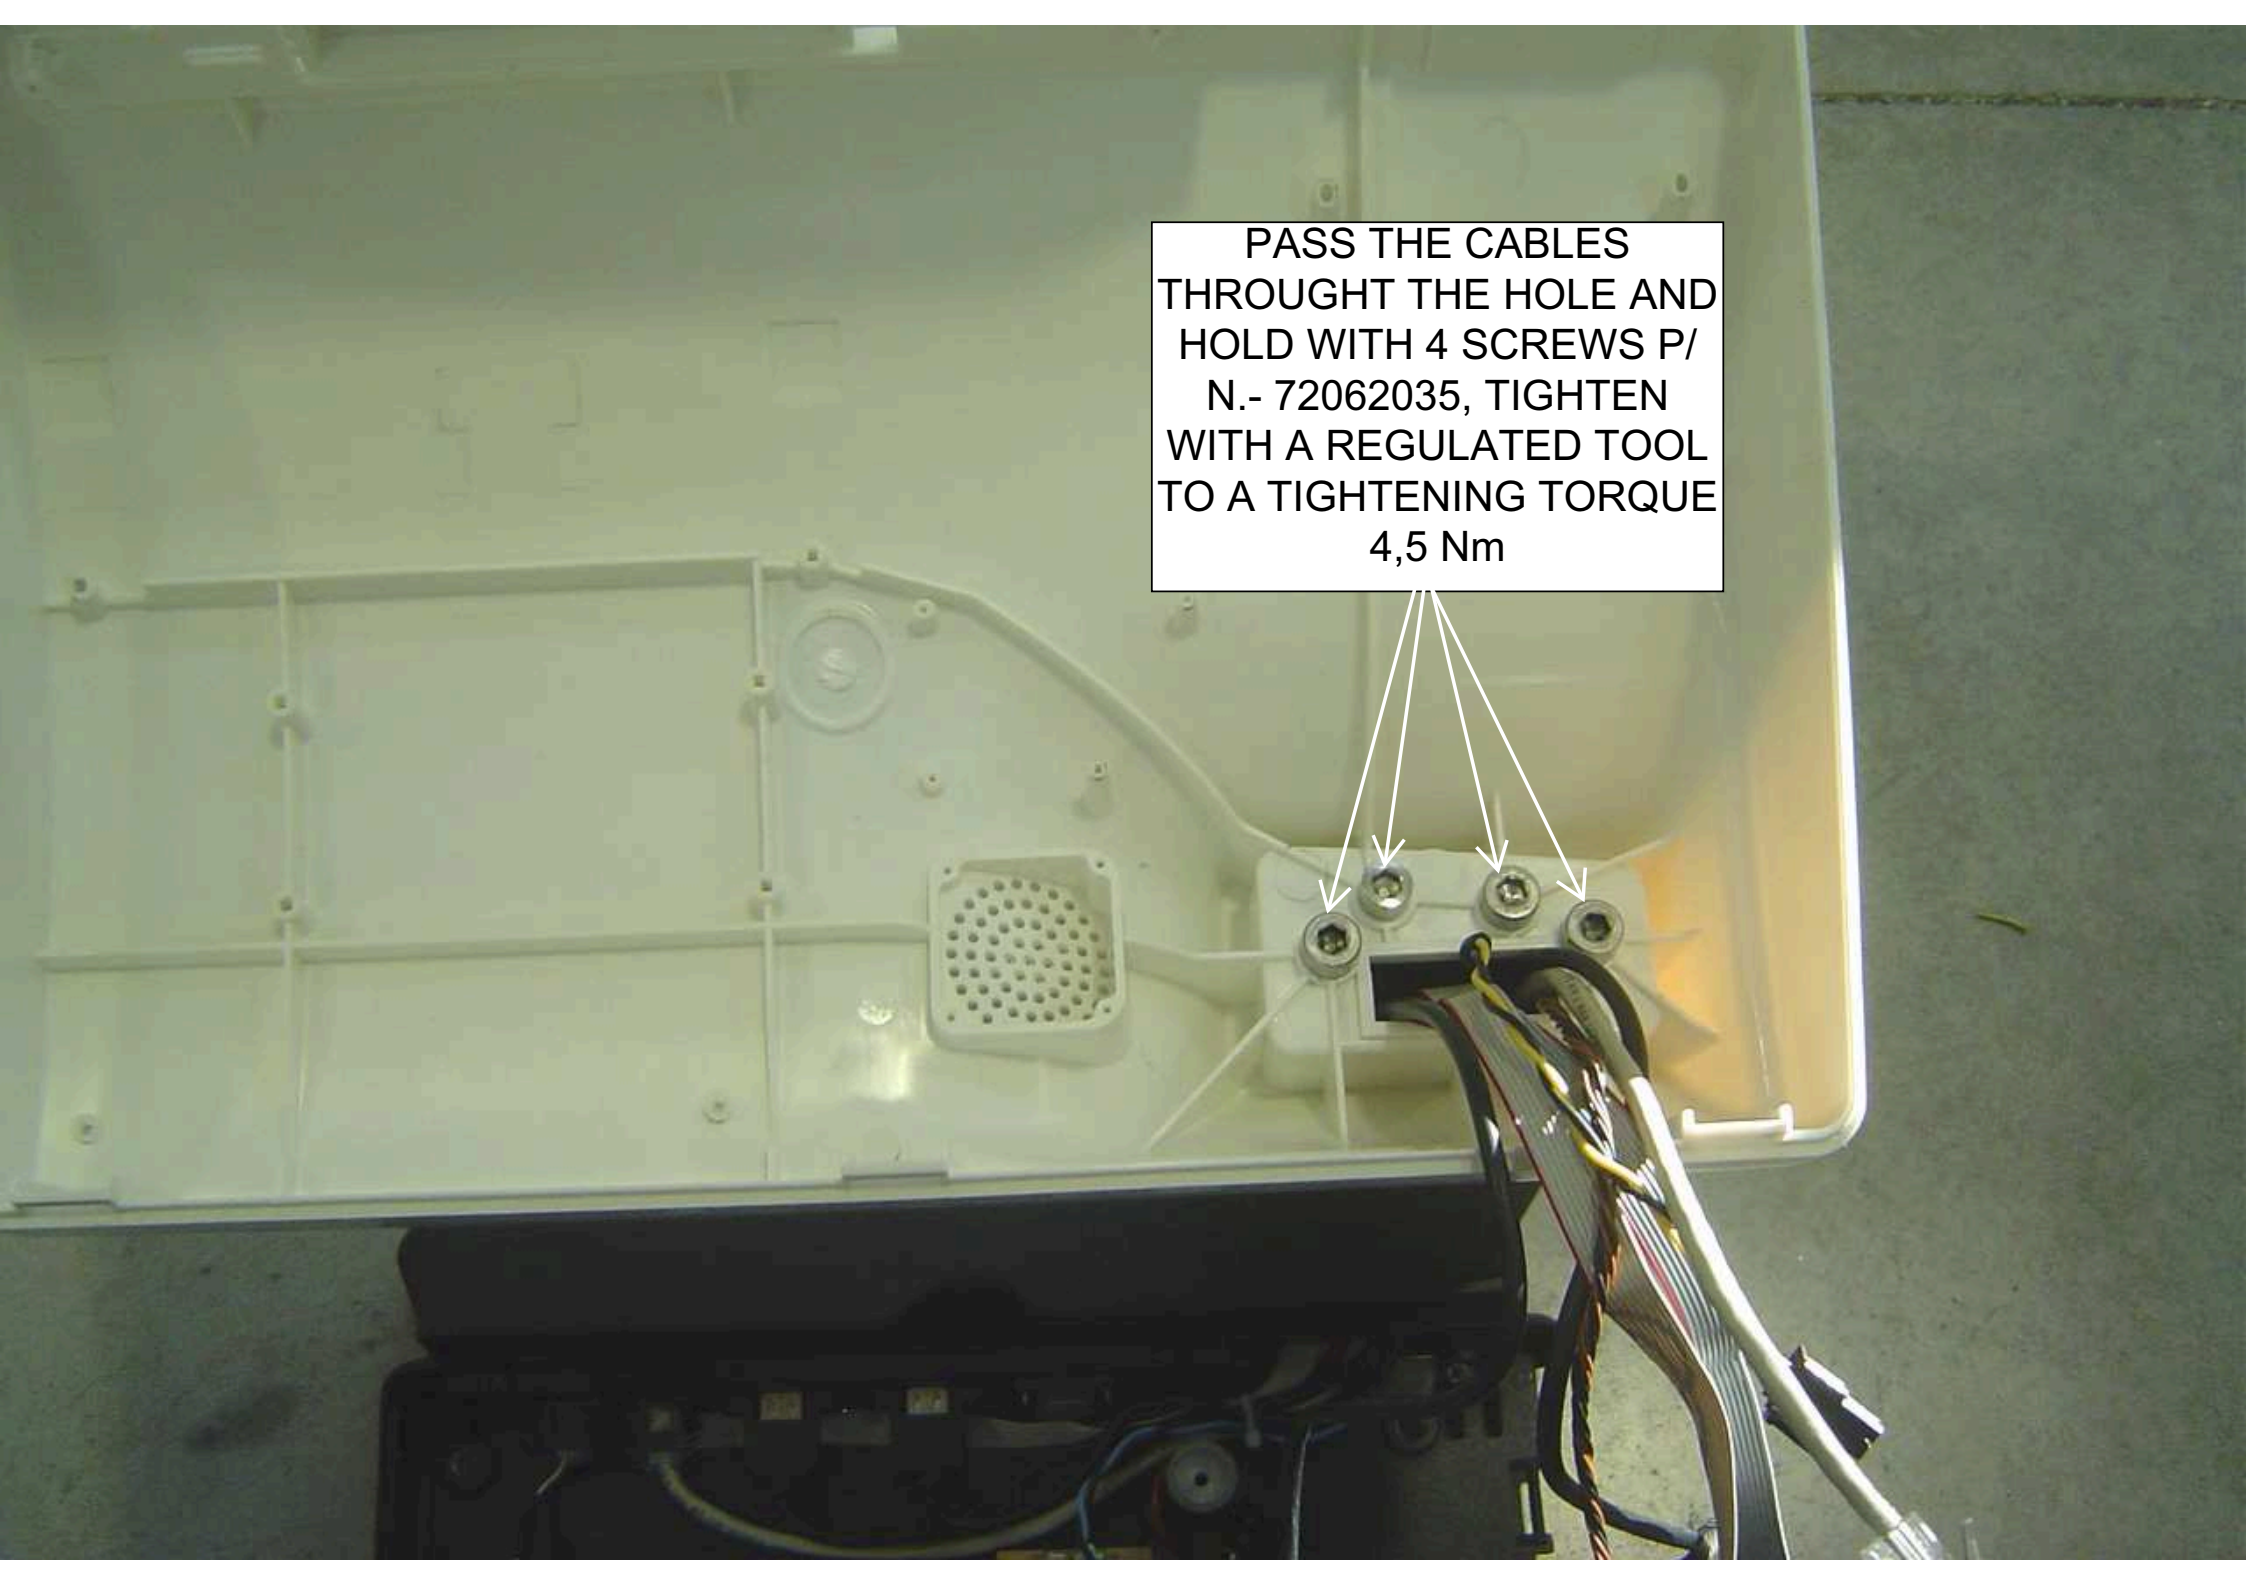


# 9.- ASSEMBLY FAN (COMPONENTS)


P/N.- 72056005  
(4)

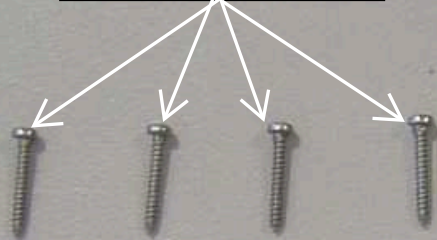

P/N.- 72200009  
(4)

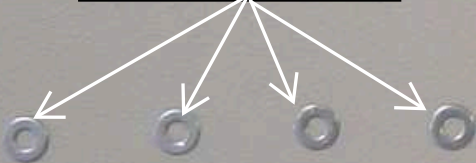


P/N.-  
99008080

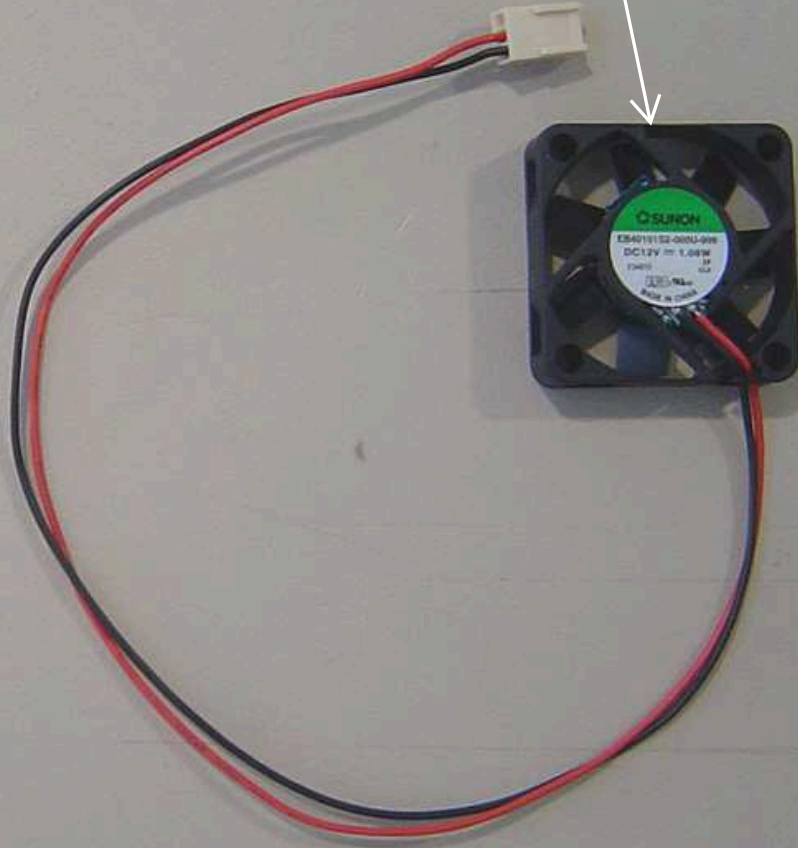

PUT THE FAN IN  
THIS POSITION FOR  
THE AIR TO GO  
ABROAD

HOLD THE FAN  
WITH 4 WHASERS  
P/N.- 72200009 AND  
4 SCREWS P/N.-  
72056005

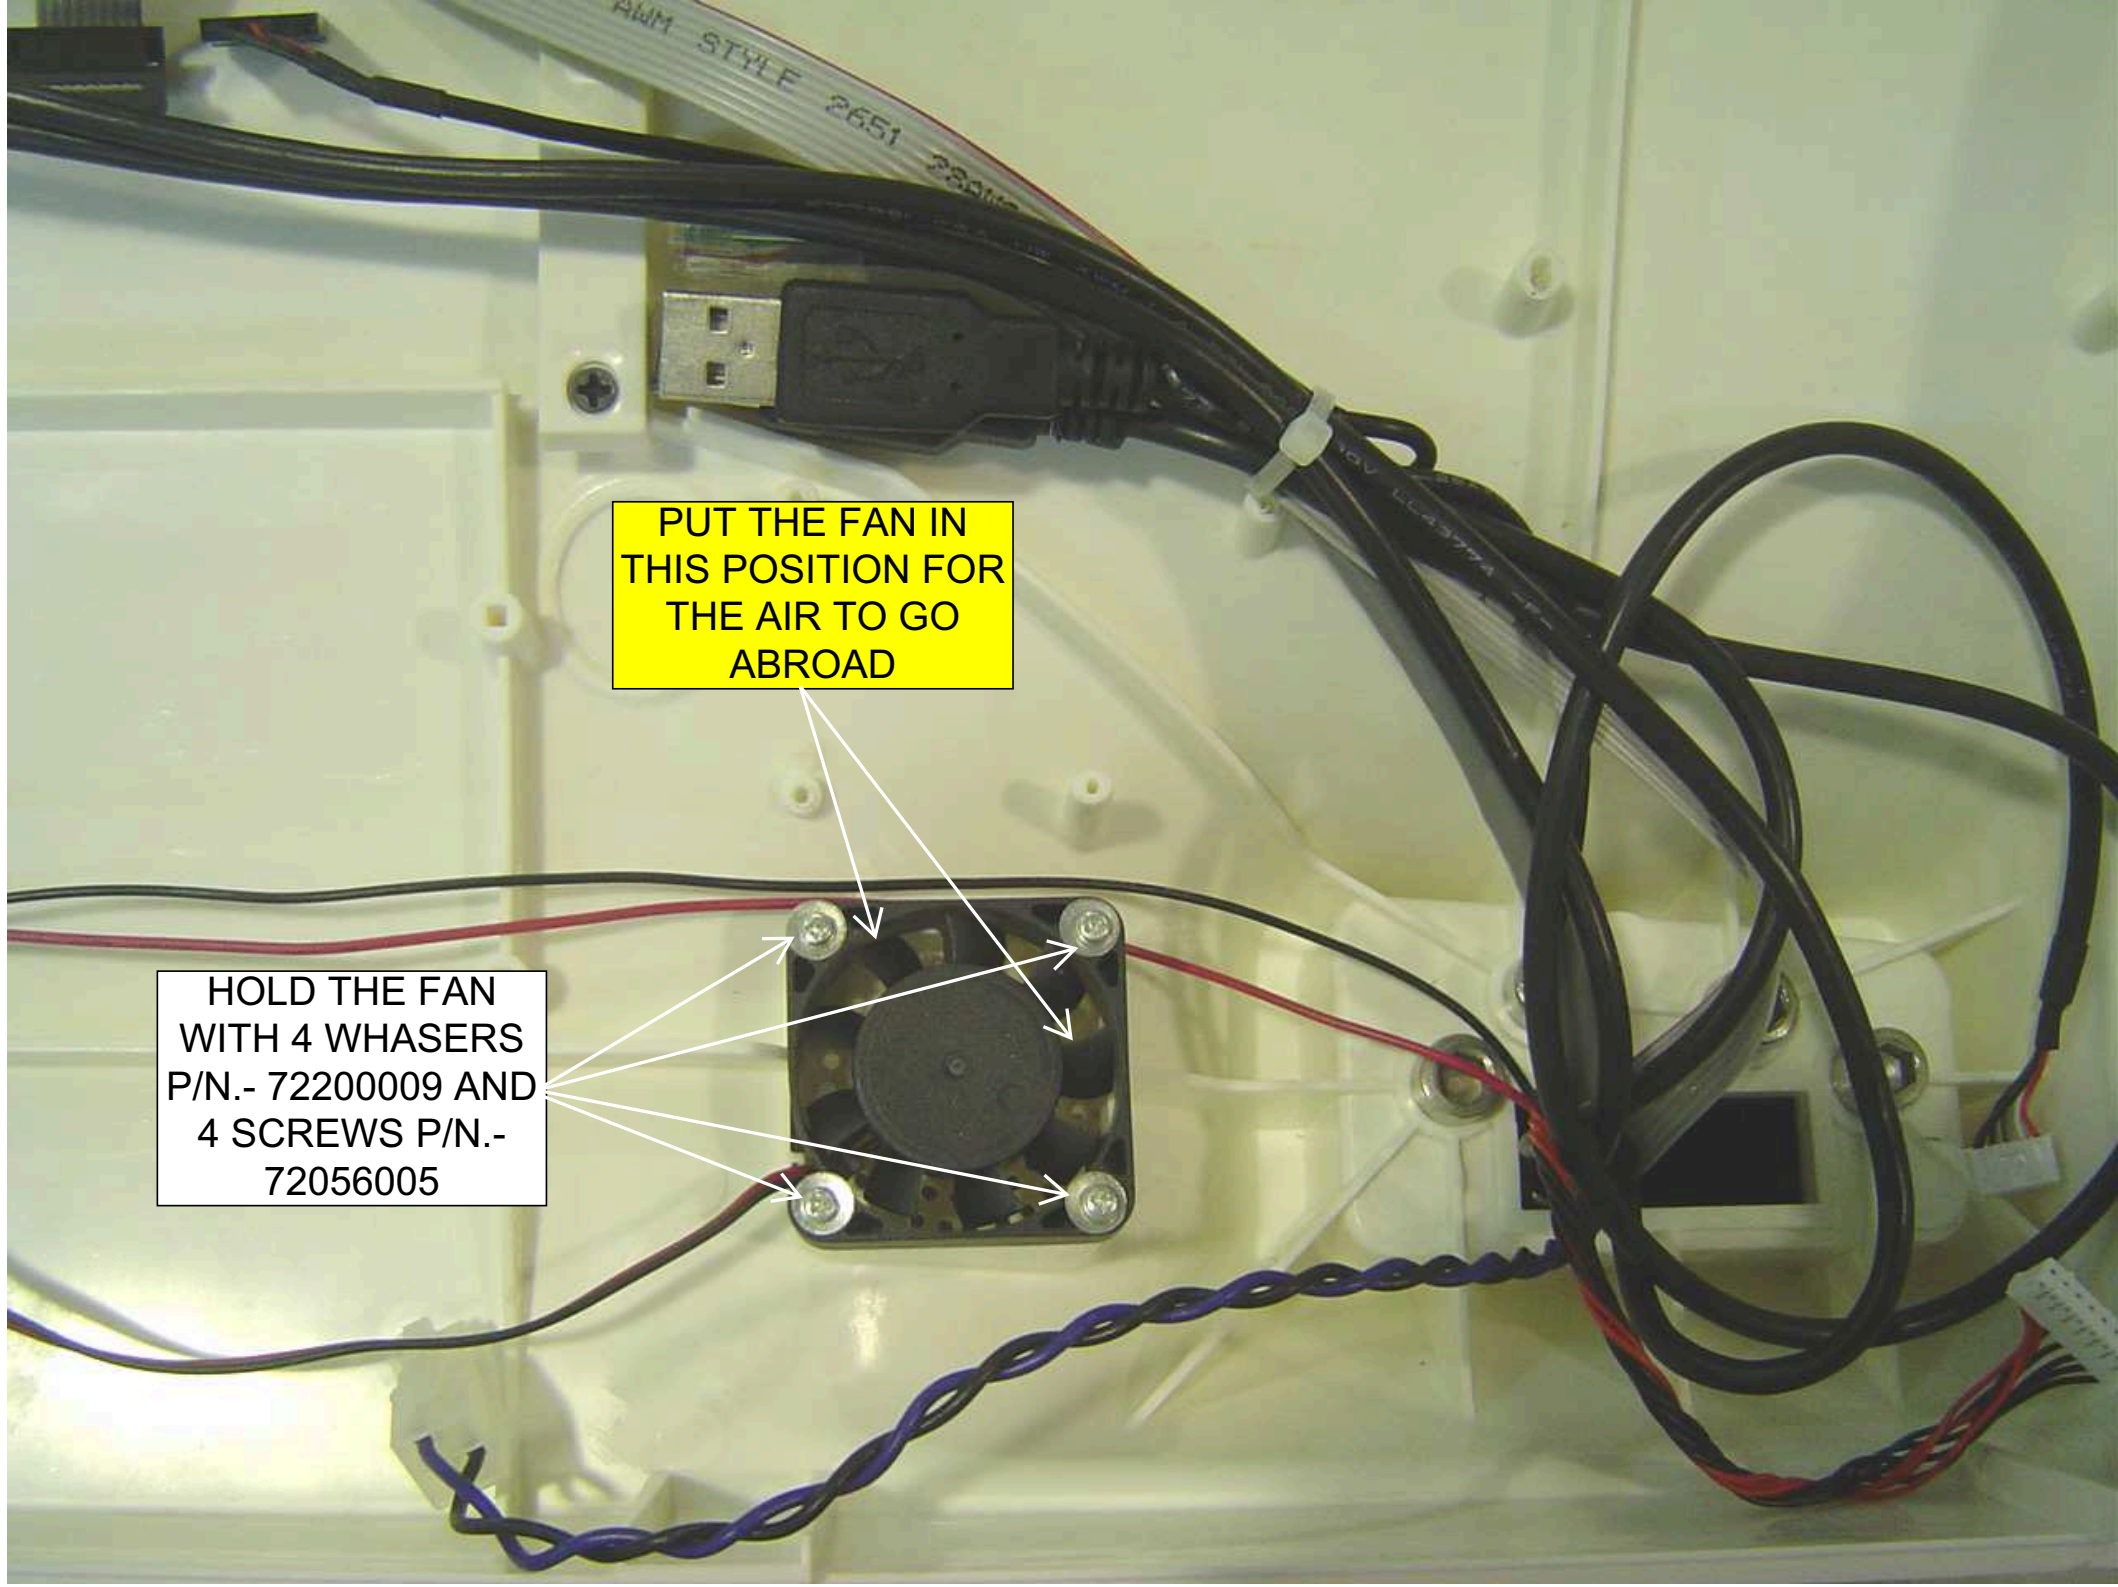


# 10.- ASSEMBLY PC BOARD (COMPONENTS )

P/N.-  
91008063



P/N.- 19016710

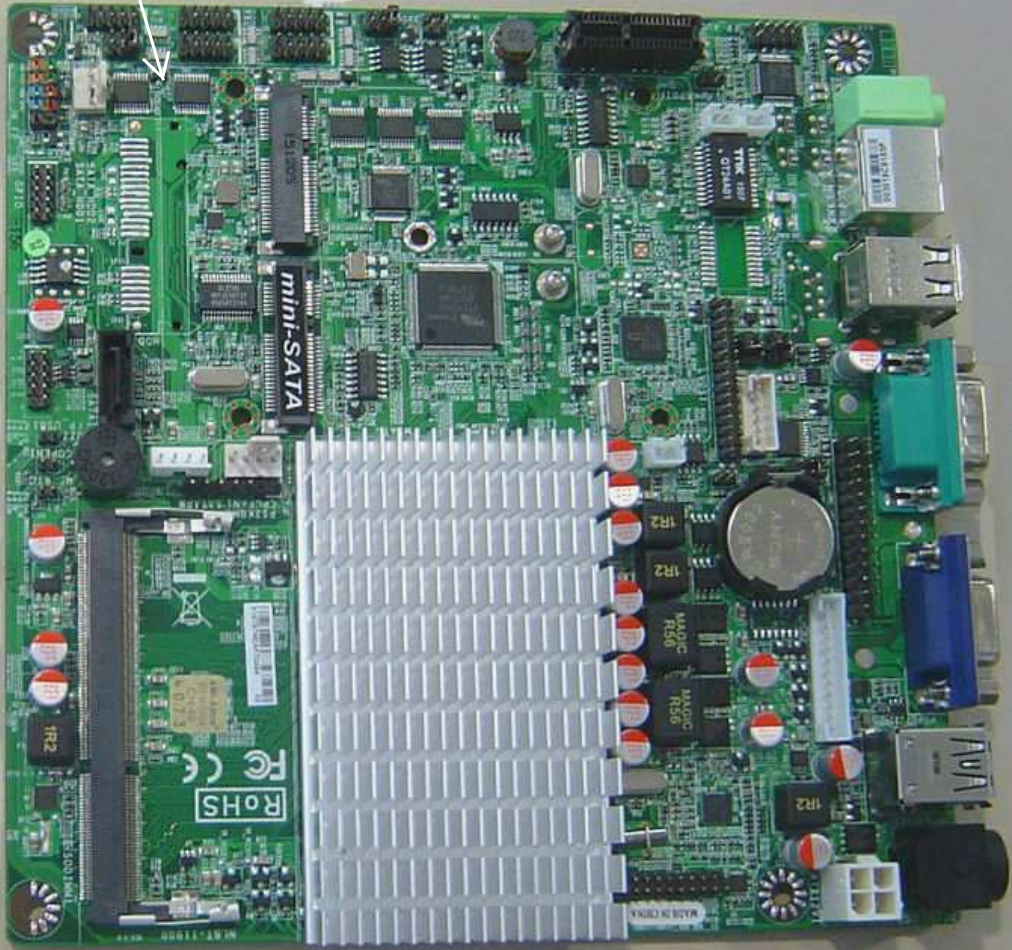

P/N.-  
73050004  
(4)



P/N.-  
72056007 (2)




P/N.- 72056006  
(2)



P/N.- 72059007  
(2)




P/N.-  
71004462 (2)






HOLD PIECES SUPPORT  
PC BOARD P/N.-  
71004462 WITH THE  
SCREWS P/N.- 72059007

P/N.-  
90113983

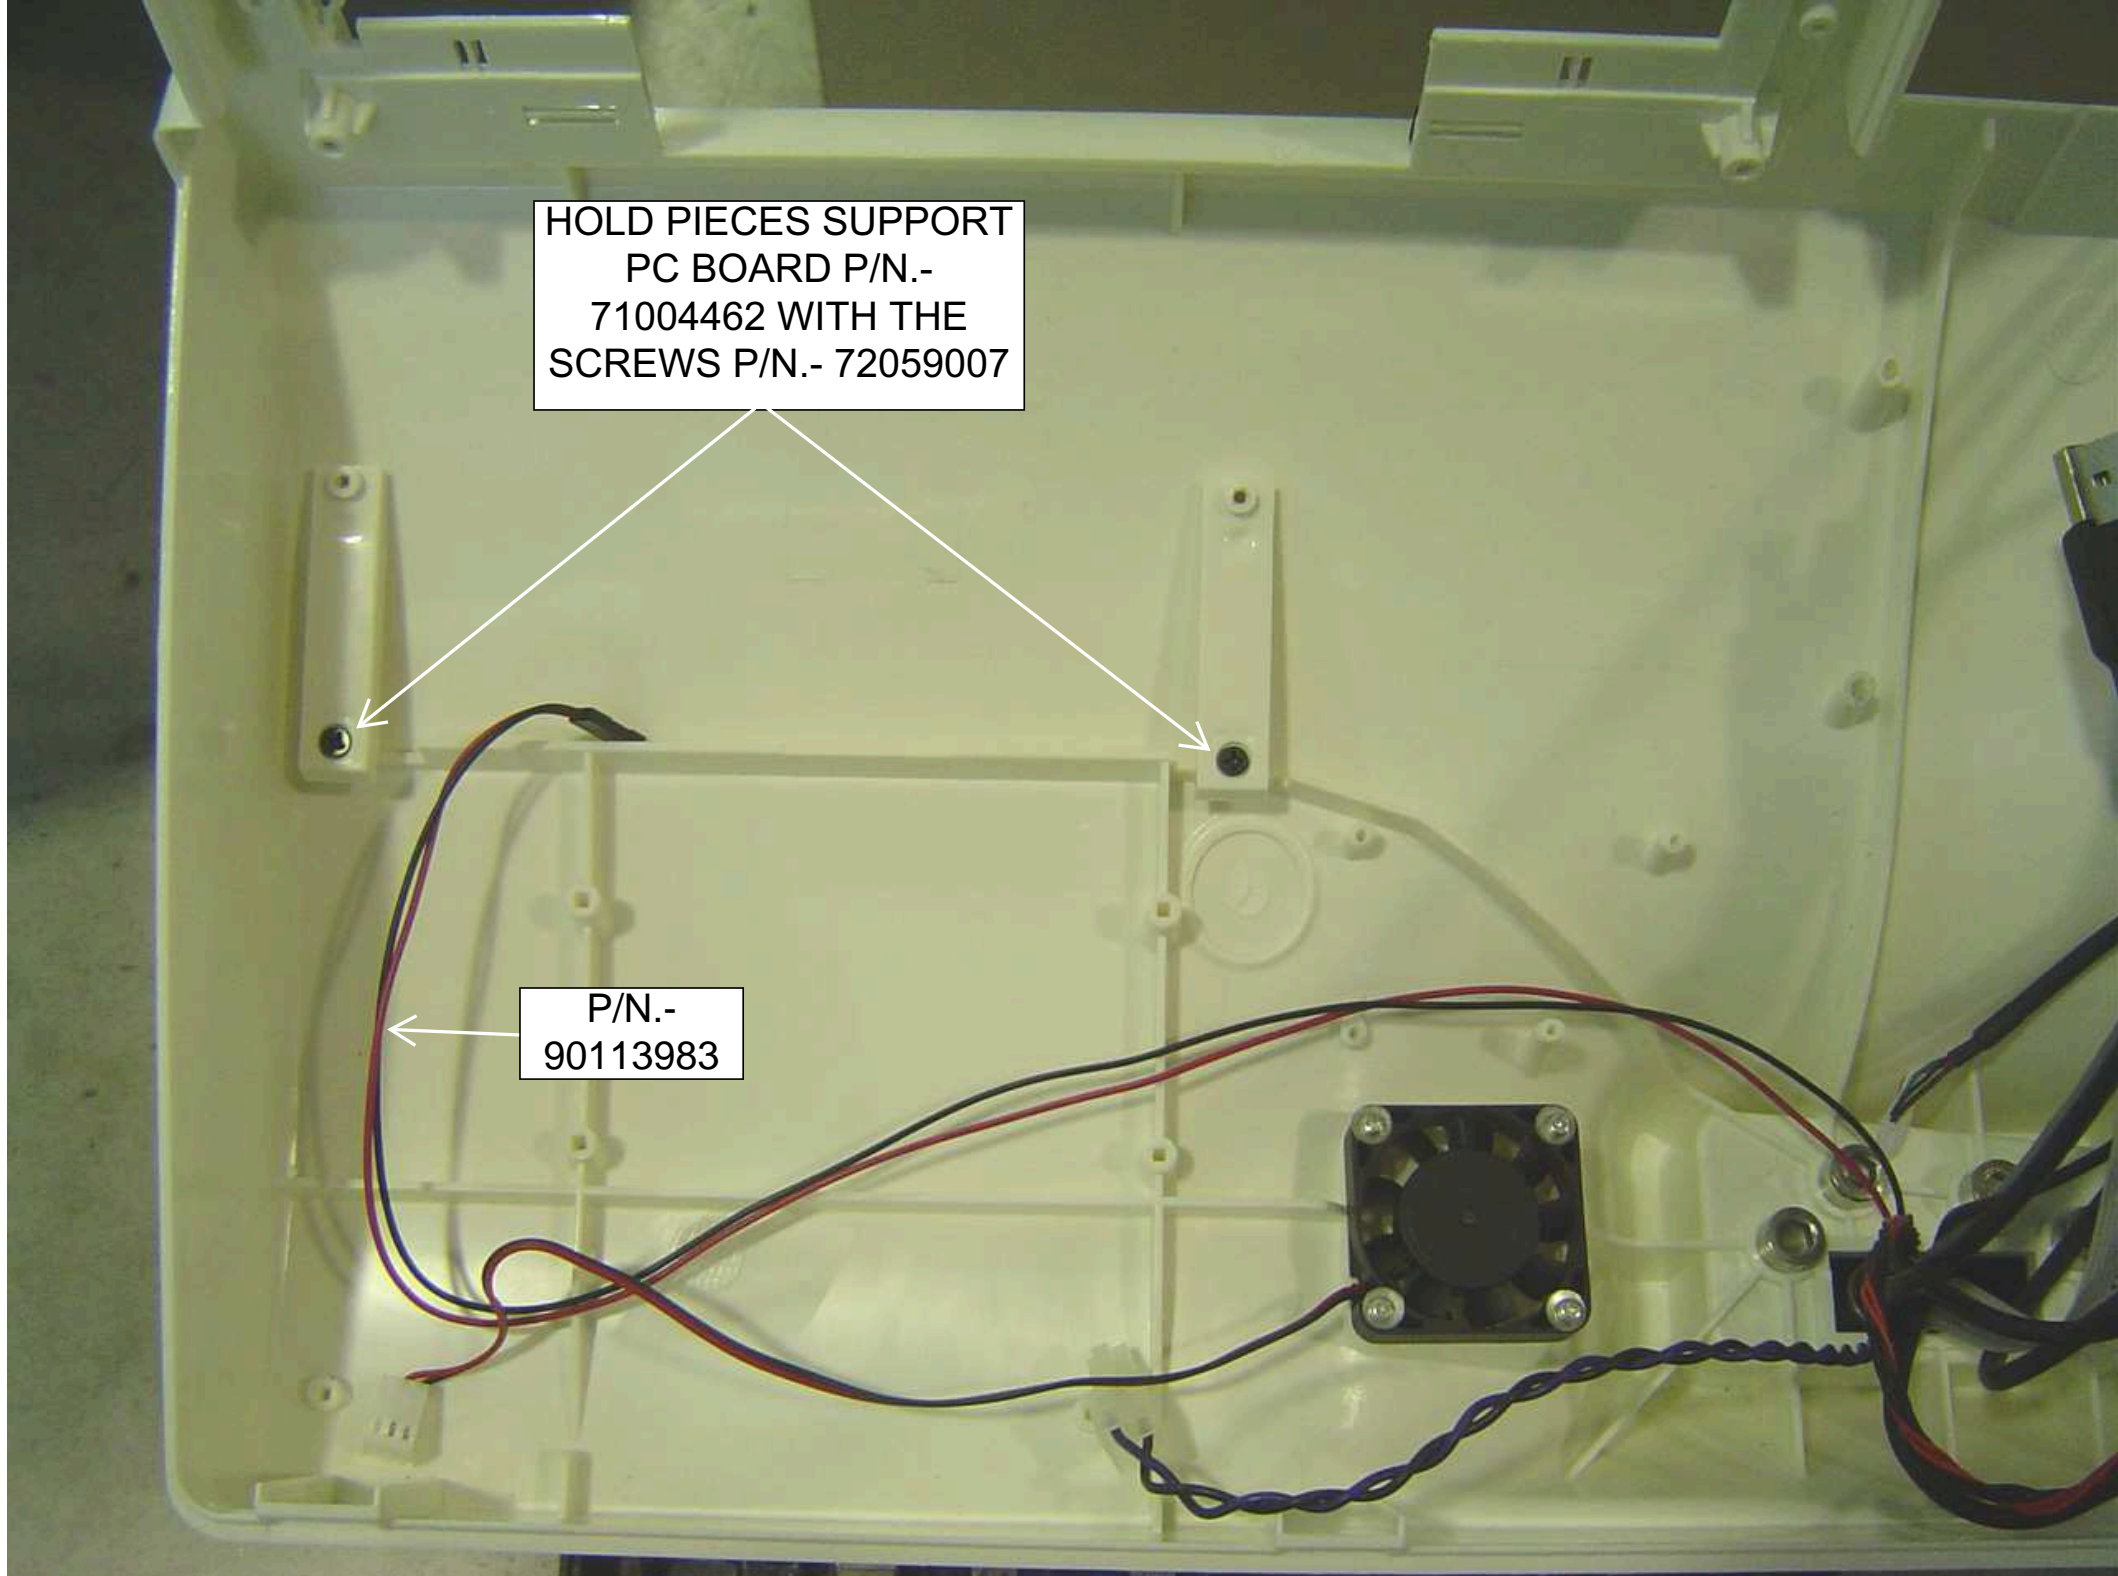


VERIFY THE  
JUMPER ARE  
WELL DONE



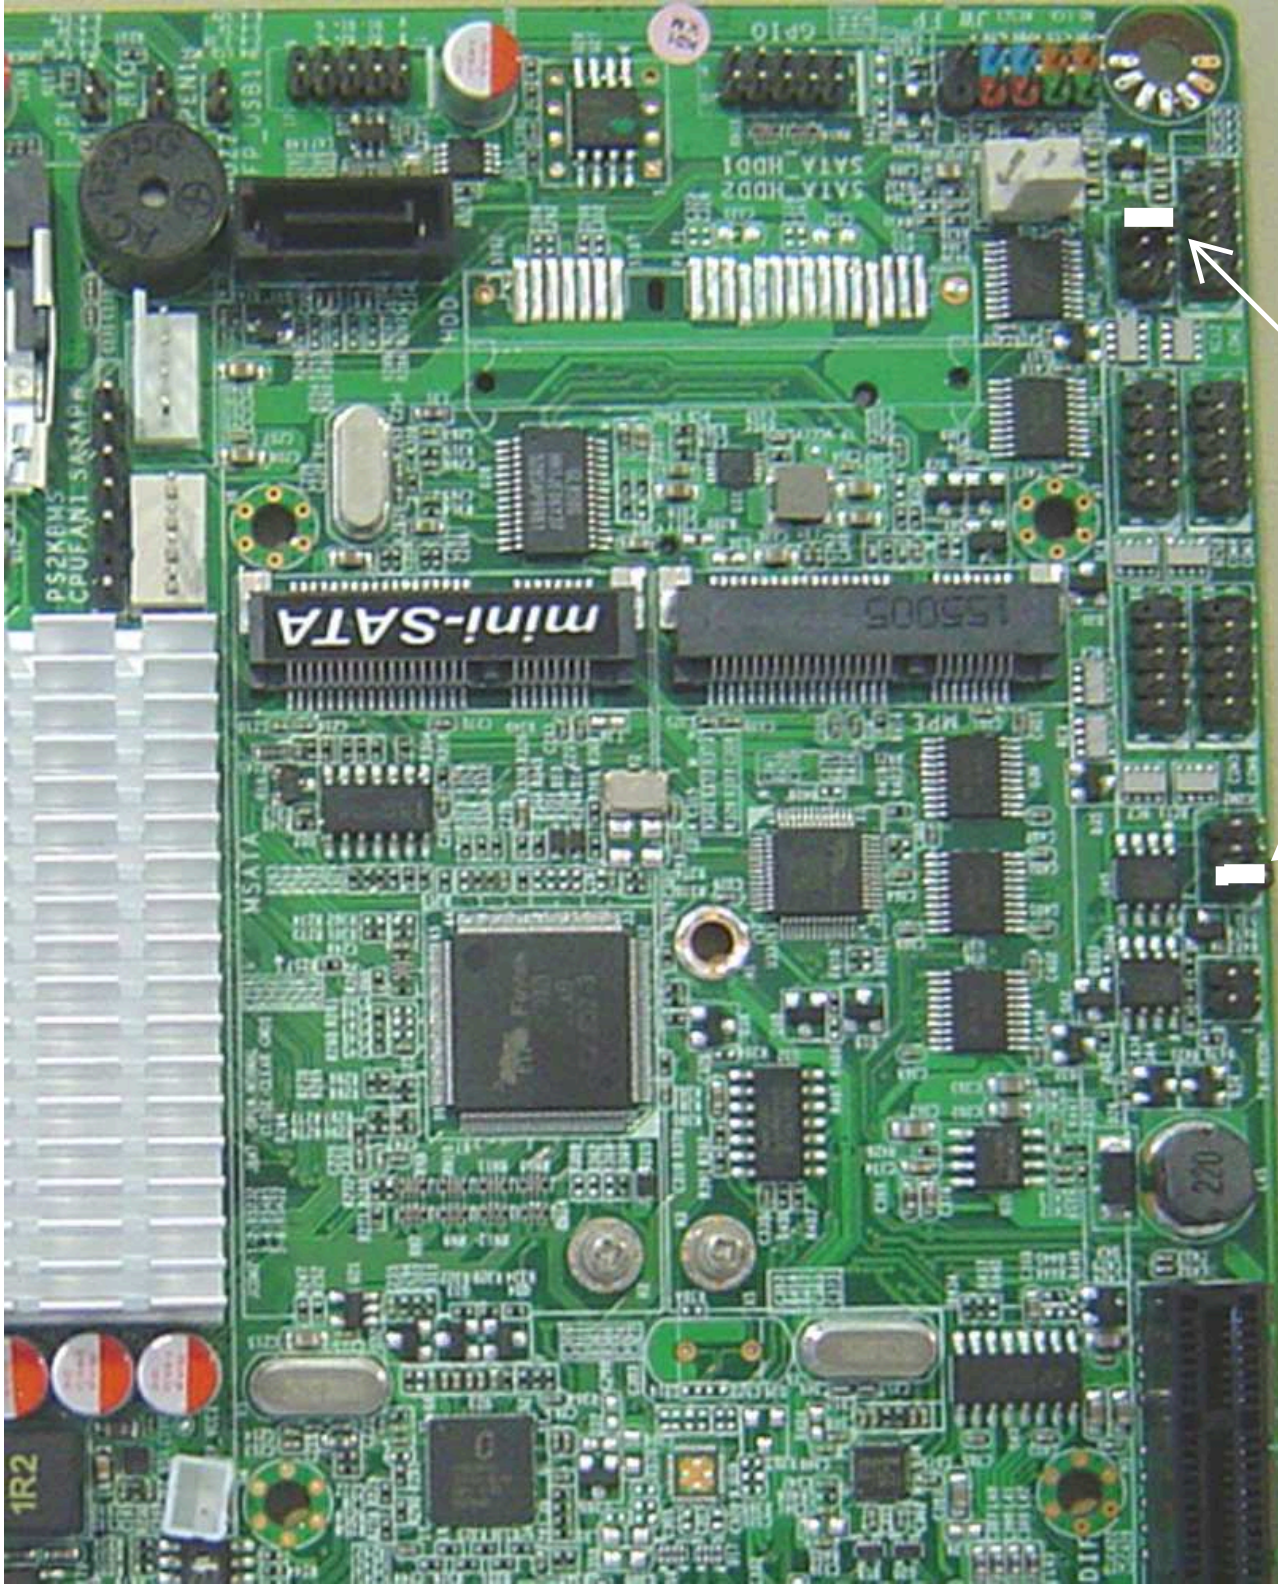


VERIFY THE  
JUMPER  
ARE WELL  
DONE

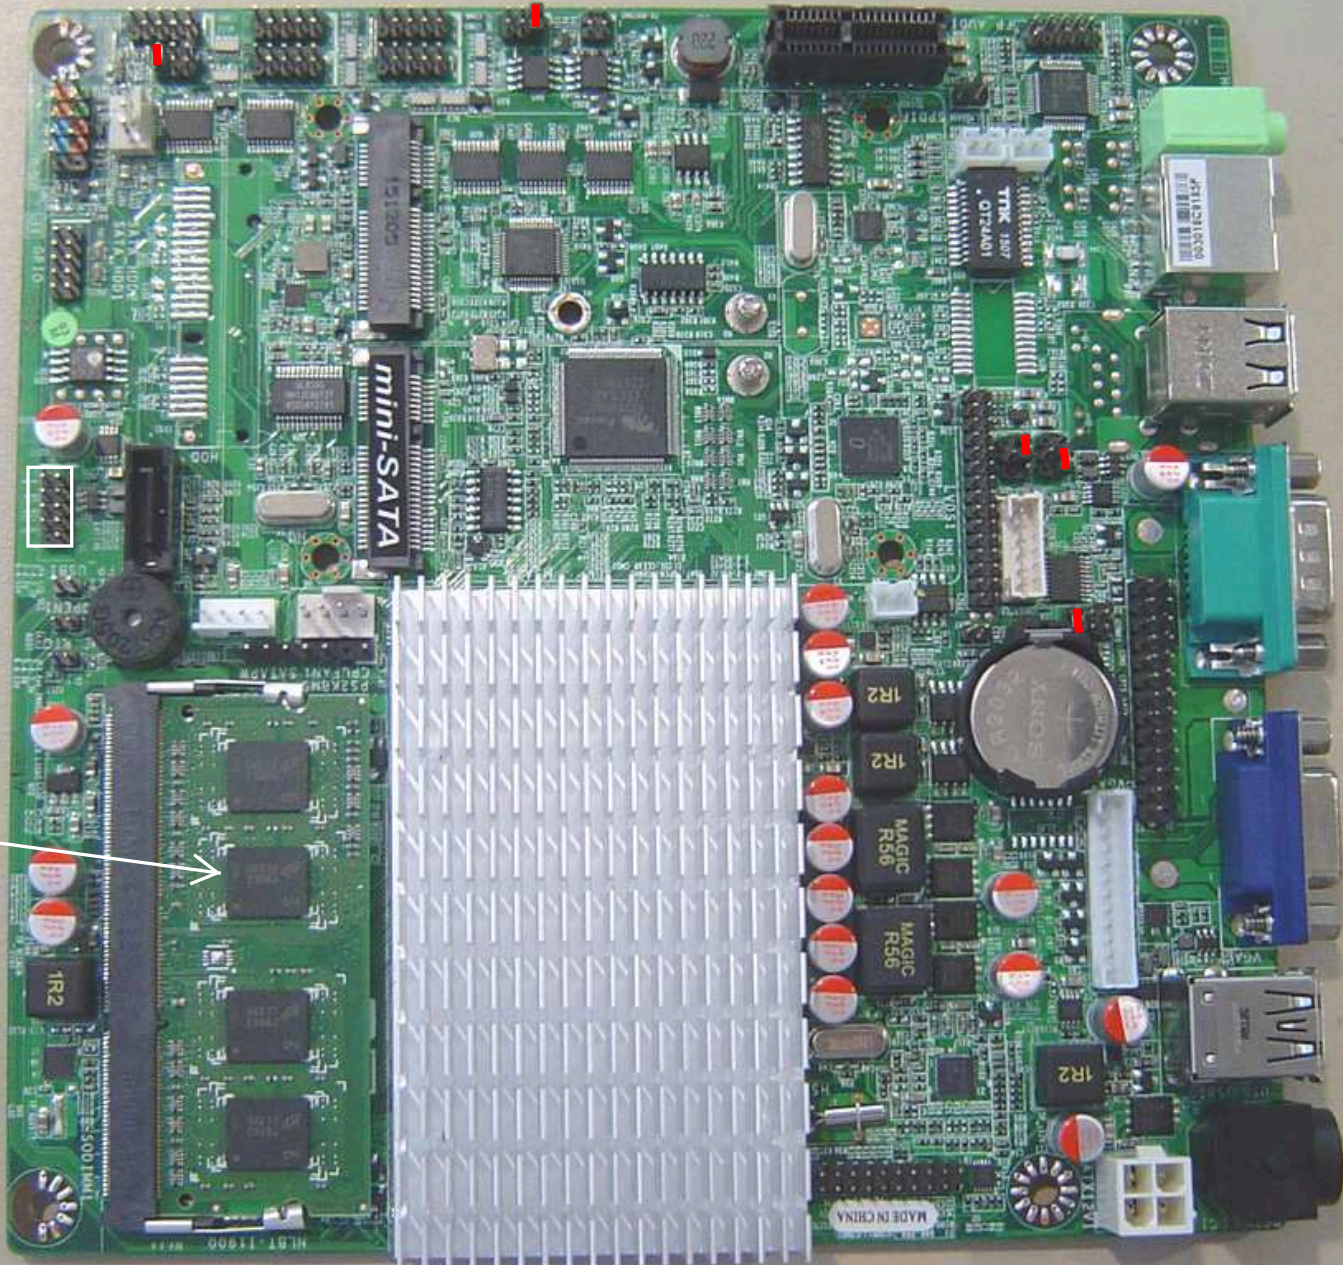

CONNECT  
DE LA RAM  
P/N.-  
91008063



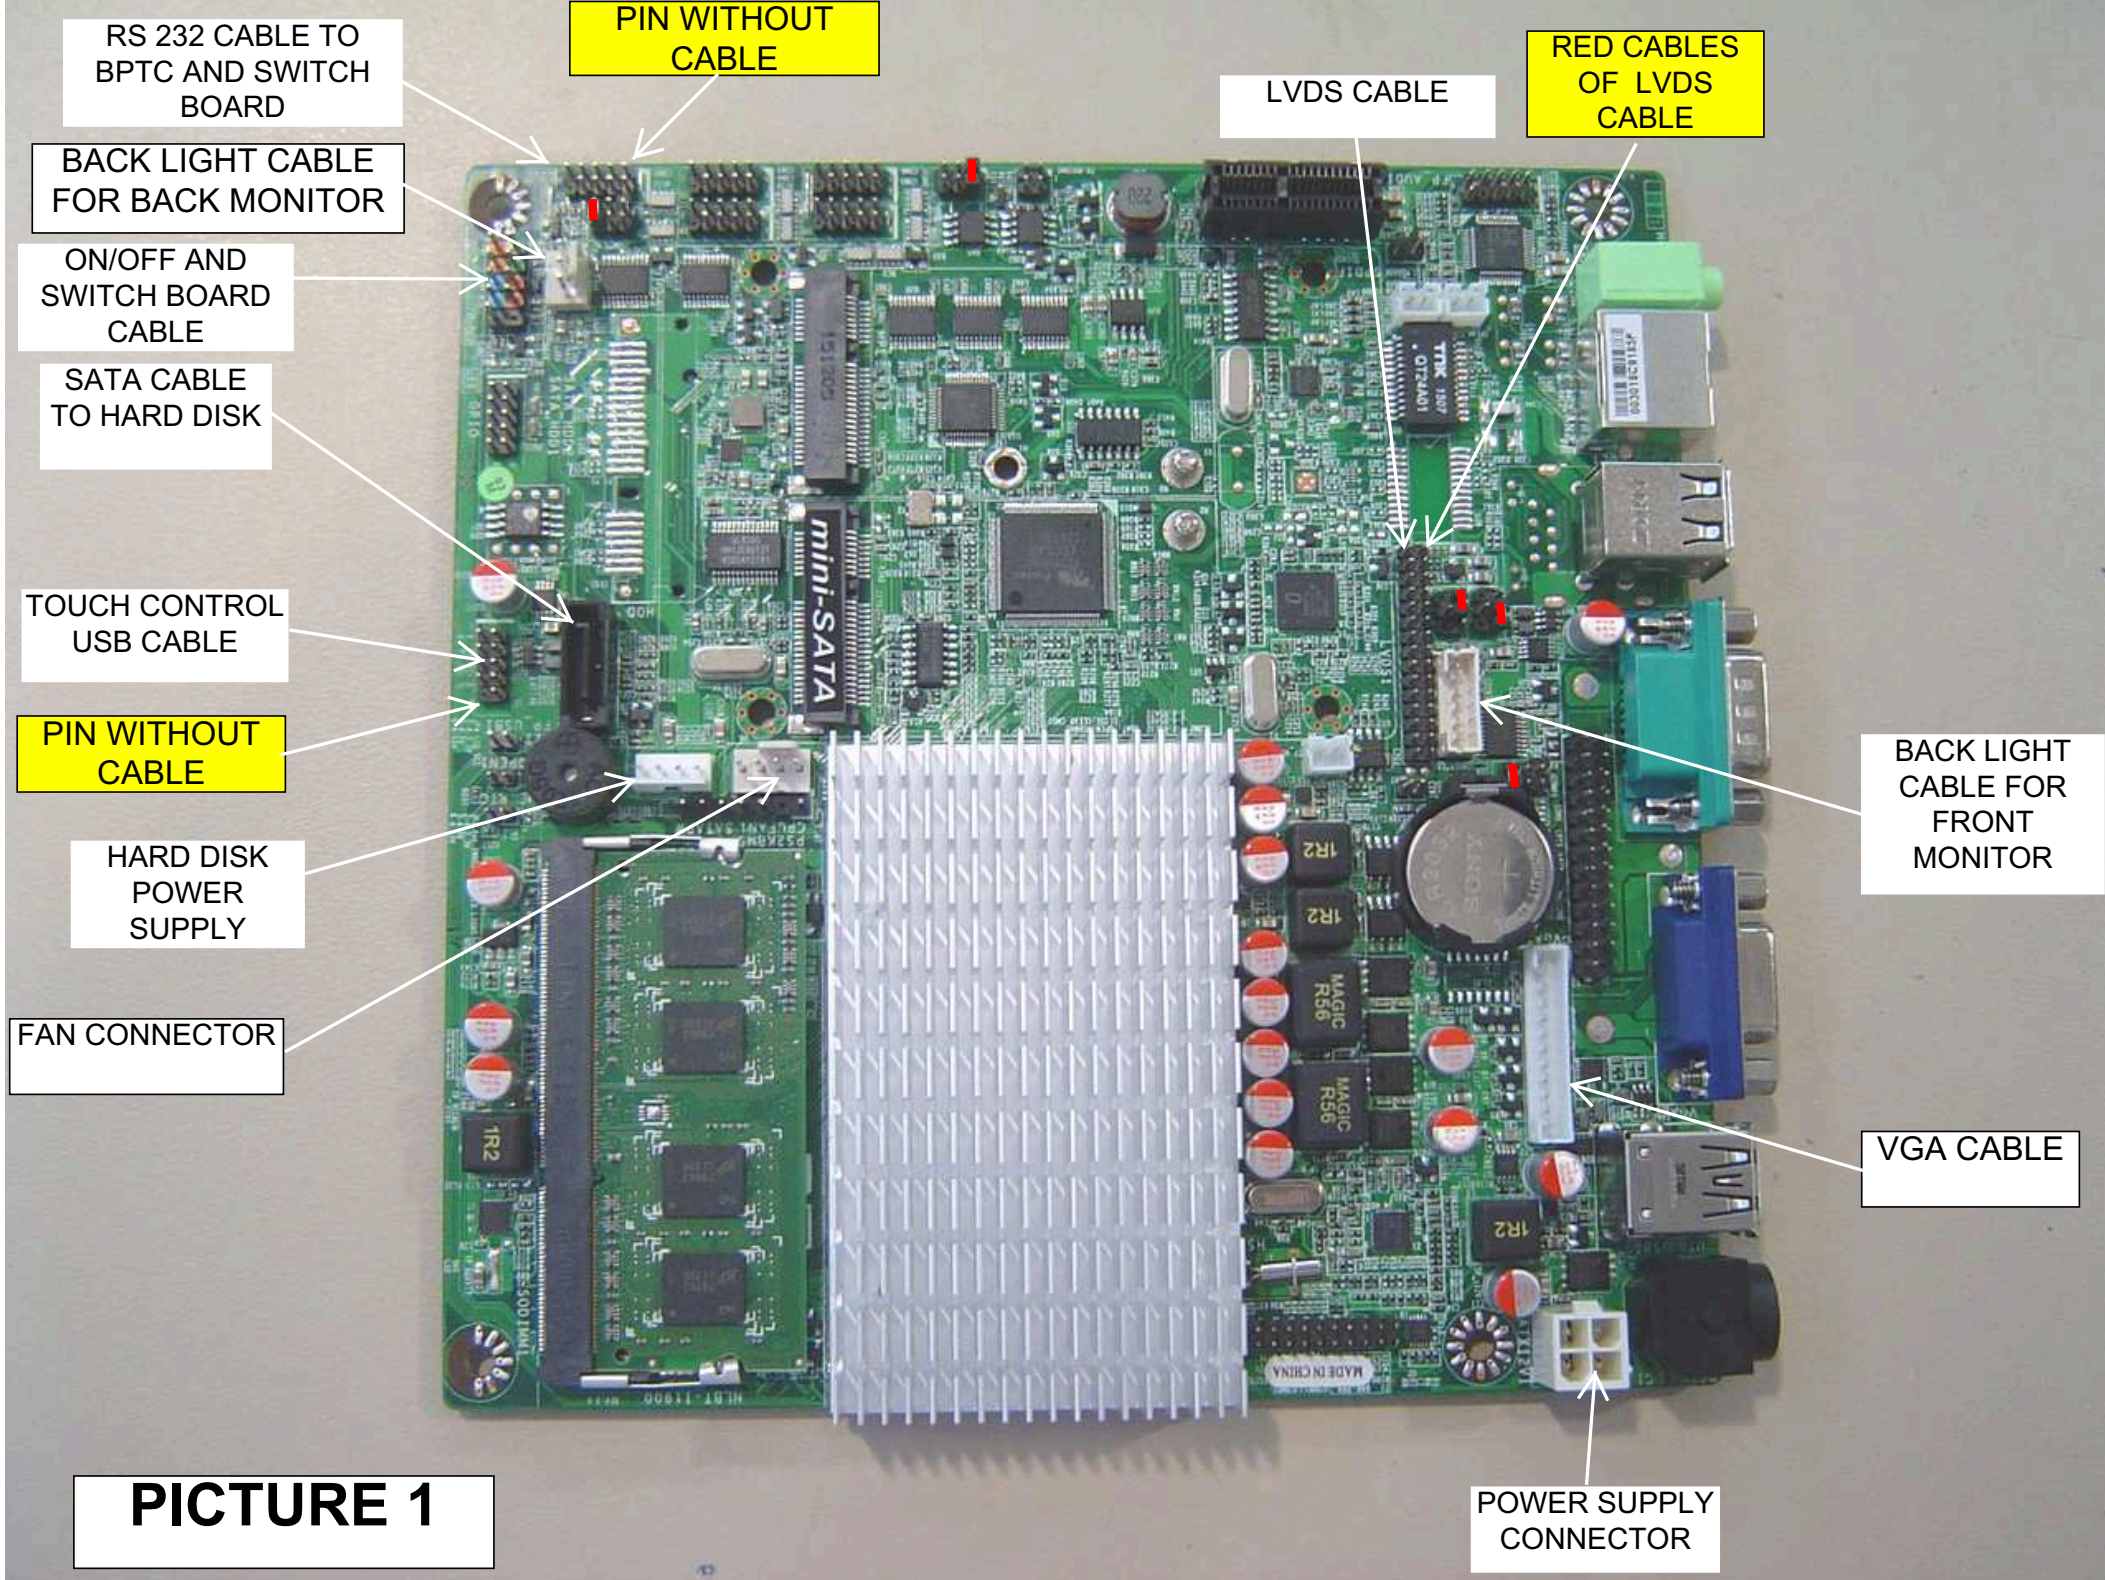

**PICTURE 1**

**PICTURE 2**



USB CABLE  
FOR  
TOUCH

CONECTOR  
EXTERNAL RS  
232

USB FOR  
PRINTER

CONECTOR  
ETHERNET


HOLD AND CONNECTION OF CABLES IN MOTHER BOARD (SEE NEXT PICTURES )

HOLD MOTHER BOARD AND TERMINAL GROUND OF CABLE P/N.- 90114080 WITH WHASER P/N.- 73050004 AND SCREW P/N.- 72056007

HOLD THE CABLES WITH FLANGES

PASTE THE STICKES P/N.- 70000456

HOLD PC BOARD WITH 2 WHASER P/N.- 73050004 AND 2 SCREWS P/N.- 72056006

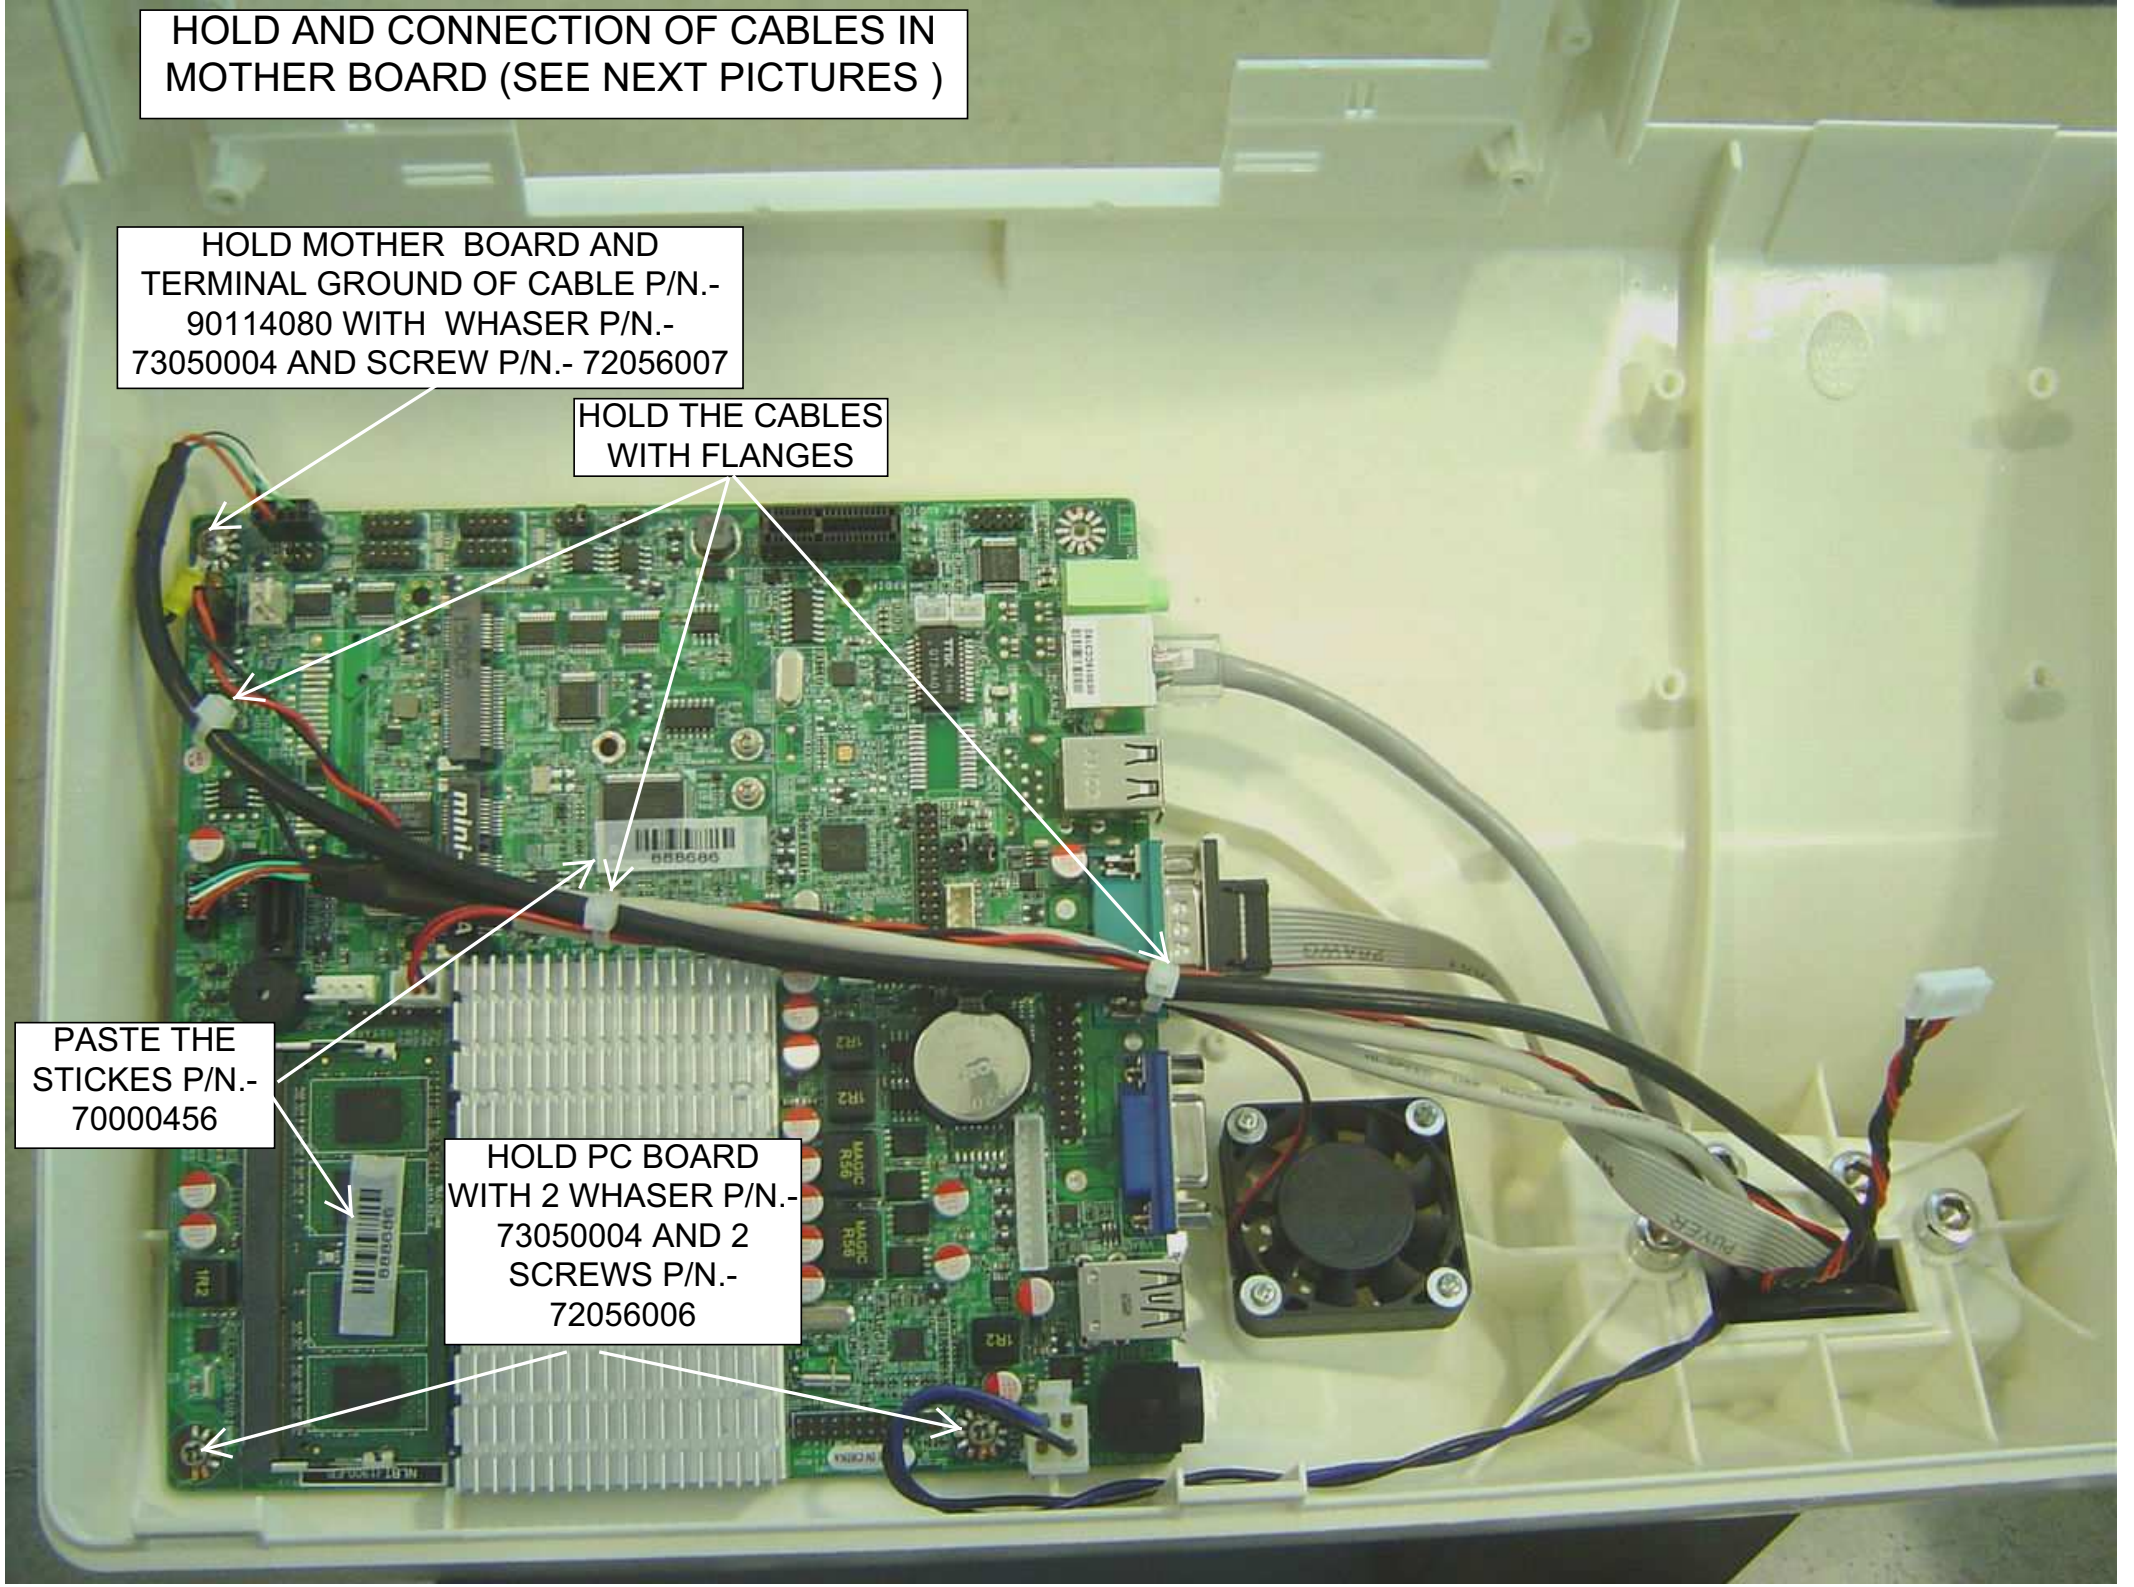


CONNECT CABLE P/N.- 90114081  
AND ATTACH CABLE TO  
PREVENT DISCONNECT WITH  
HOT MELTS ADHESIVE

CONNECT CABLE  
P/N.- 90113983 IN  
RED PINES

CONNECT CABLE P/N.-  
90114080 AND ATTACH  
CABLE TO PREVENT  
DISCONNECT WITH HOT  
MELTS ADHESIVE

CONNECT FAN  
CABLE

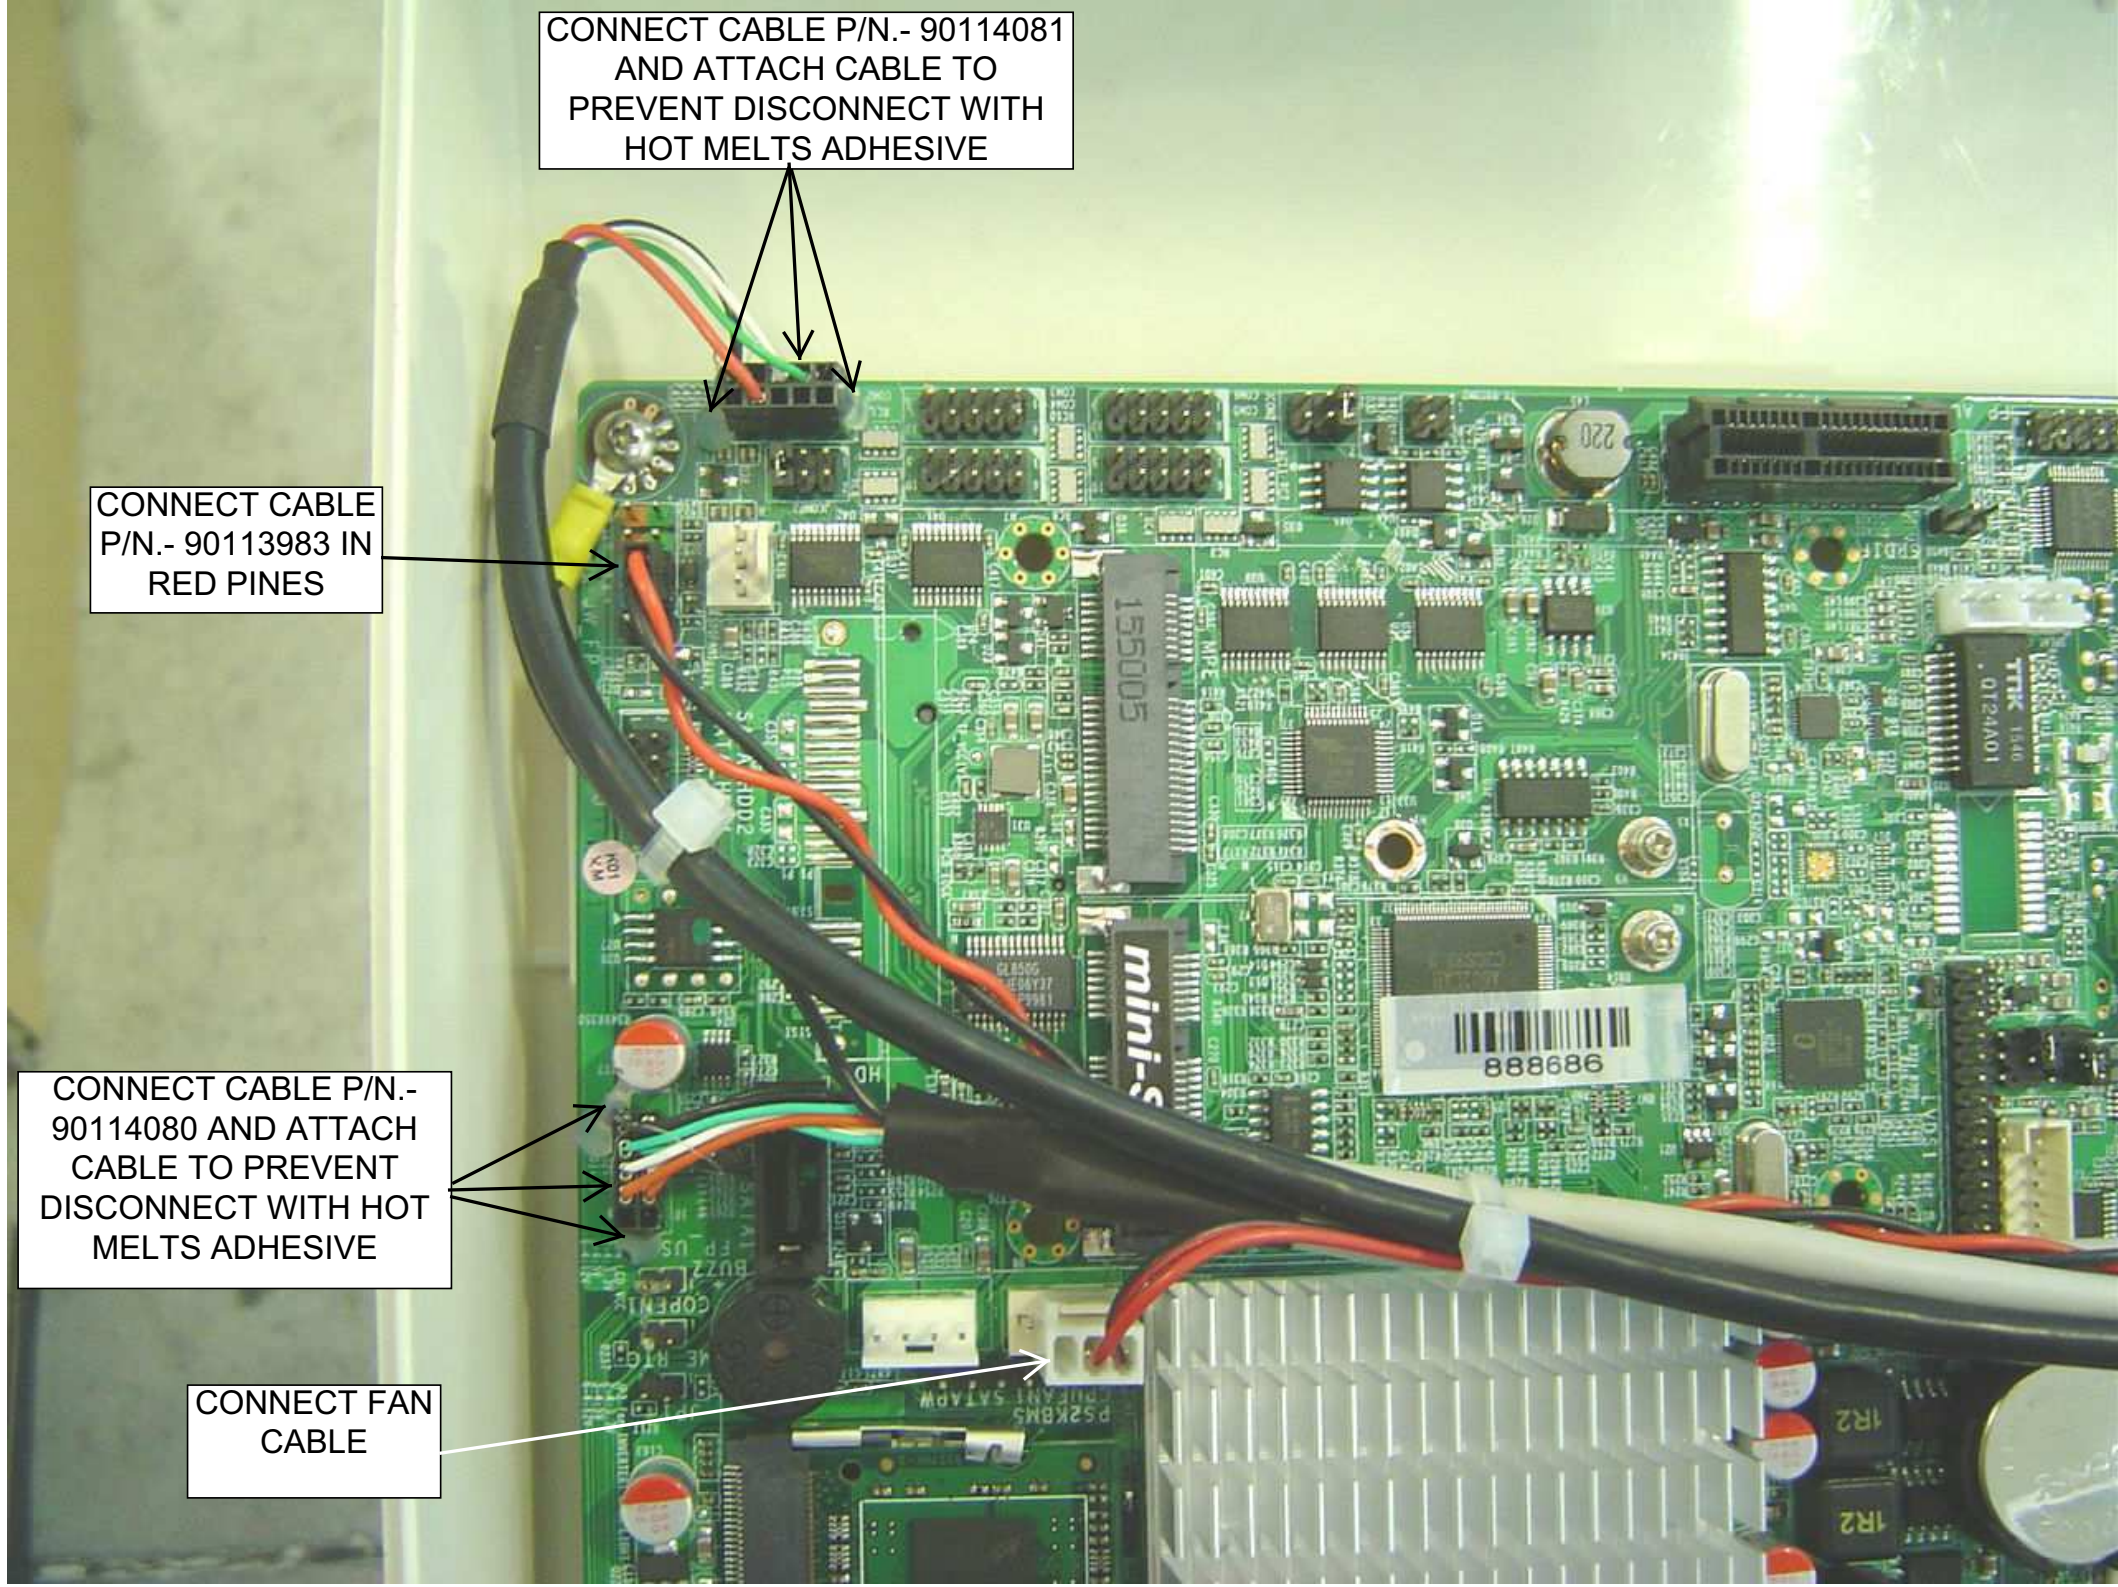




CONNECT CABLE  
P/N.- 90113987

CONNECT CABLE  
P/N.- 90113909


CABLE P/N.-  
90113951

CONNECT THE  
CABLE P/N.-  
90113950

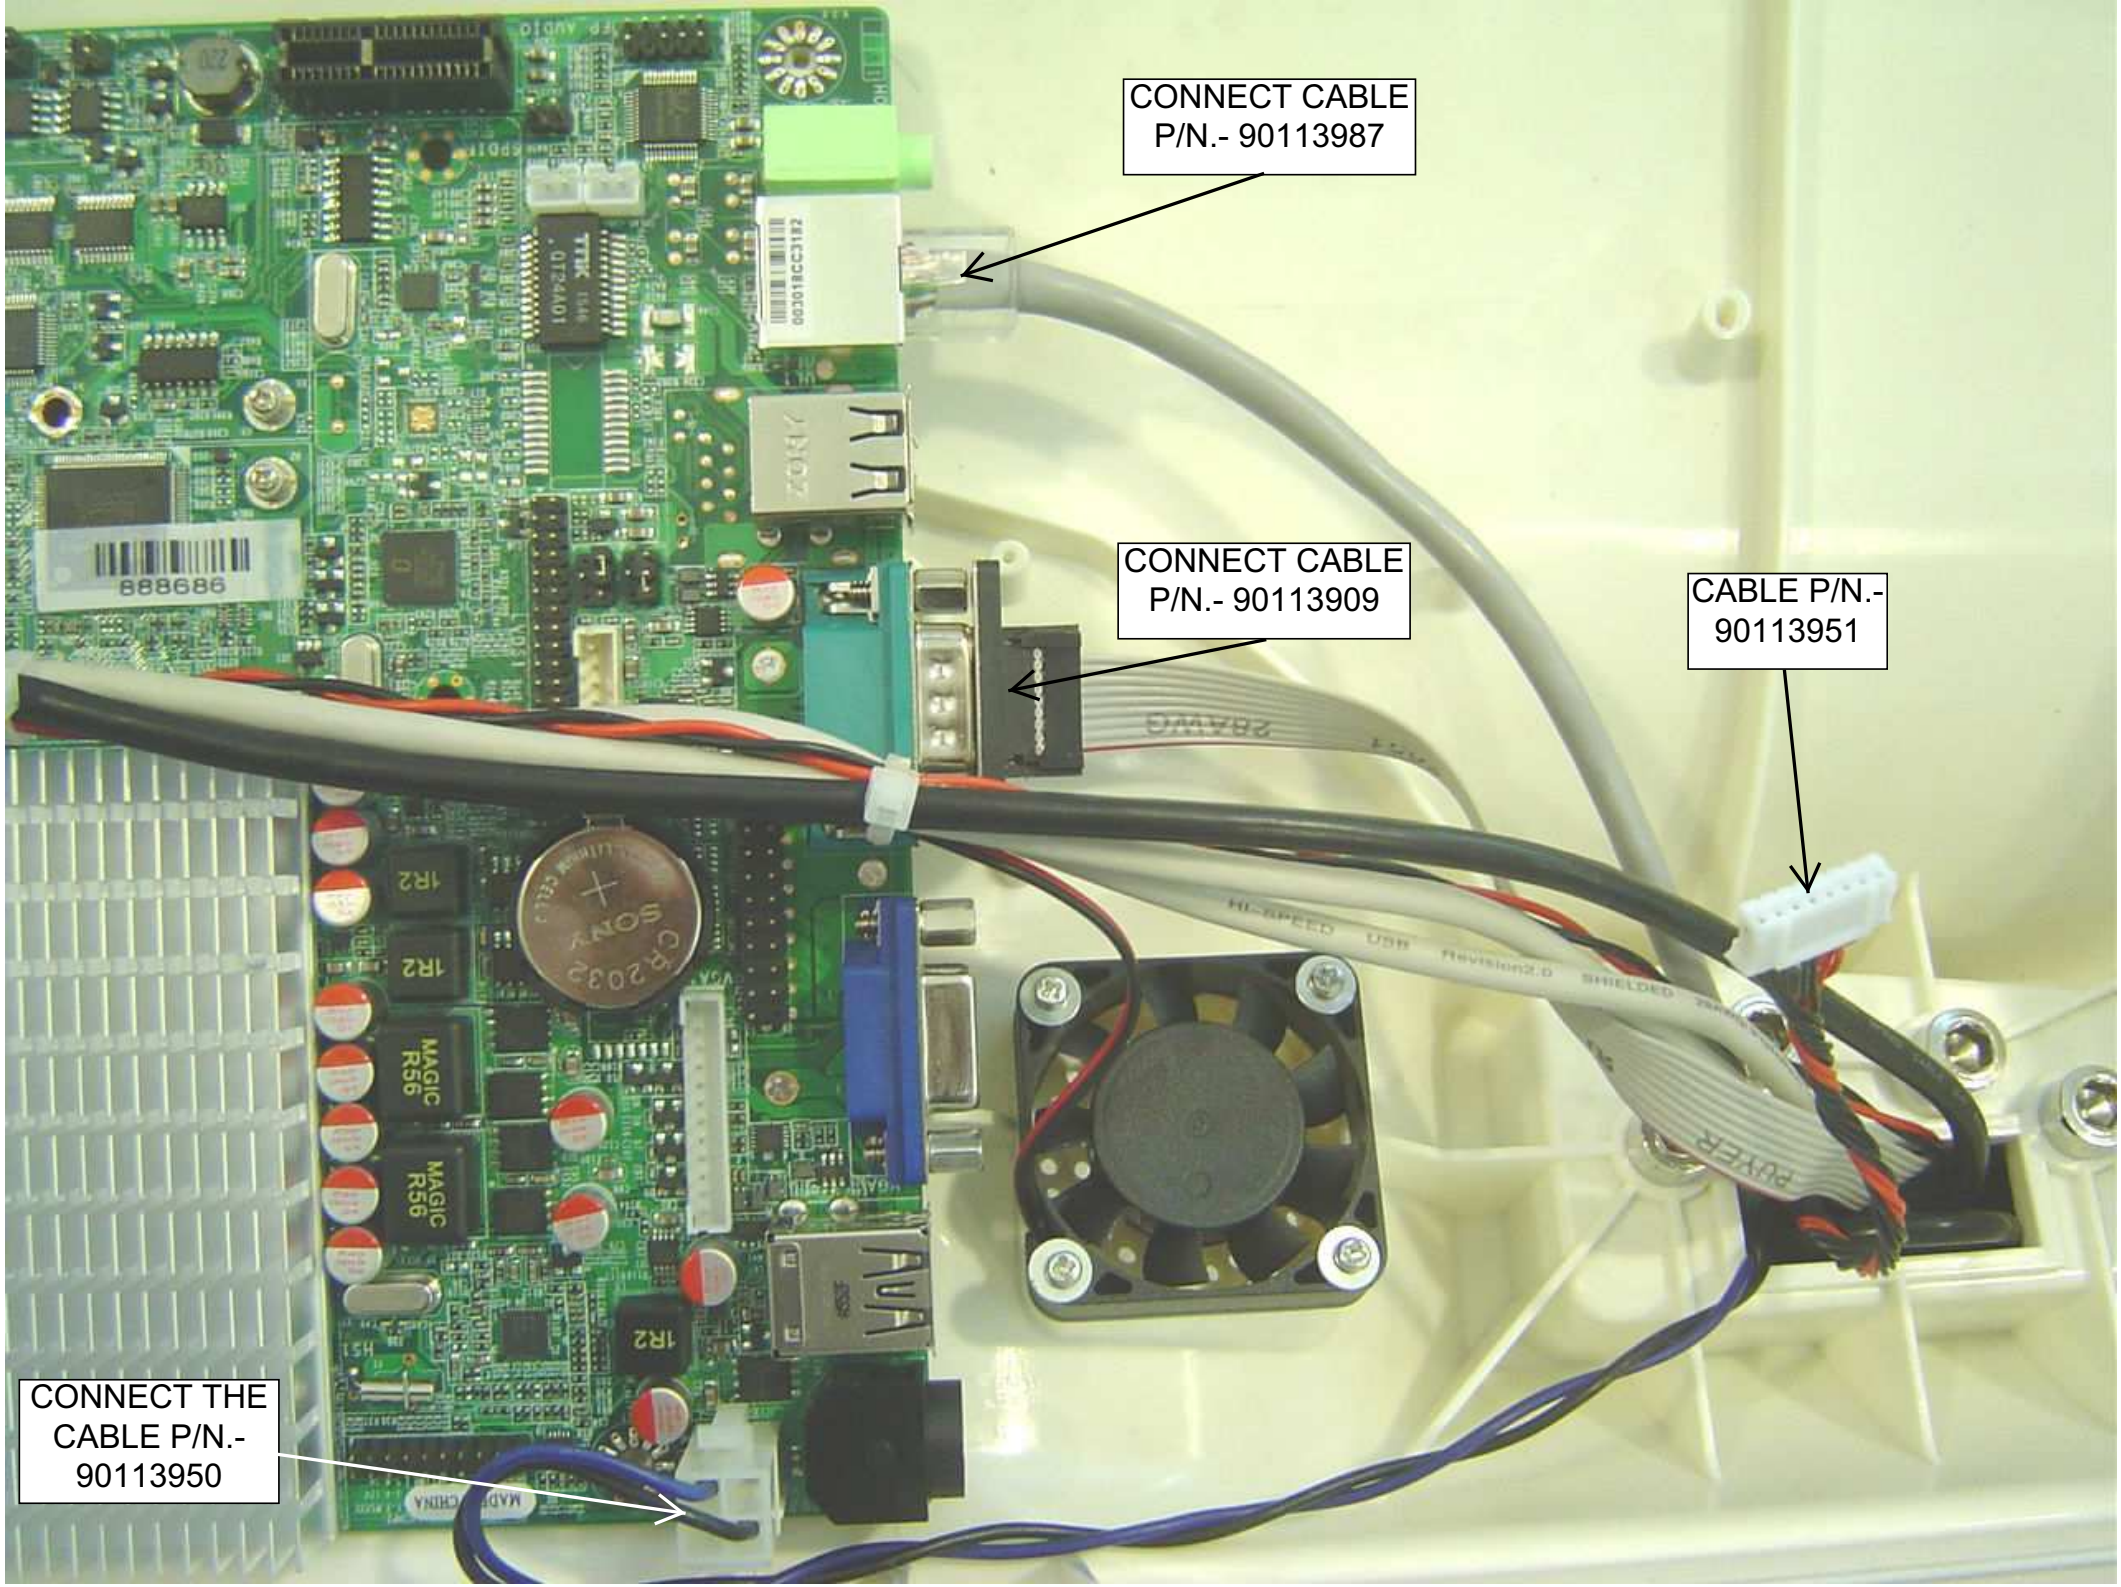

# 11.- ASSEMBLY HARD DISK (COMPONENTS )


THIS CABLE  
COME WITH THE  
MOTHER BOARD  
OR P/N.-  
90113954

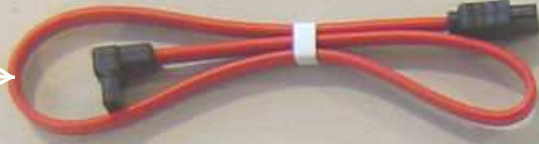


P/N.-  
90113946



P/N.- 73100002  
(2)

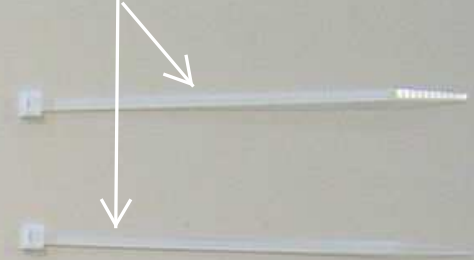

P/N.- 72031015  
(M3 X 6 mm) (4)




P/N.- 72056003  
(2)



P/N.- 73050004  
(2)




P/N.-  
71210512

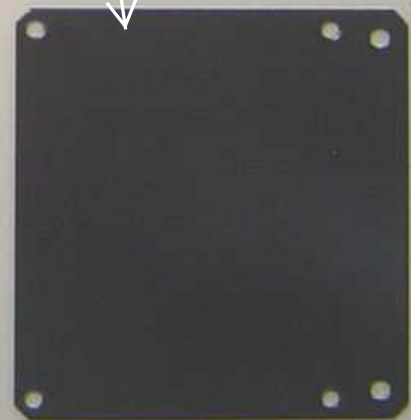

P/N.- 91008064  
(60 / 64 GB)



HOLD FLASH  
DISK P/N.-  
91008064 TO  
SUPPORT P/N.-  
71210512 WITH 4  
SCREWS P/N.-  
72031015 (THIS  
SCREWS HAVE  
TO BE M3 X 6  
mm )

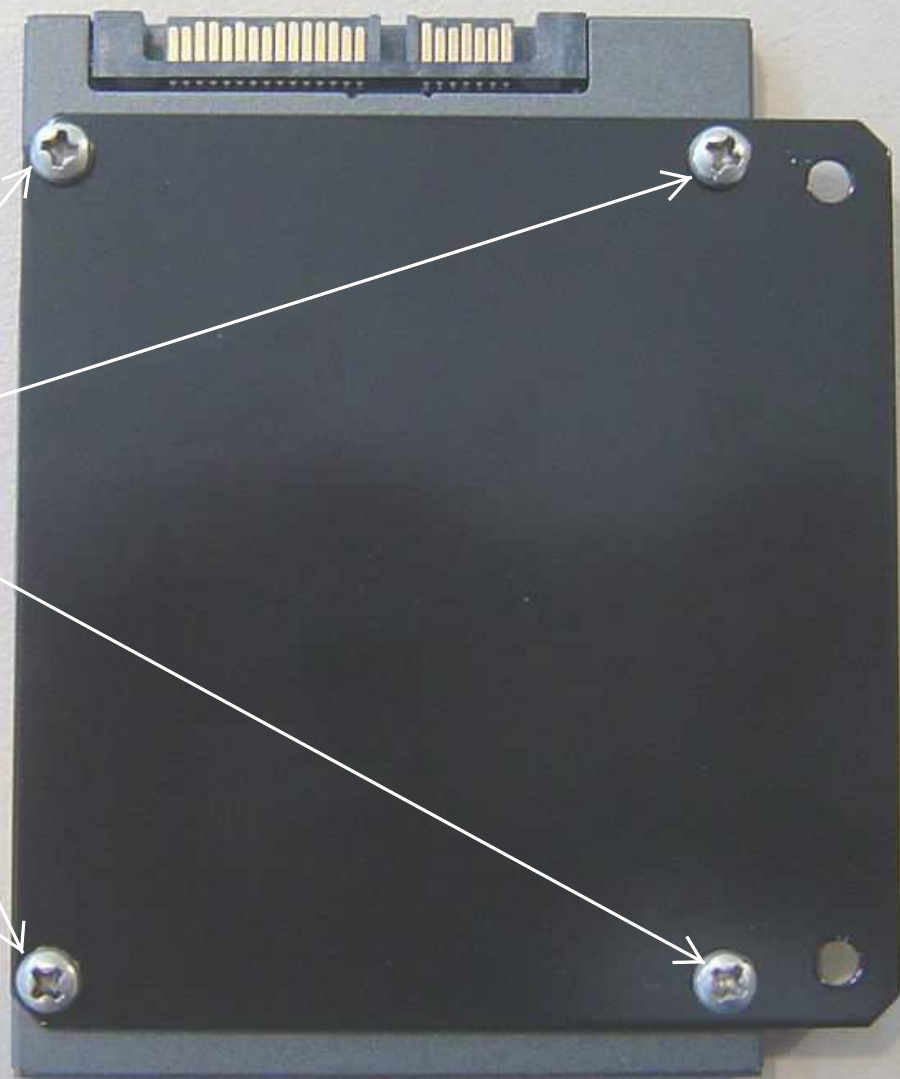

HOLD THE CABLES WITH A FLANGE P/N.- 73100002


CONNECT CABLE P/N.- 90113946

APPLY TAPE, TO PREVENT DISCONNECT WIRES

PASTE THE STICK P/N.- 70000456


CONNECT SATA CABLE

HOLD SUPPORT TO CONSOLA WITH WHASER P/N.- 72200009 AND 2 SCREWS P/N.- 72056003

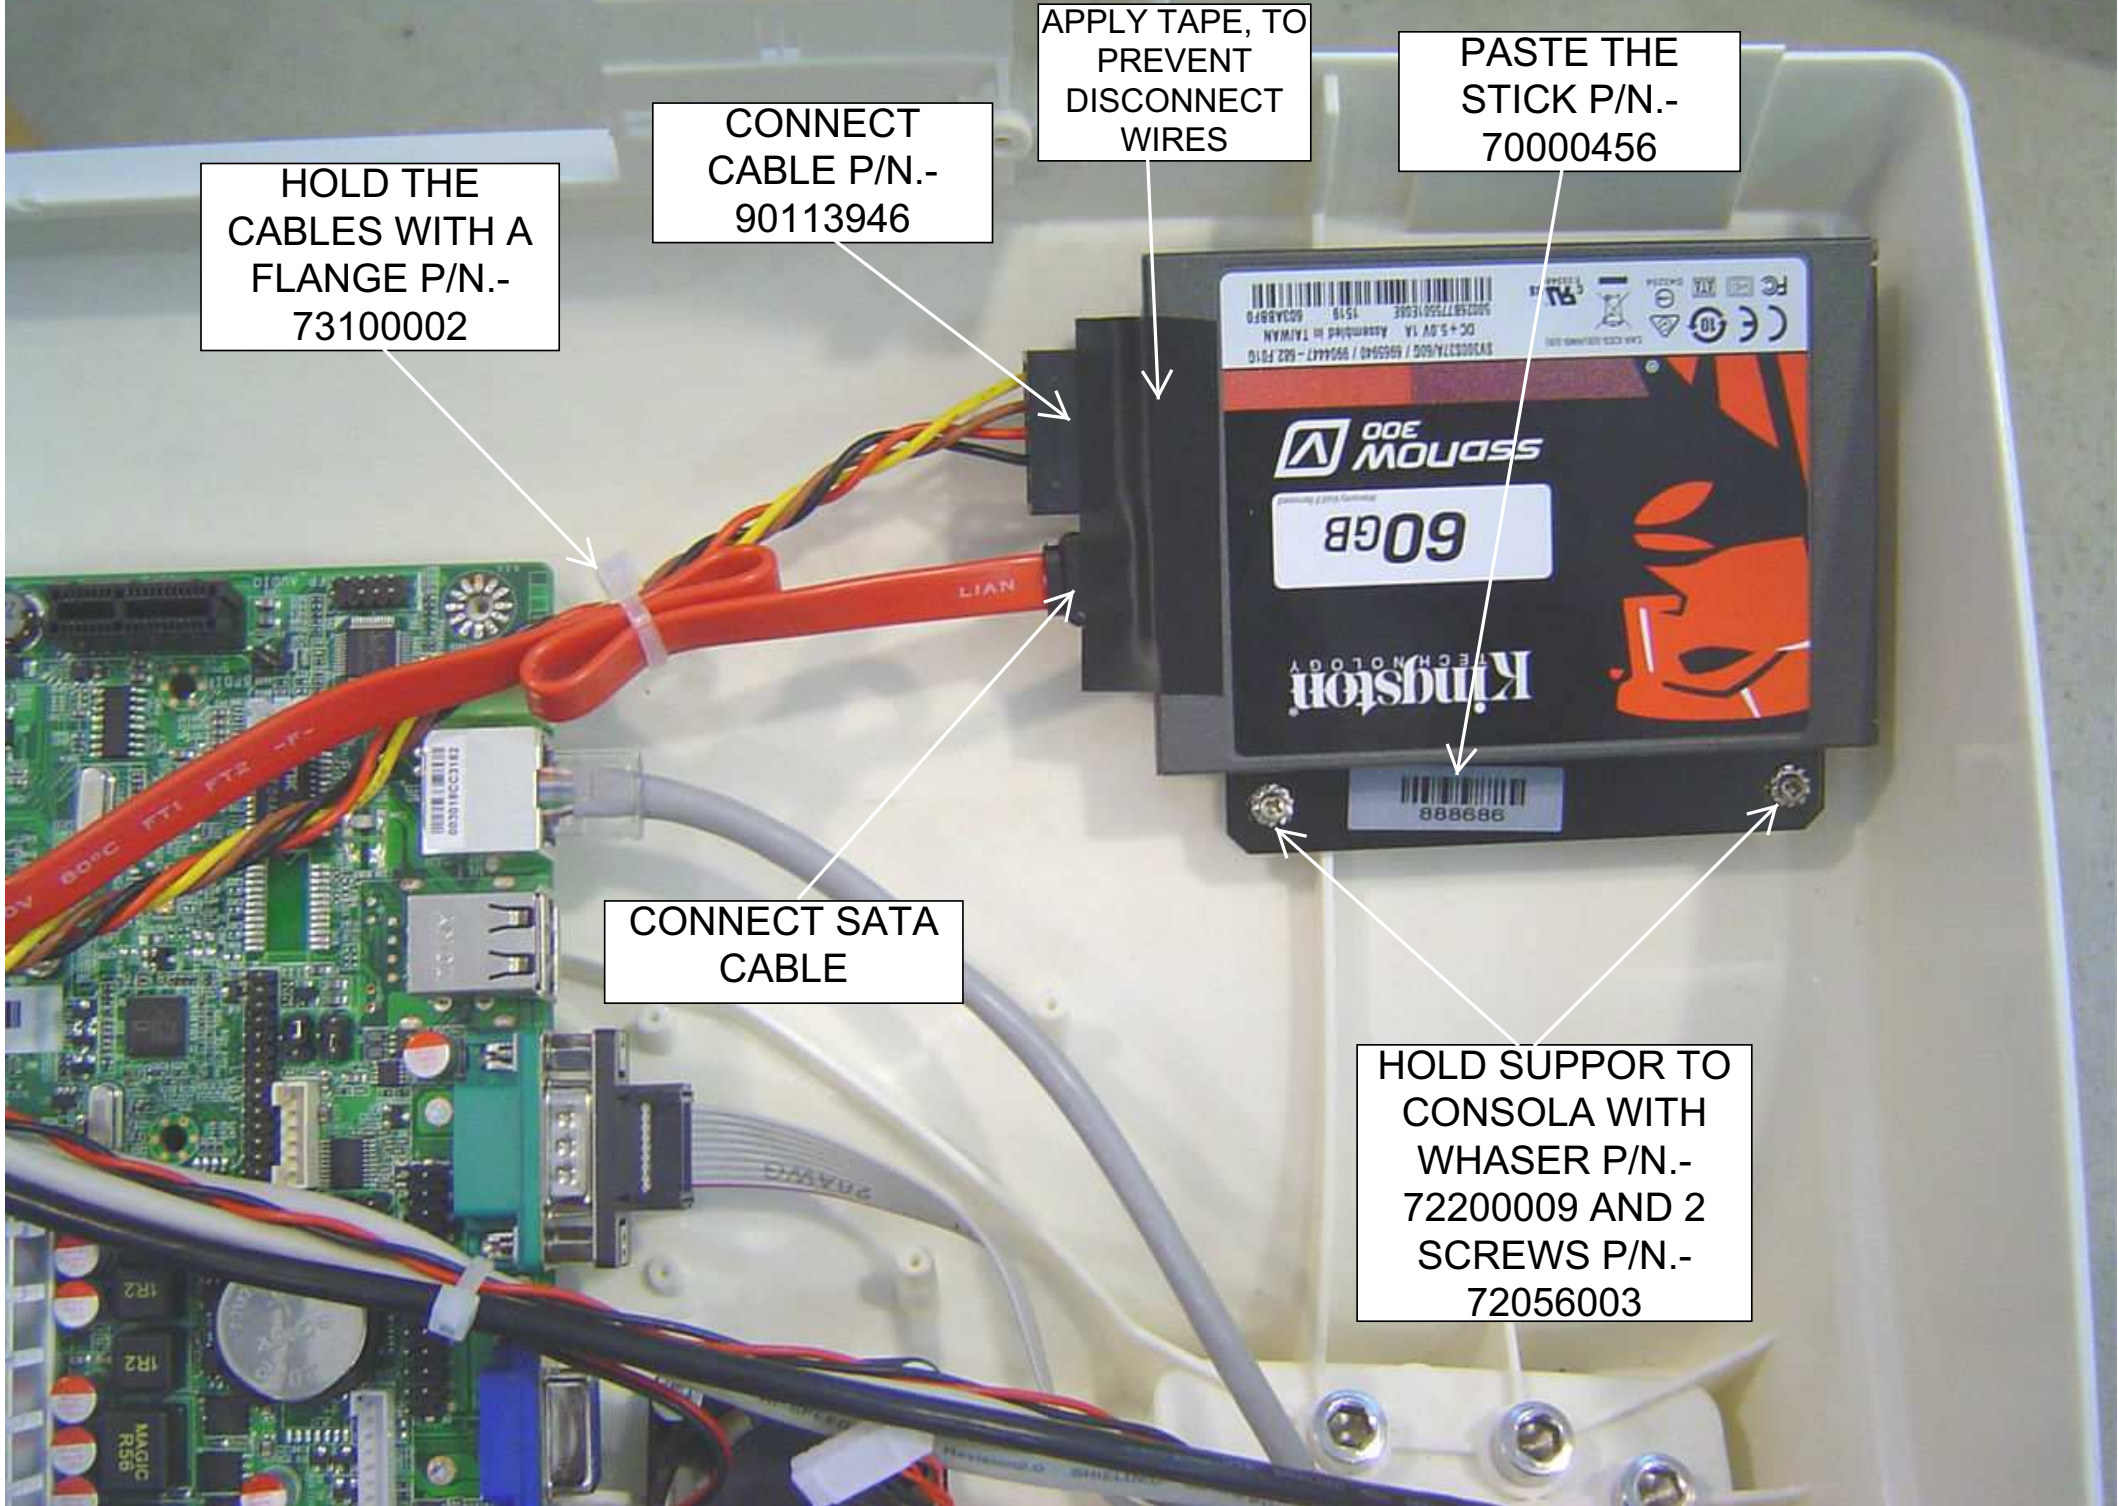

CONNECT CABLE  
SATA II P/N.-  
90113954 TO MAIN  
BOARD AND FLASH  
DISK

CONNECT CABLE SATA  
POWER P/N.- 9113946 TO  
MAIN BOARD AND FLASH  
DISK

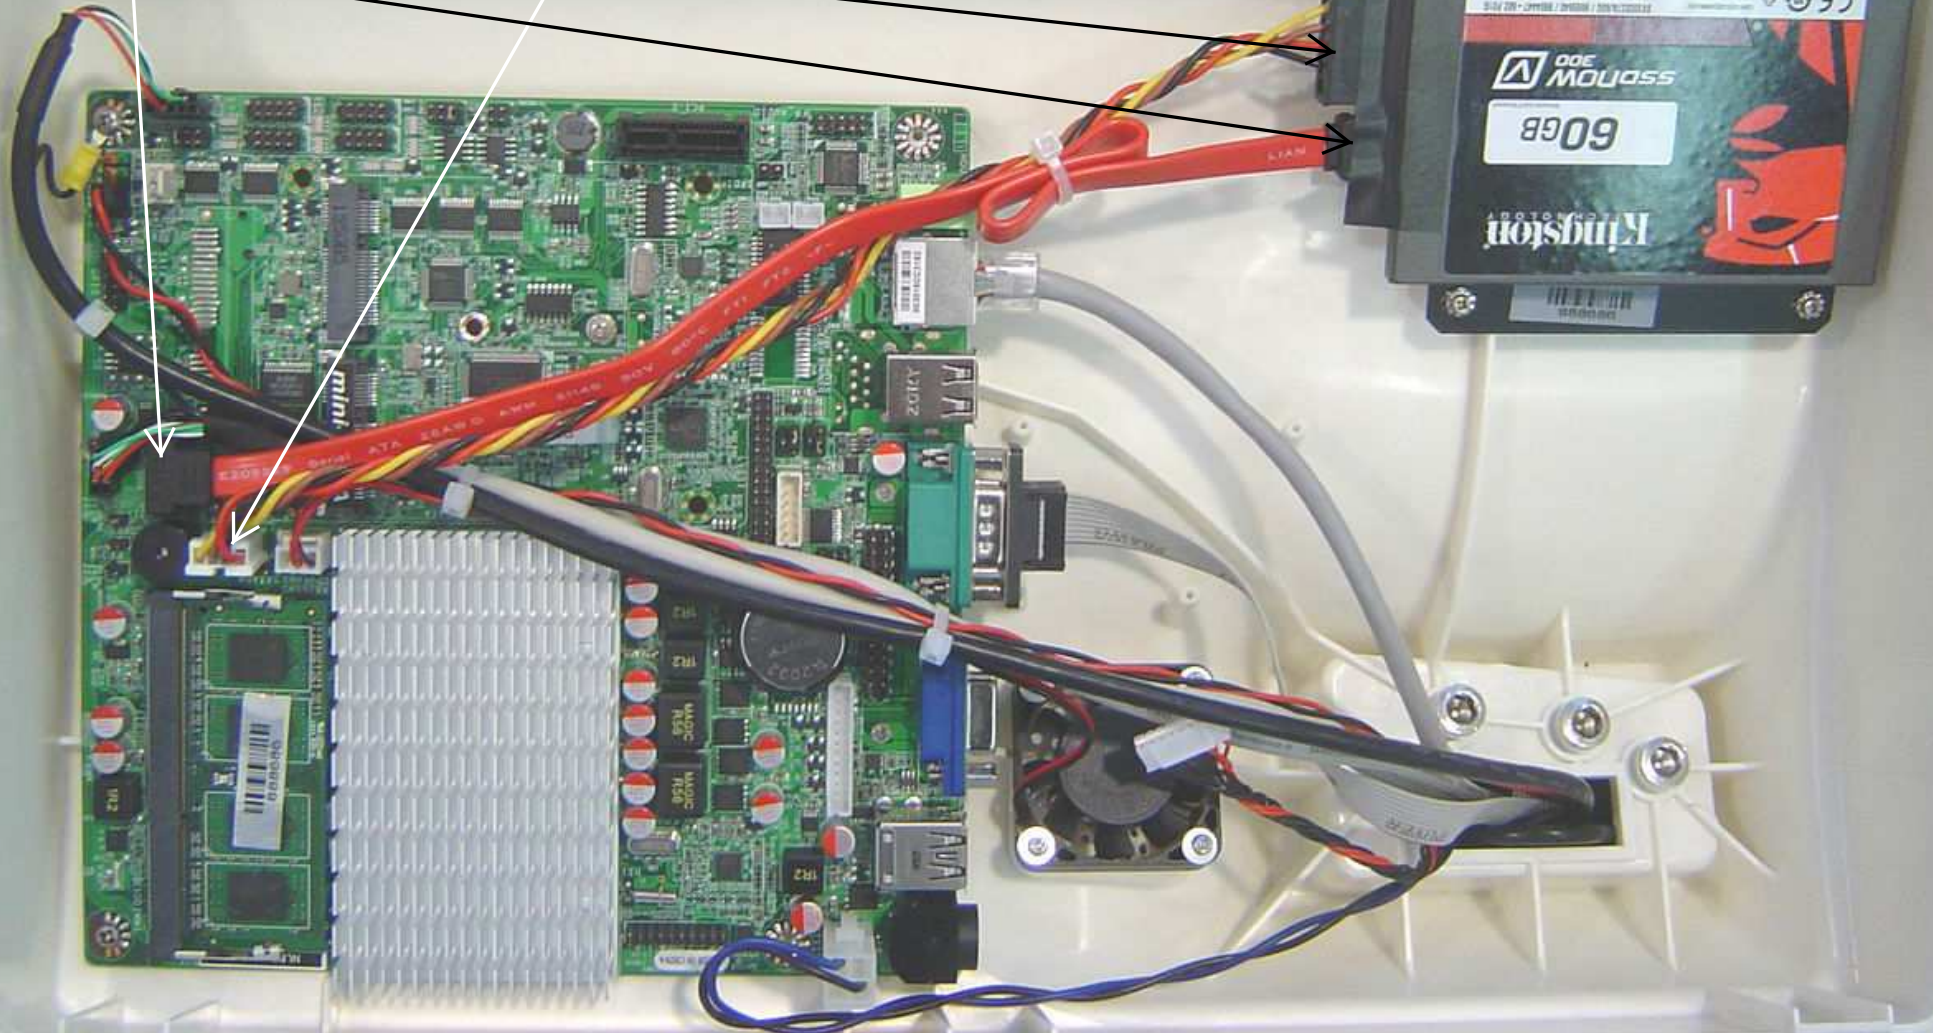

# 12. CONNECT CABLES (COMPONENTS)

P/N.-  
73100002  
(2)

P/N.-  
90114079


P/N.-  
90114069

P/N.-  
90114078

P/N.-  
90114077

P/N.-  
90114067

P/N.-  
90113933

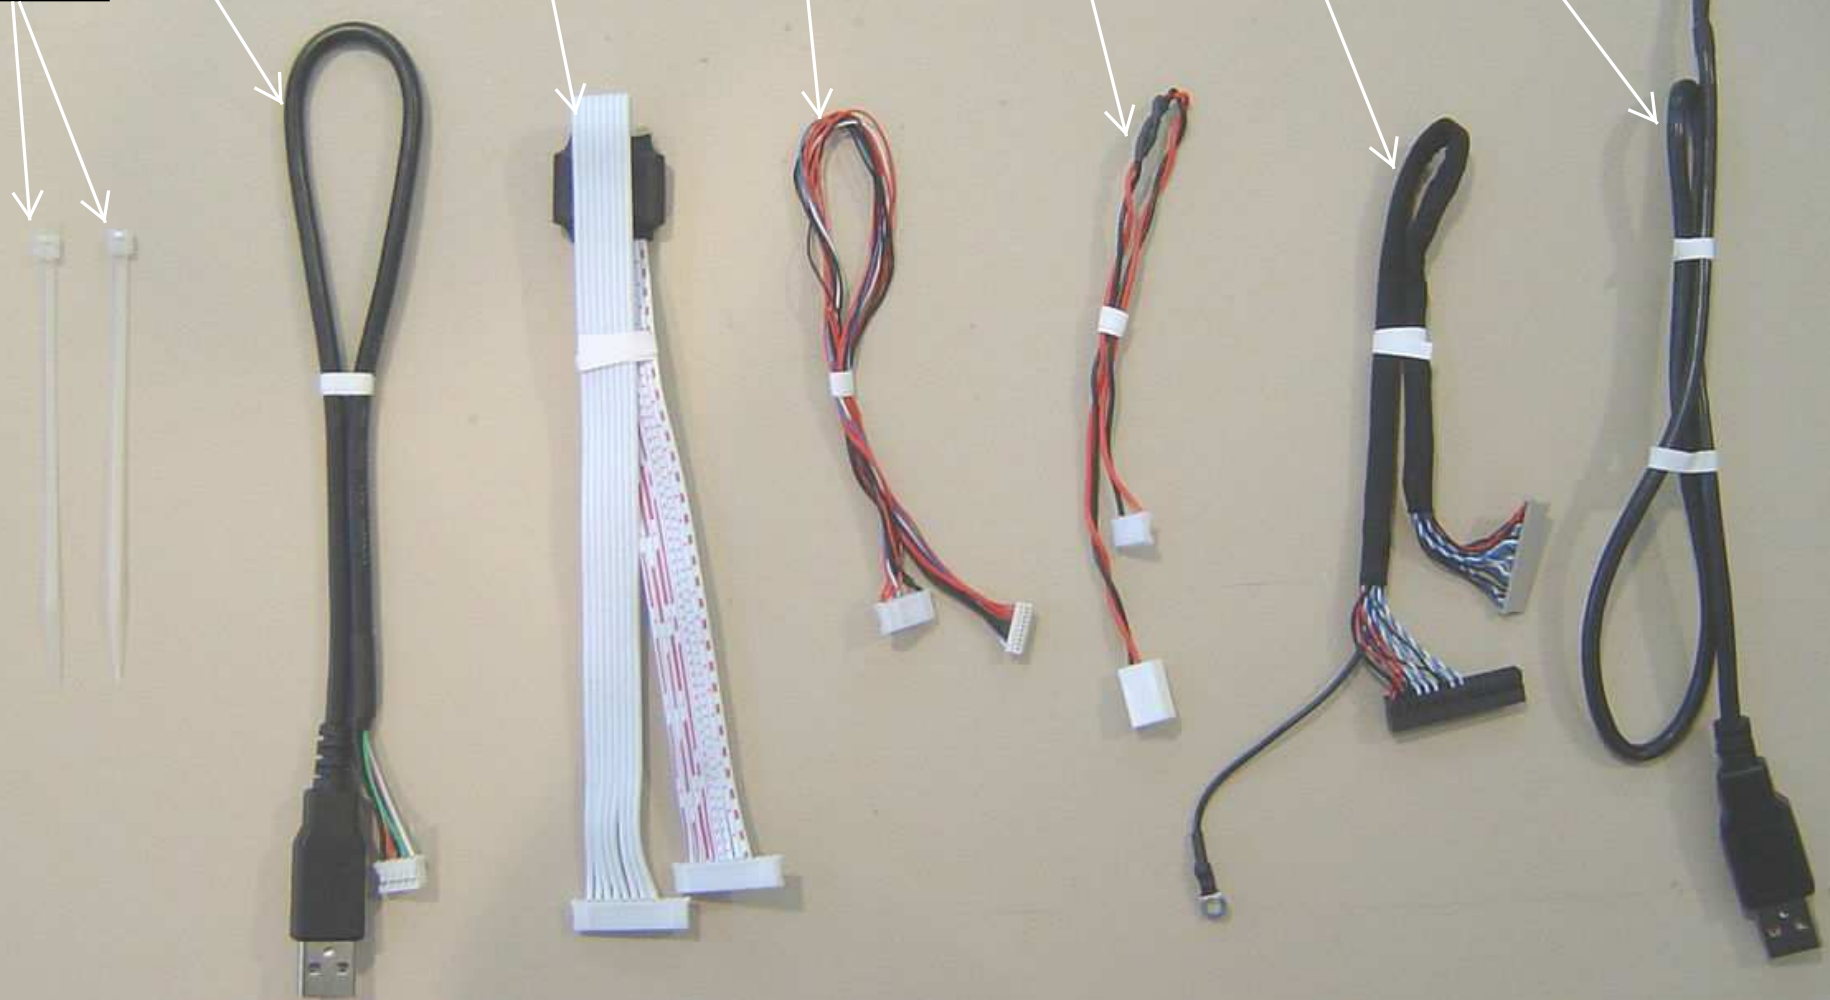

CONNECT THE  
CABLE P/N.-  
90114077

CONNECT THE  
CABLE P/N.-  
90114067

CONNECT THE  
CABLE P/N.-  
90114078


HOLD MOTHER BOARD AND  
TERMINAL GROUND OF CABLE P/N.-  
90114067 WITH WHASER P/N.-  
73050004 AND SCREW P/N.- 72056007

RED  
CABLES


CONNECT THE  
CABLE P/N.-  
90113933 IN  
BOTTOM  
CONNECTOR

CONNECT THE  
CABLE P/N.-  
90114069

CONNECT THE  
CABLE P/N.-  
90114079 IN UP  
CONNECTOR

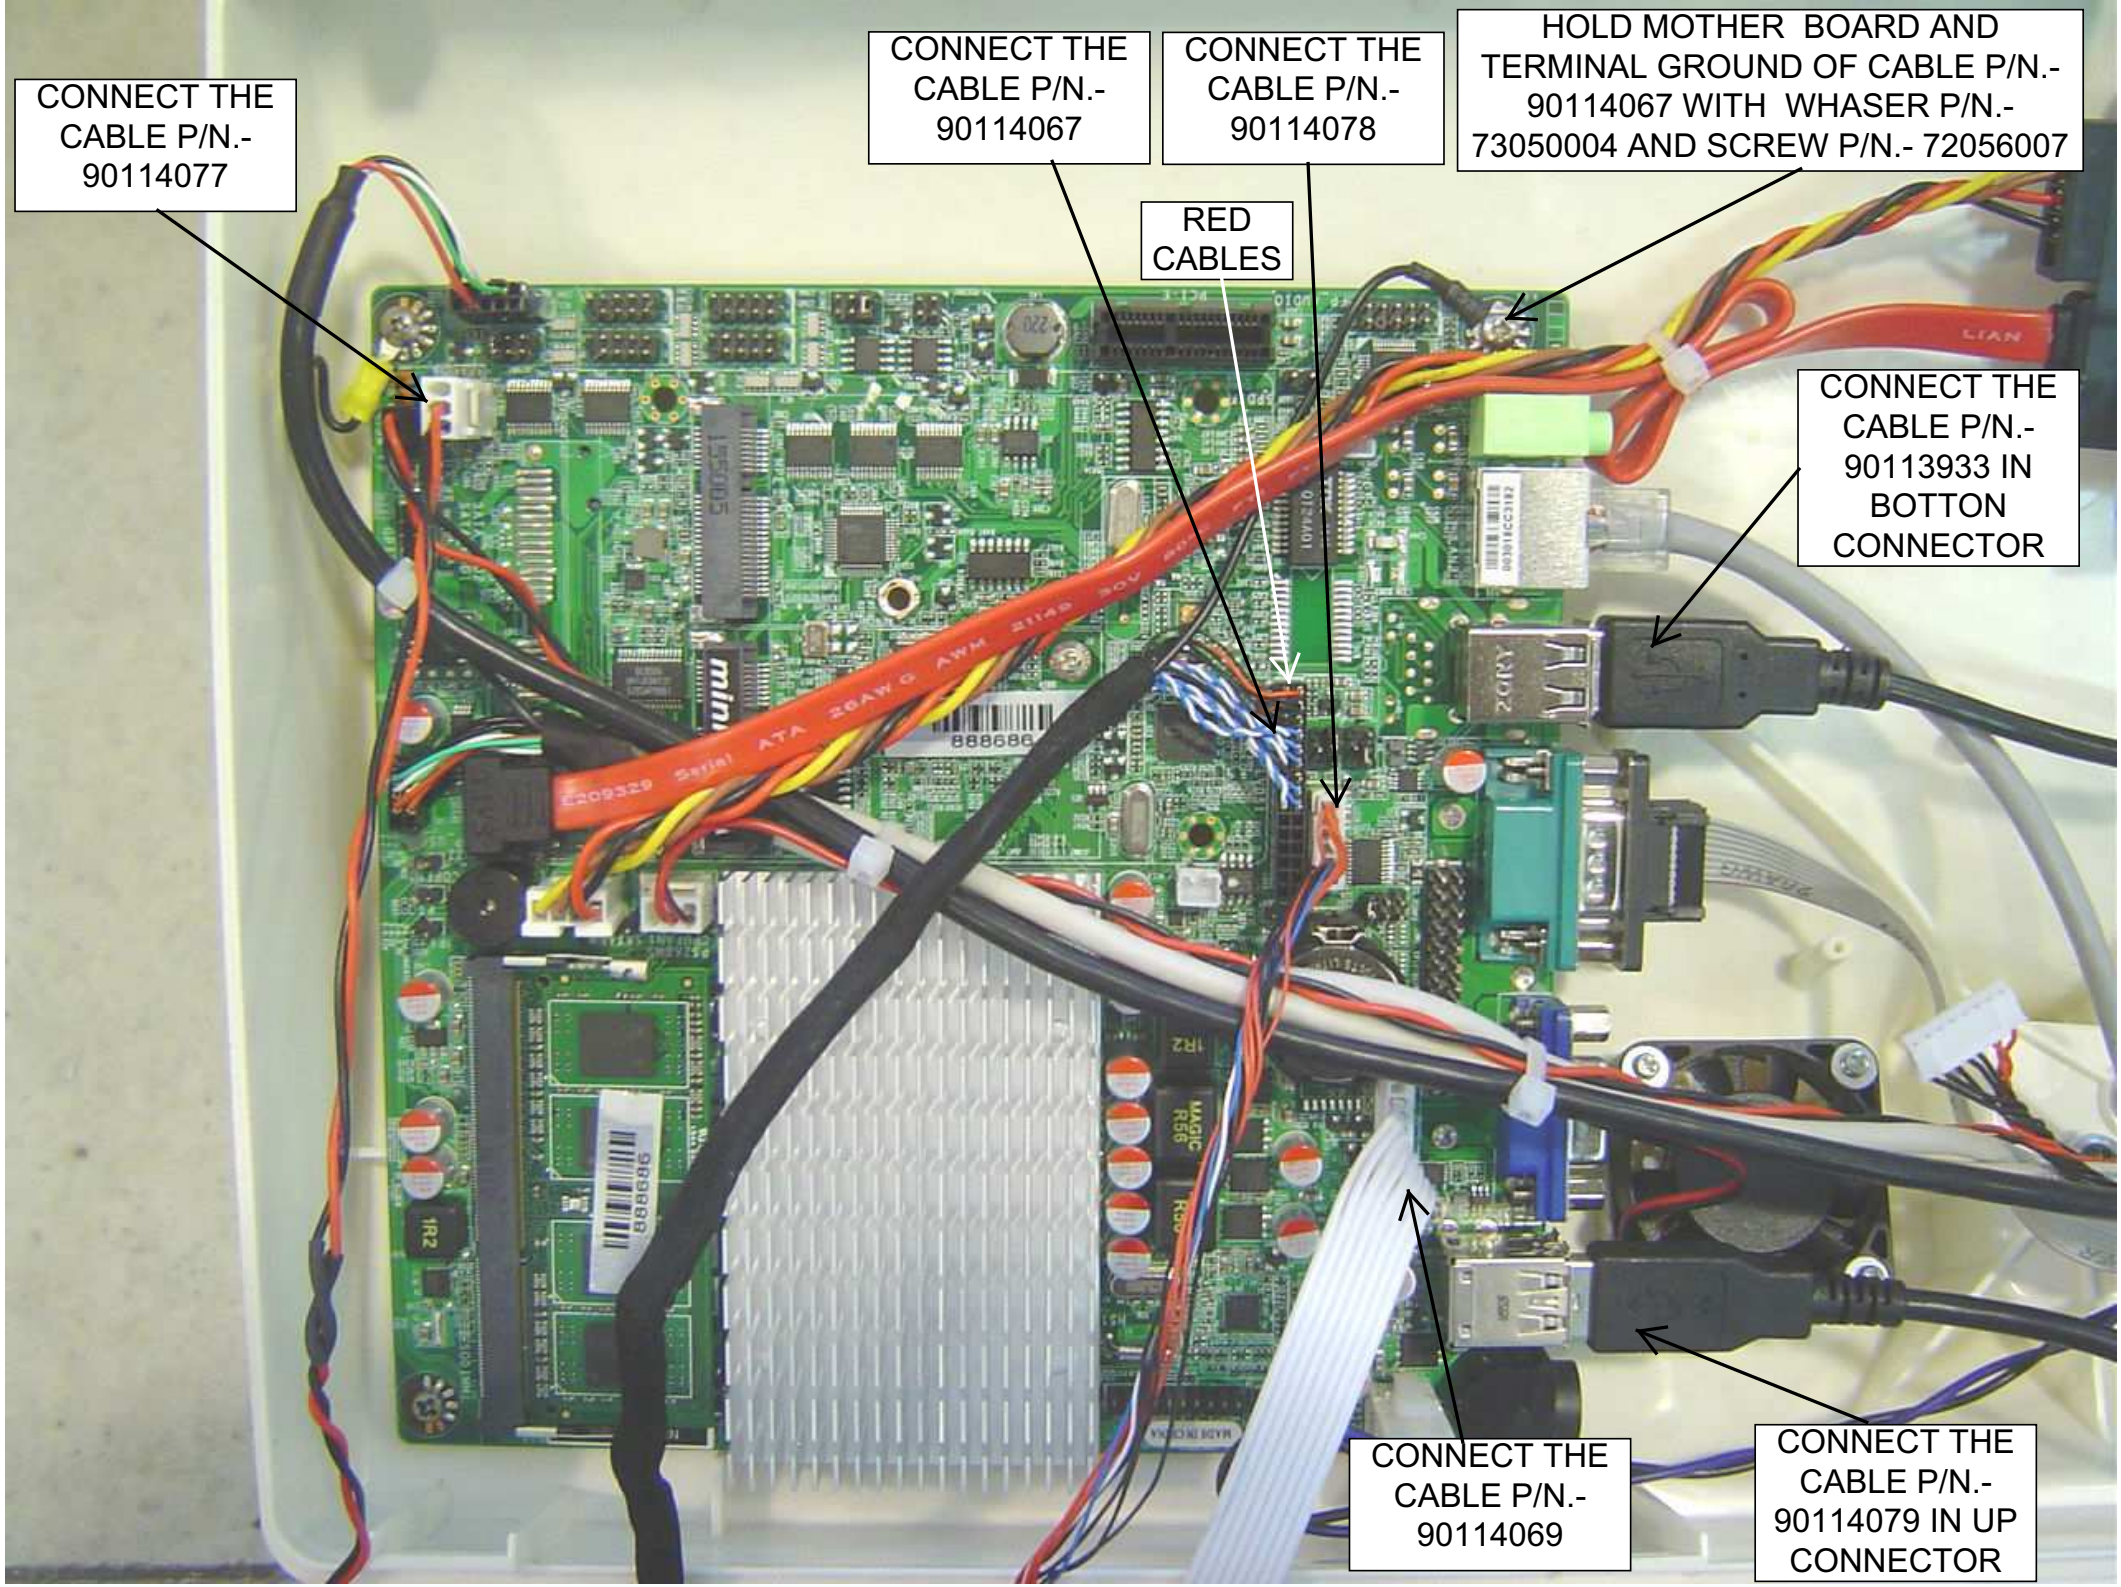


# OVERVIEW

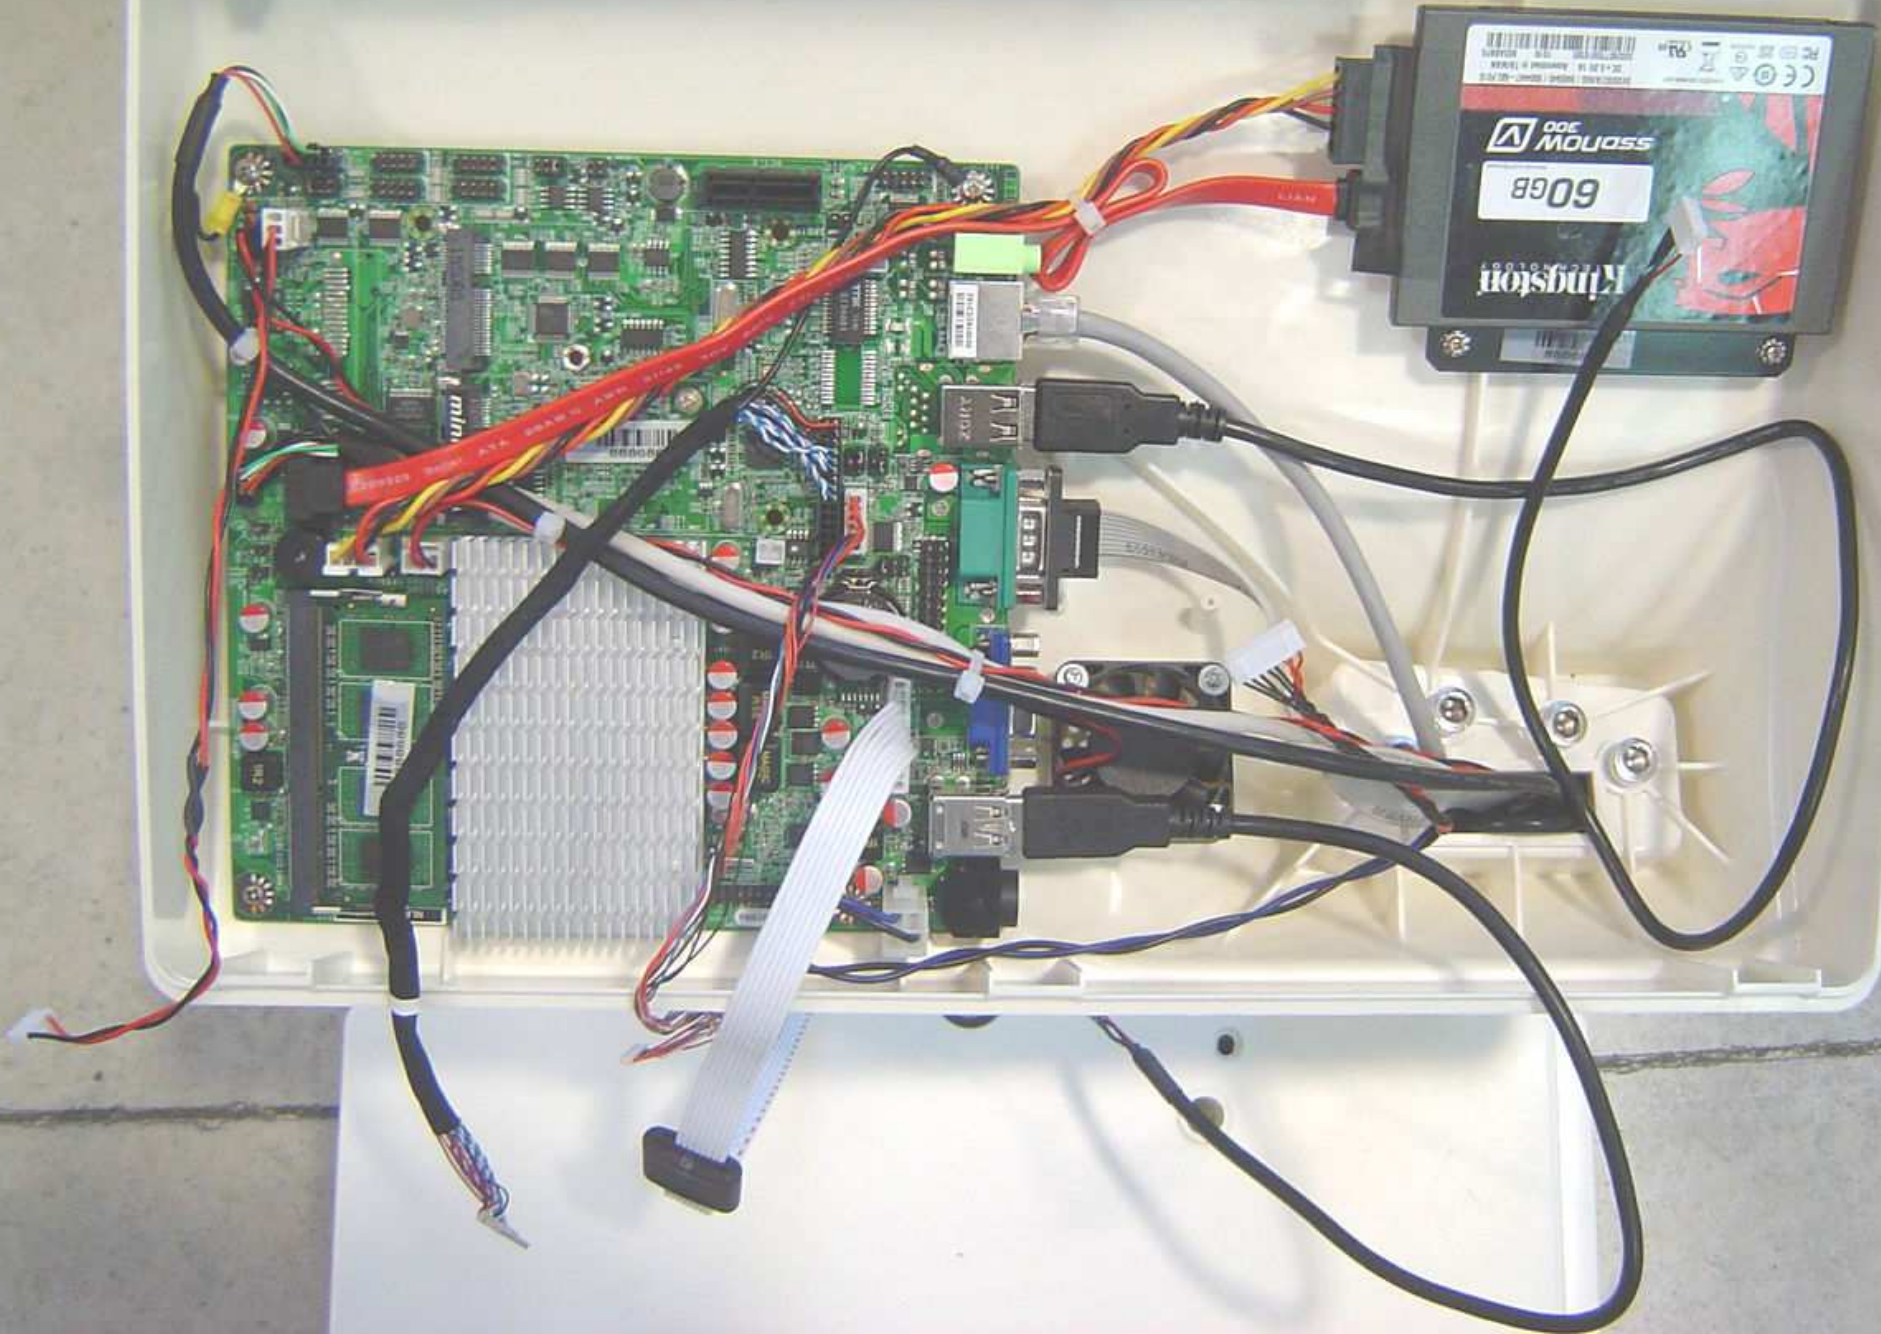



# 13.- ASSEMBLY BACK MONITOR (COMPONENTS )

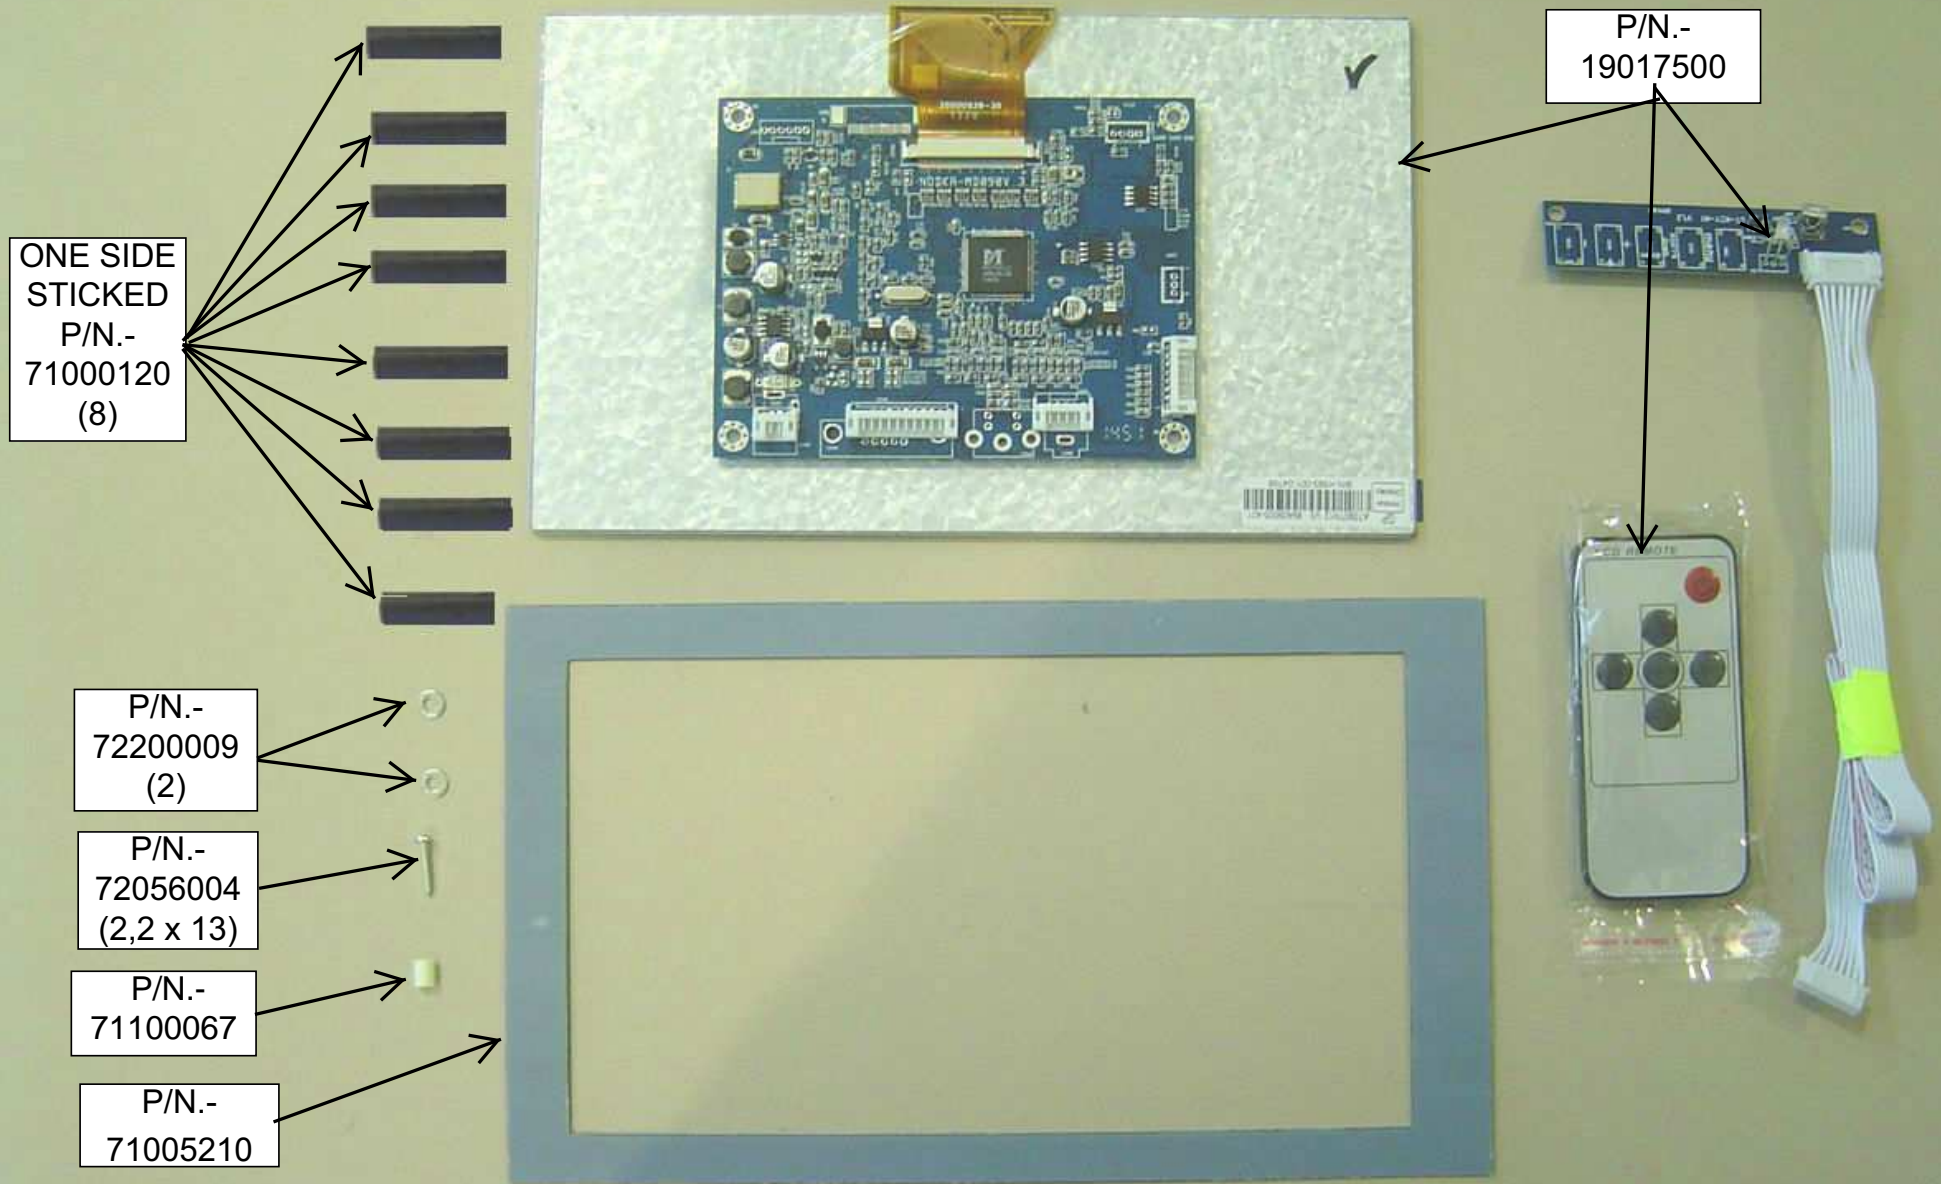

HOLD THE DETECTOR BOARD WITH  
SPACER P/N.- 71100067, WHASERS P/N.-  
72200009 AND SCREW P/N.- 72046004

P/N.- 71100067


P/N.- 72200009  
(2)

P/N.- 72056004

CUT THESE  
PIECES OF  
PLASTIC (SEE  
NEXT  
PICTURE )

2cm  
1cm

1cm  
1cm

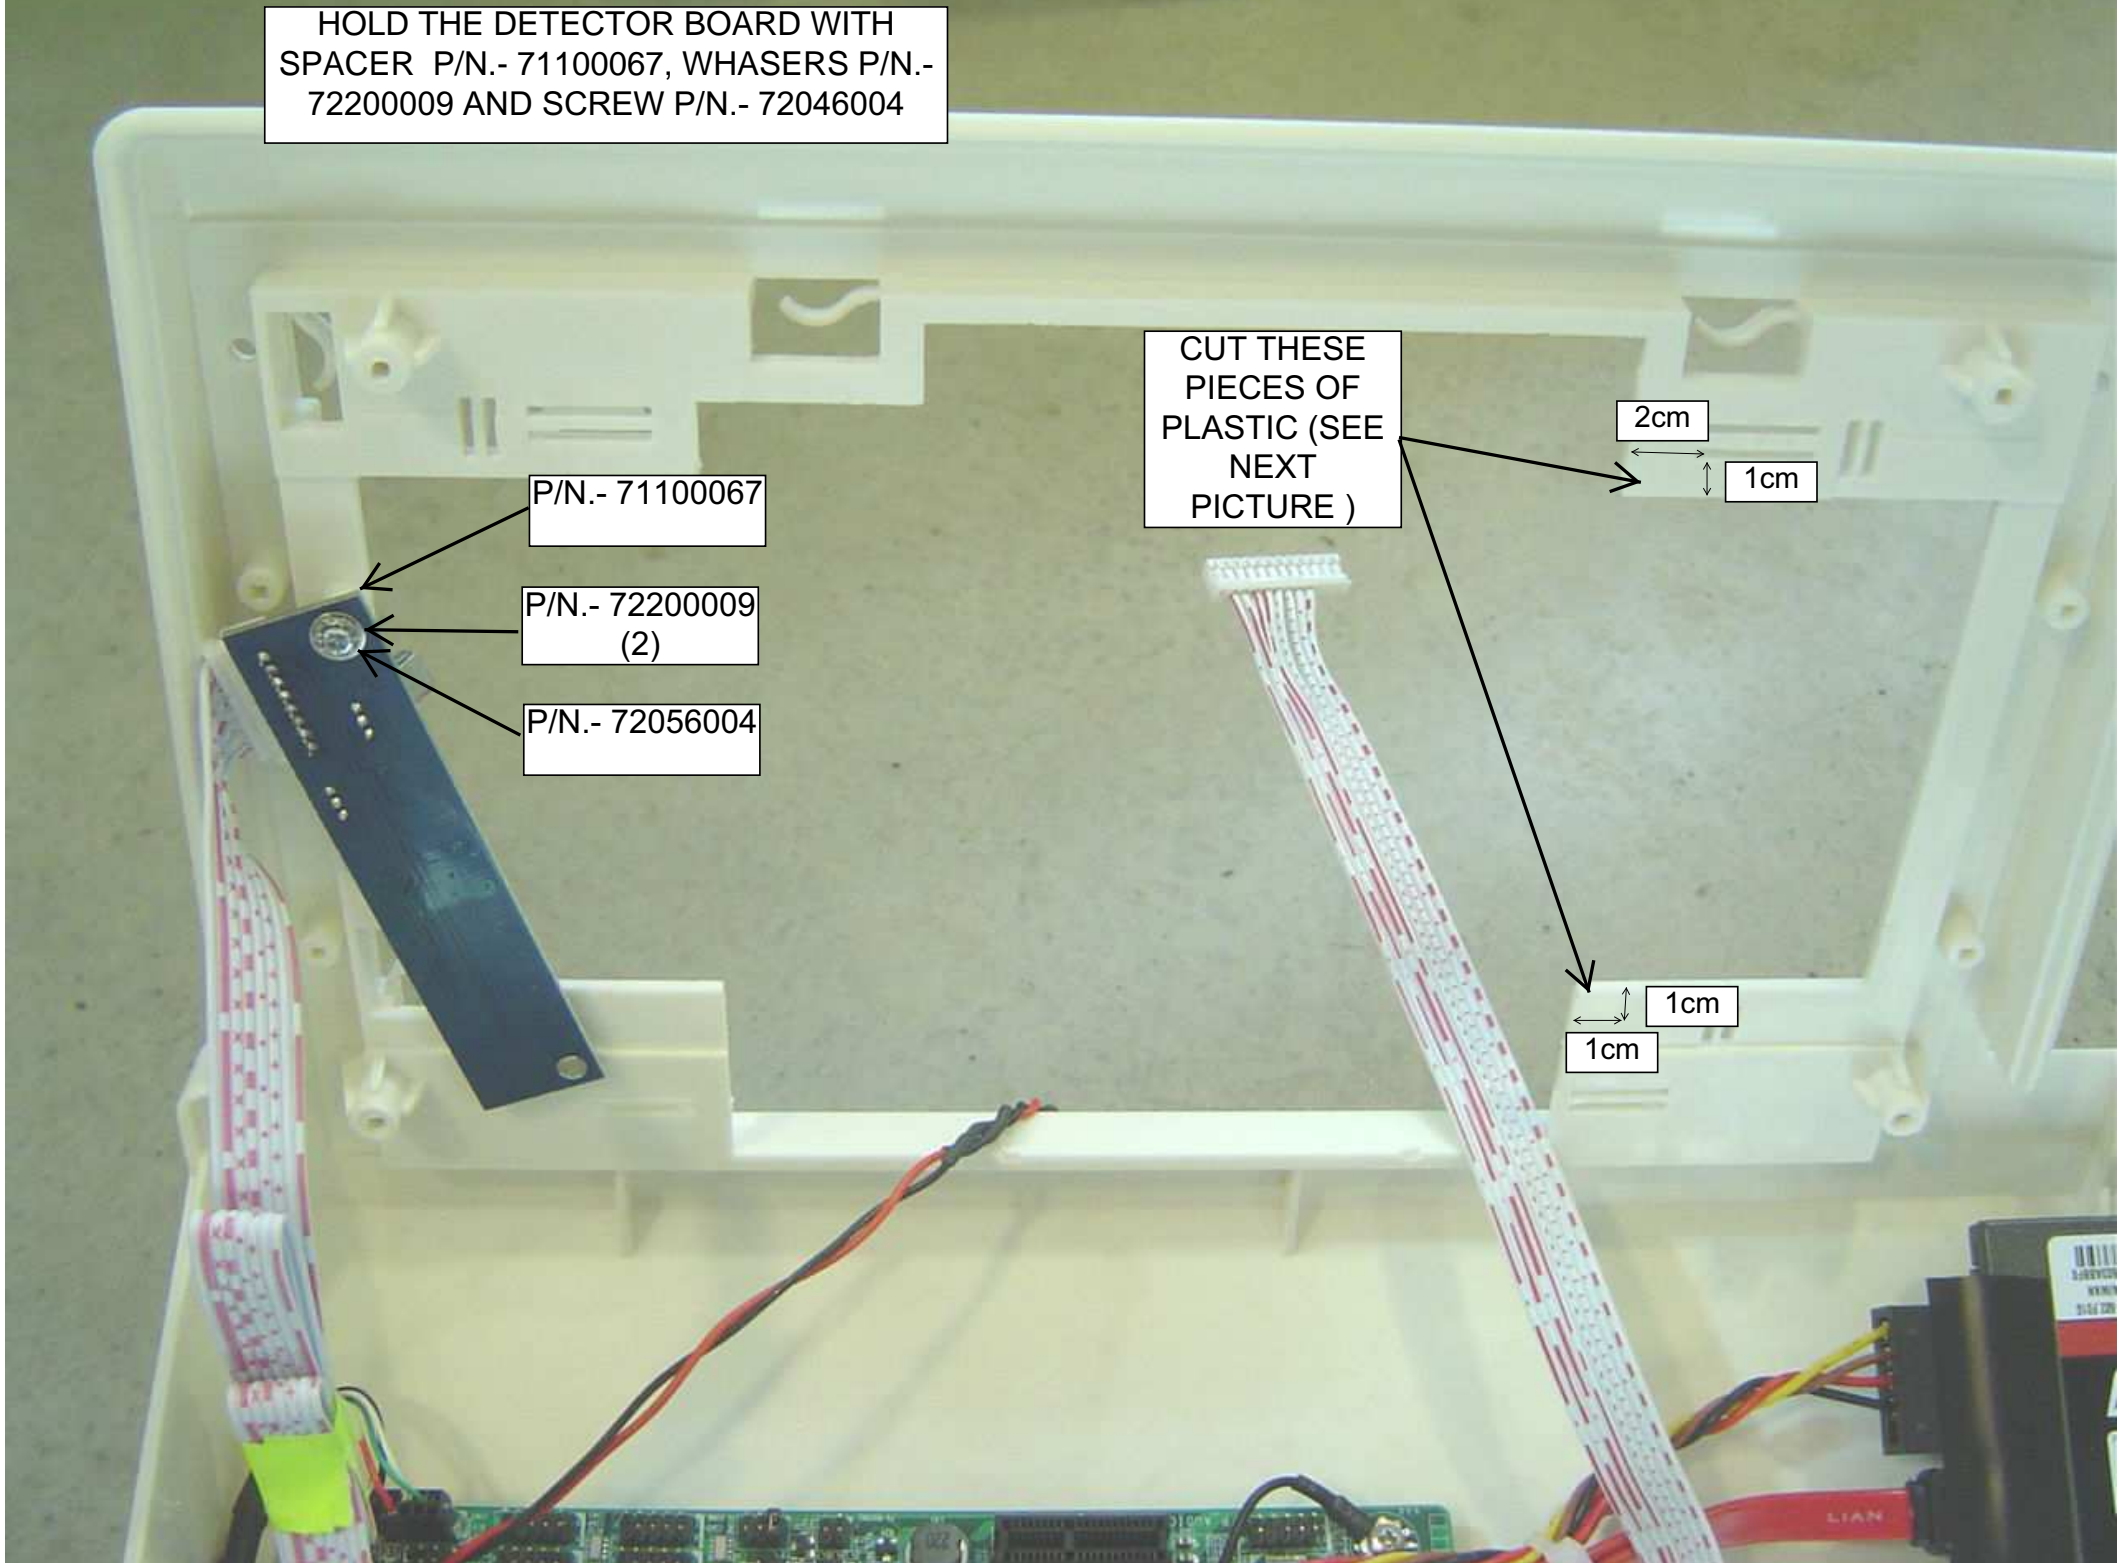


PASTE THE ONE  
SIDE STICKED  
P/N.- 71000120

VIEW OF  
PLASTIC PIECES  
CUT

PASTE THE ONE  
SIDE STICKED  
P/N.- 71000120

PUT THE  
DETECTOR  
CORRECTLY TO  
AVOID THAT ON  
THE SCREEN WHEN  
WE INSERT IT

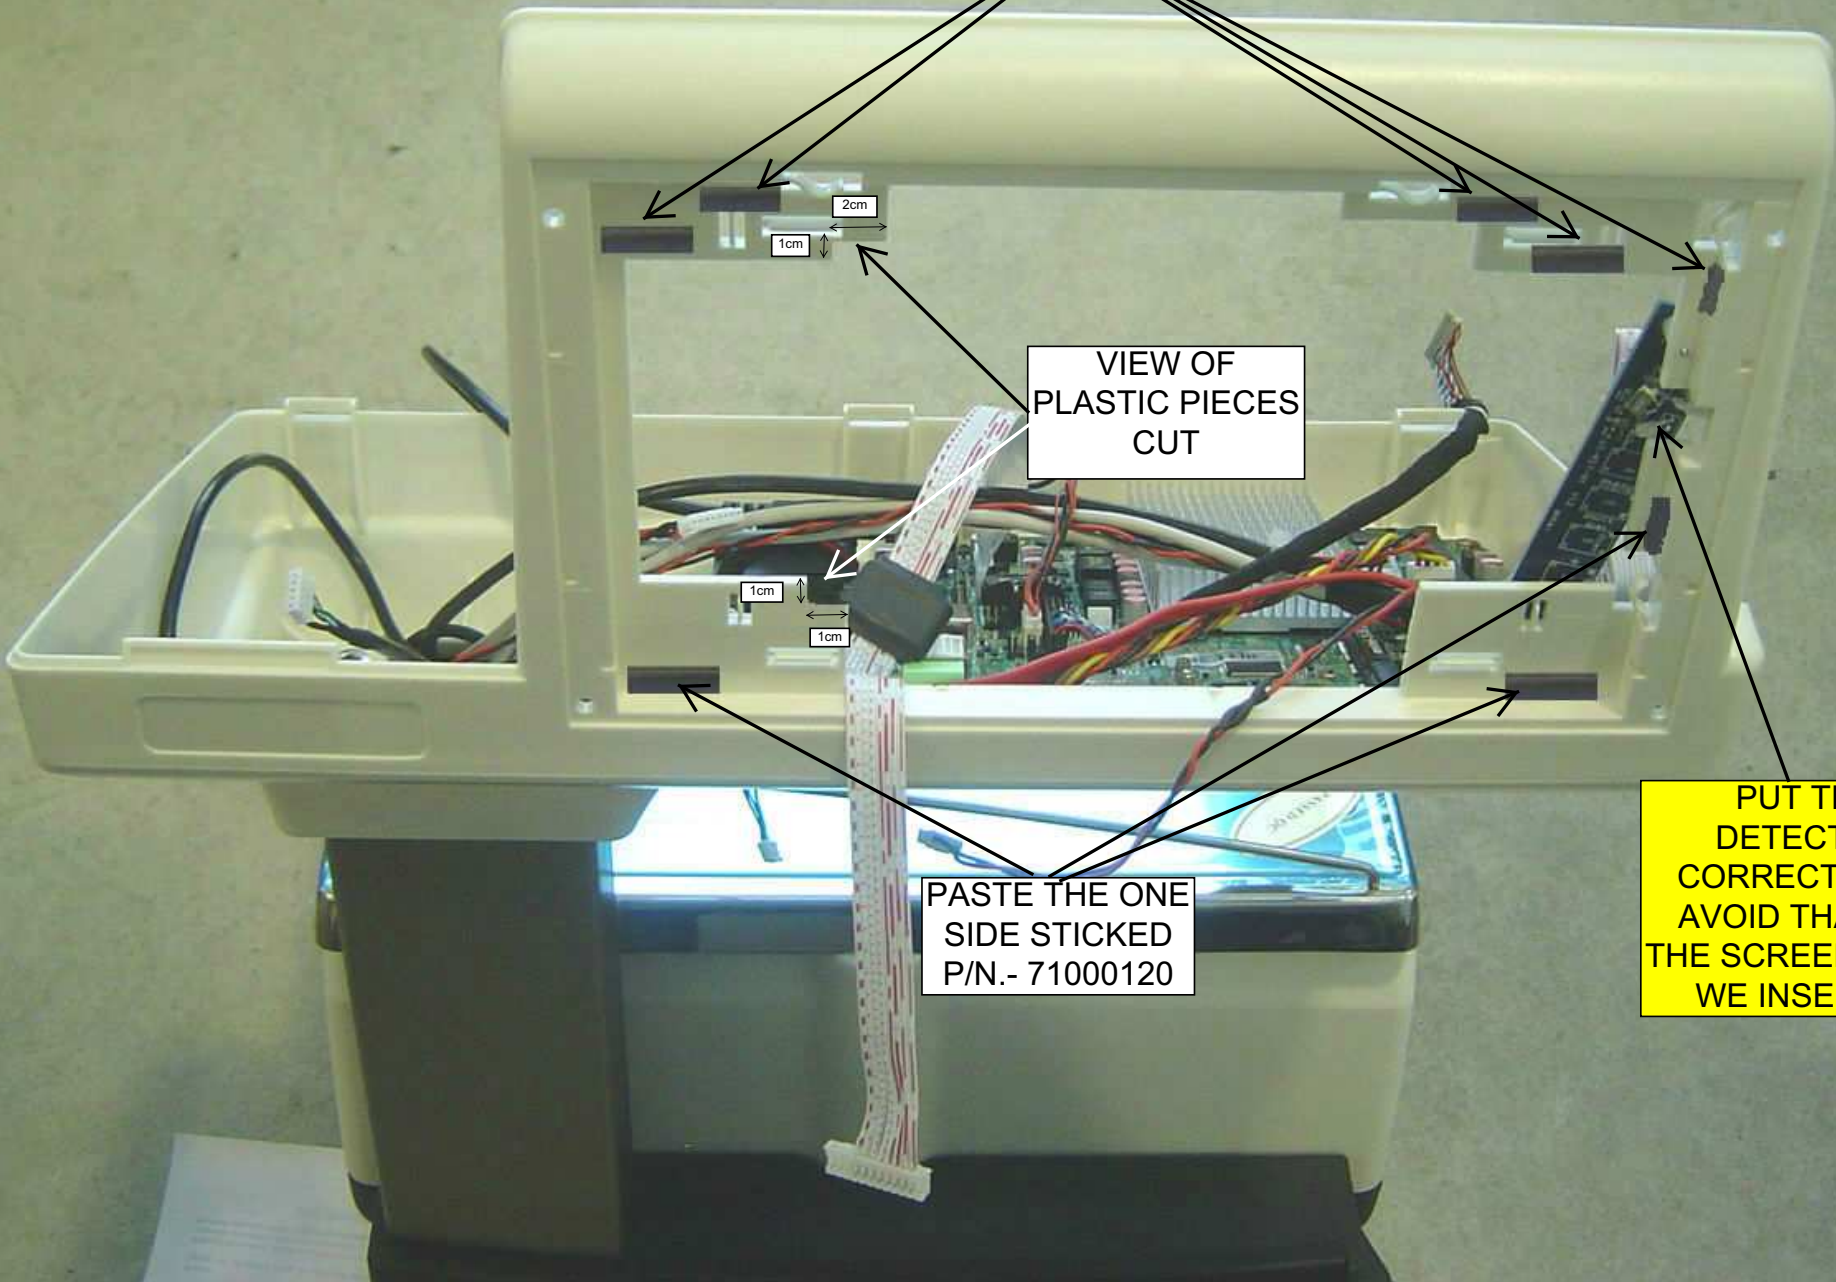

PUT THE MONITOR IN THIS  
POSITION




WIDE PART

CONNECT  
DETECTOR  
CABLE

CONNECT  
CABLE P/N.-  
90114069

CONNECT  
CABLE P/N.-  
90114077

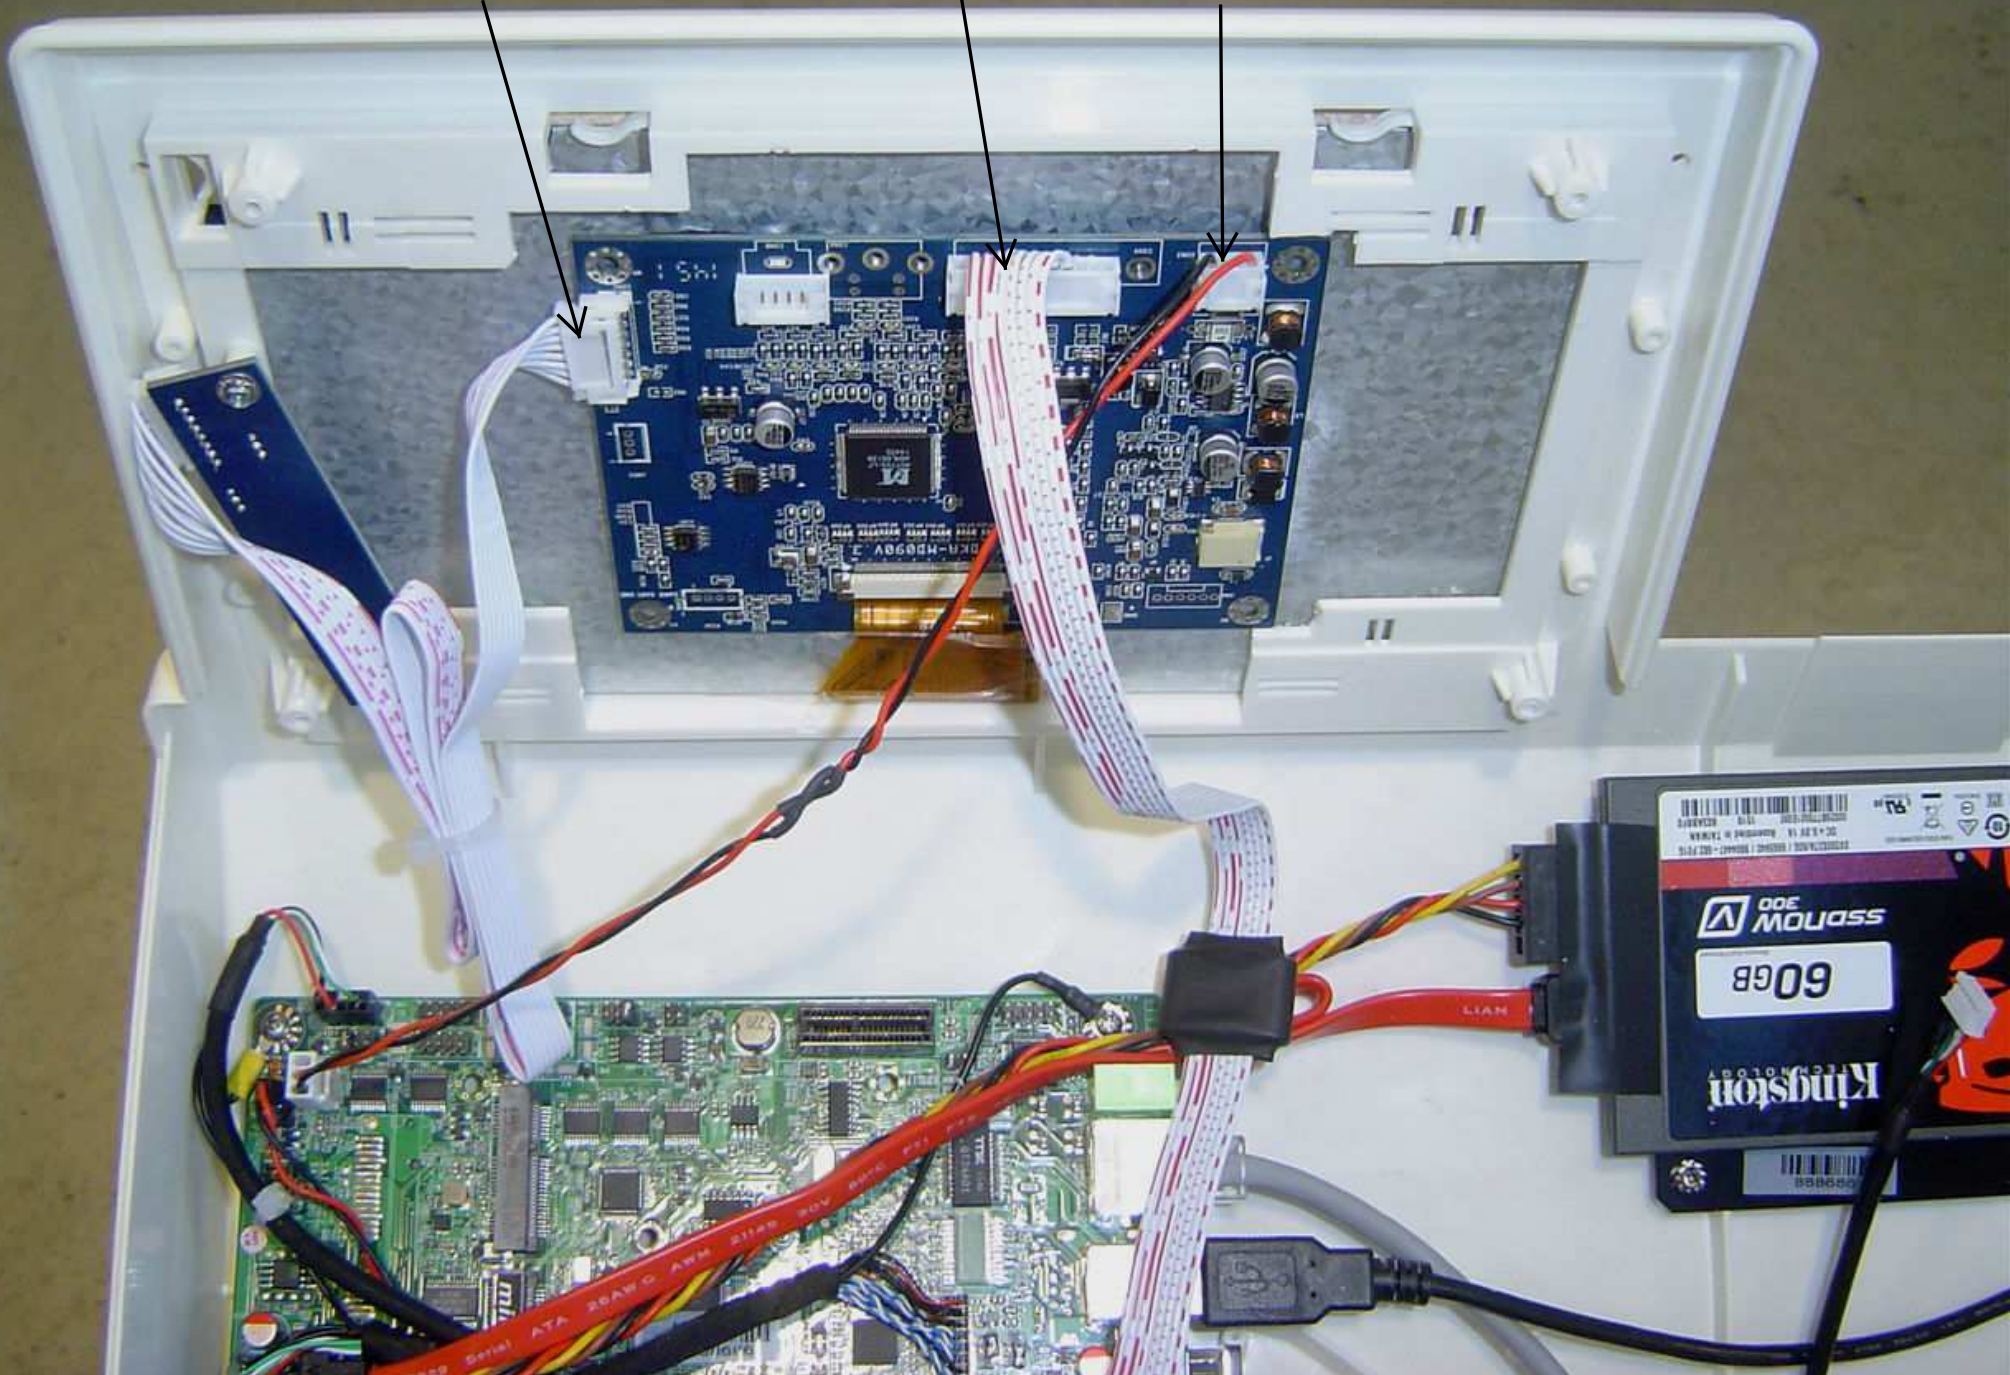


PASTE THE COVER P/N.-  
70005210 AT CORRECT  
POSITION




# 14.- ASSEMBLY UP CONSOLE AND FRONT 12" TOUCH SCREEN (COMPONENTS )

P/N.-  
71004495

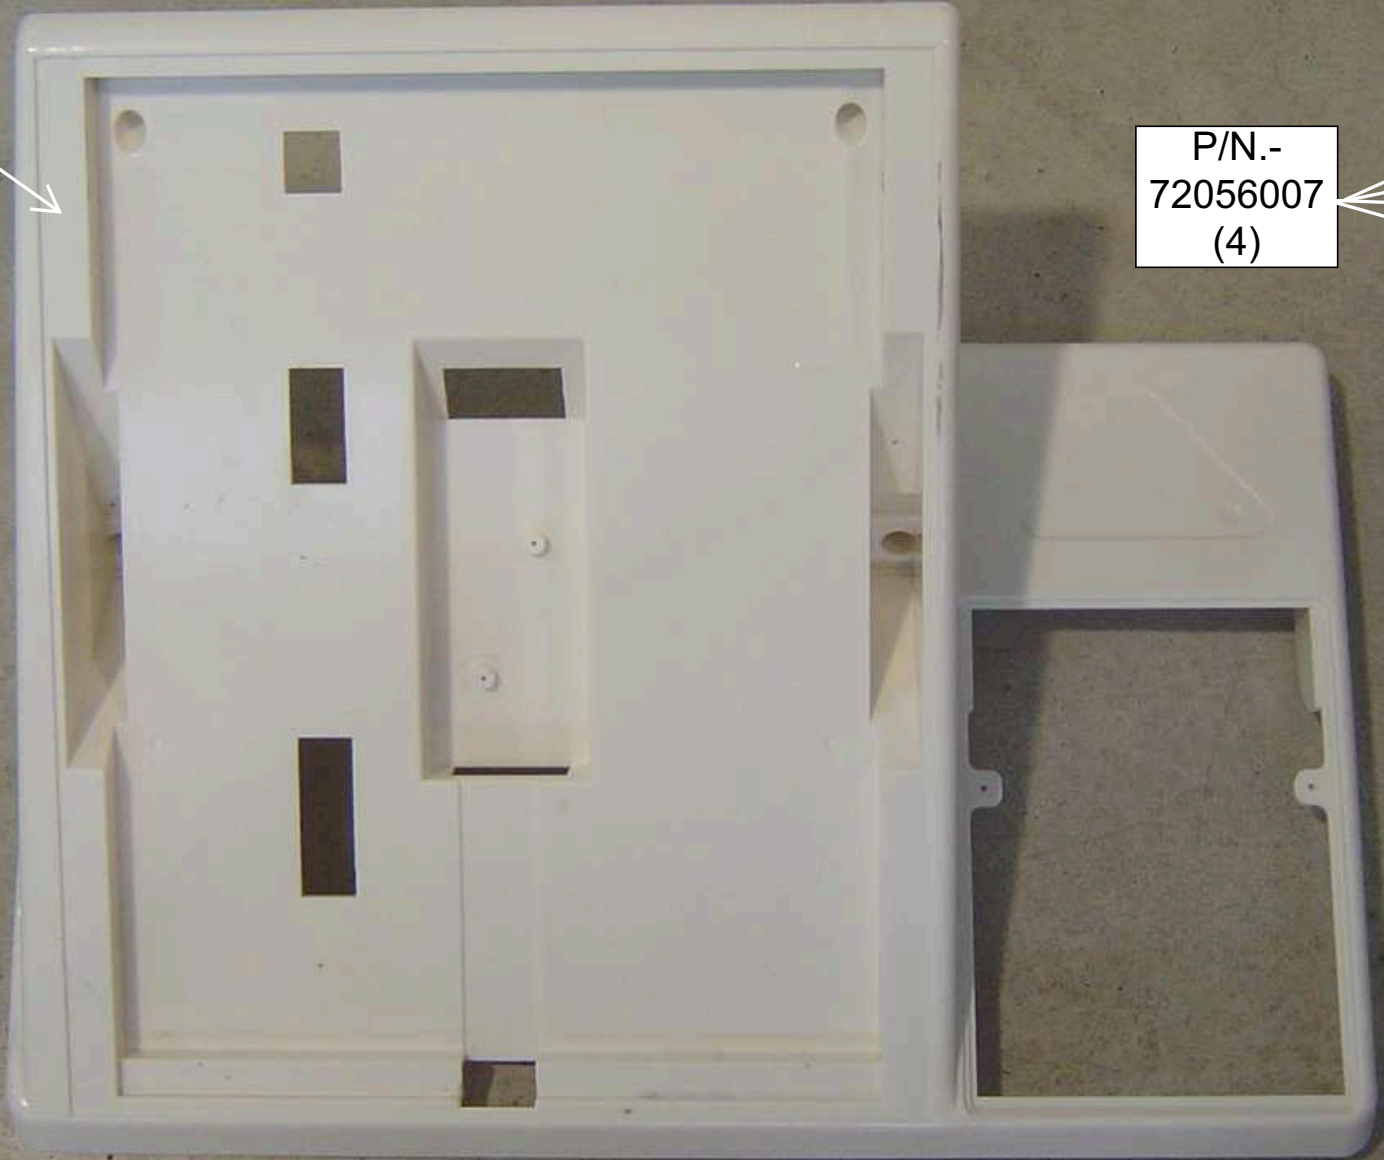


P/N.-  
72056007  
(4)

# 14.- ASSEMBLY UP CONSOLE AND FRONT 12" TOUCH SCREEN (COMPONENTS )





TO HOLD THE  
TOUCH  
CONTROL  
BOARD P/N.-  
19087300 TO  
UP CONSOLE  
WITH 2  
SCREWS P/N.-  
72056002

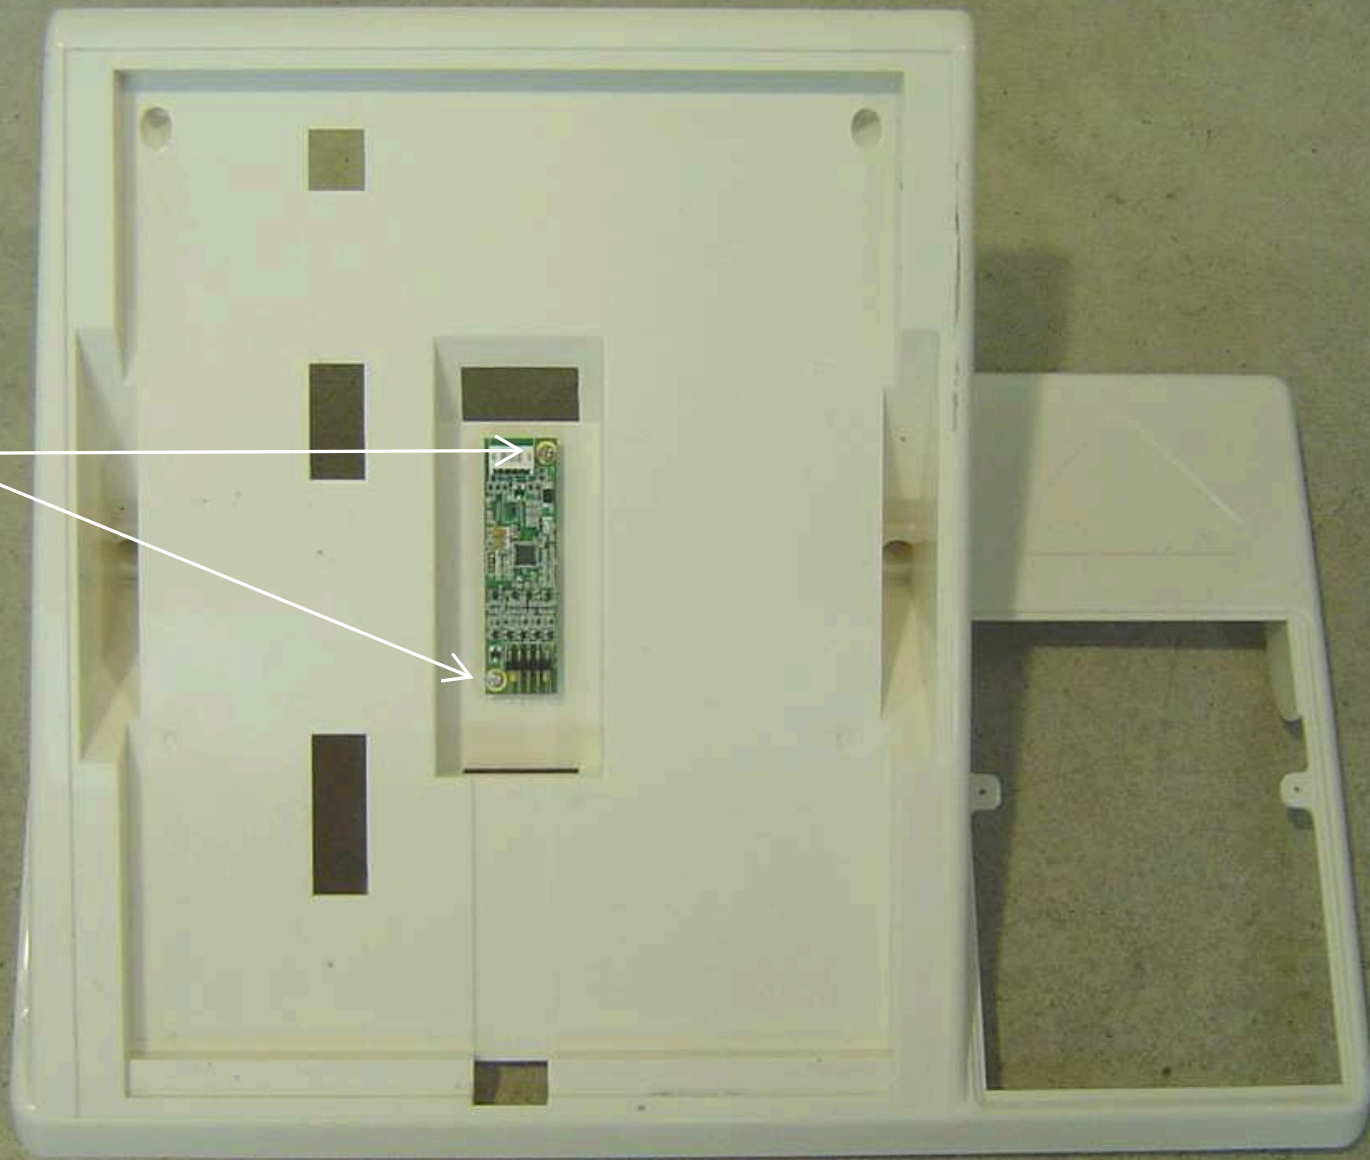


ASSEMBLYUP CONSOLE  
AND HOLD WITH 4 SCREWS  
P/N.- 72056007

PASS THE  
POWER  
MONITOR  
CABLE P/N.-  
90114078  
FOR THE  
HOLE

CONNECT  
THE CABLE  
P/N.-  
90114079

PASS THE LVDS  
CABLE P/N.-  
90114067 FOR  
THE HOLE

CABLE USB PRINTER AND  
POWER PRINTER OUT OF  
THE PRINTER HOLE

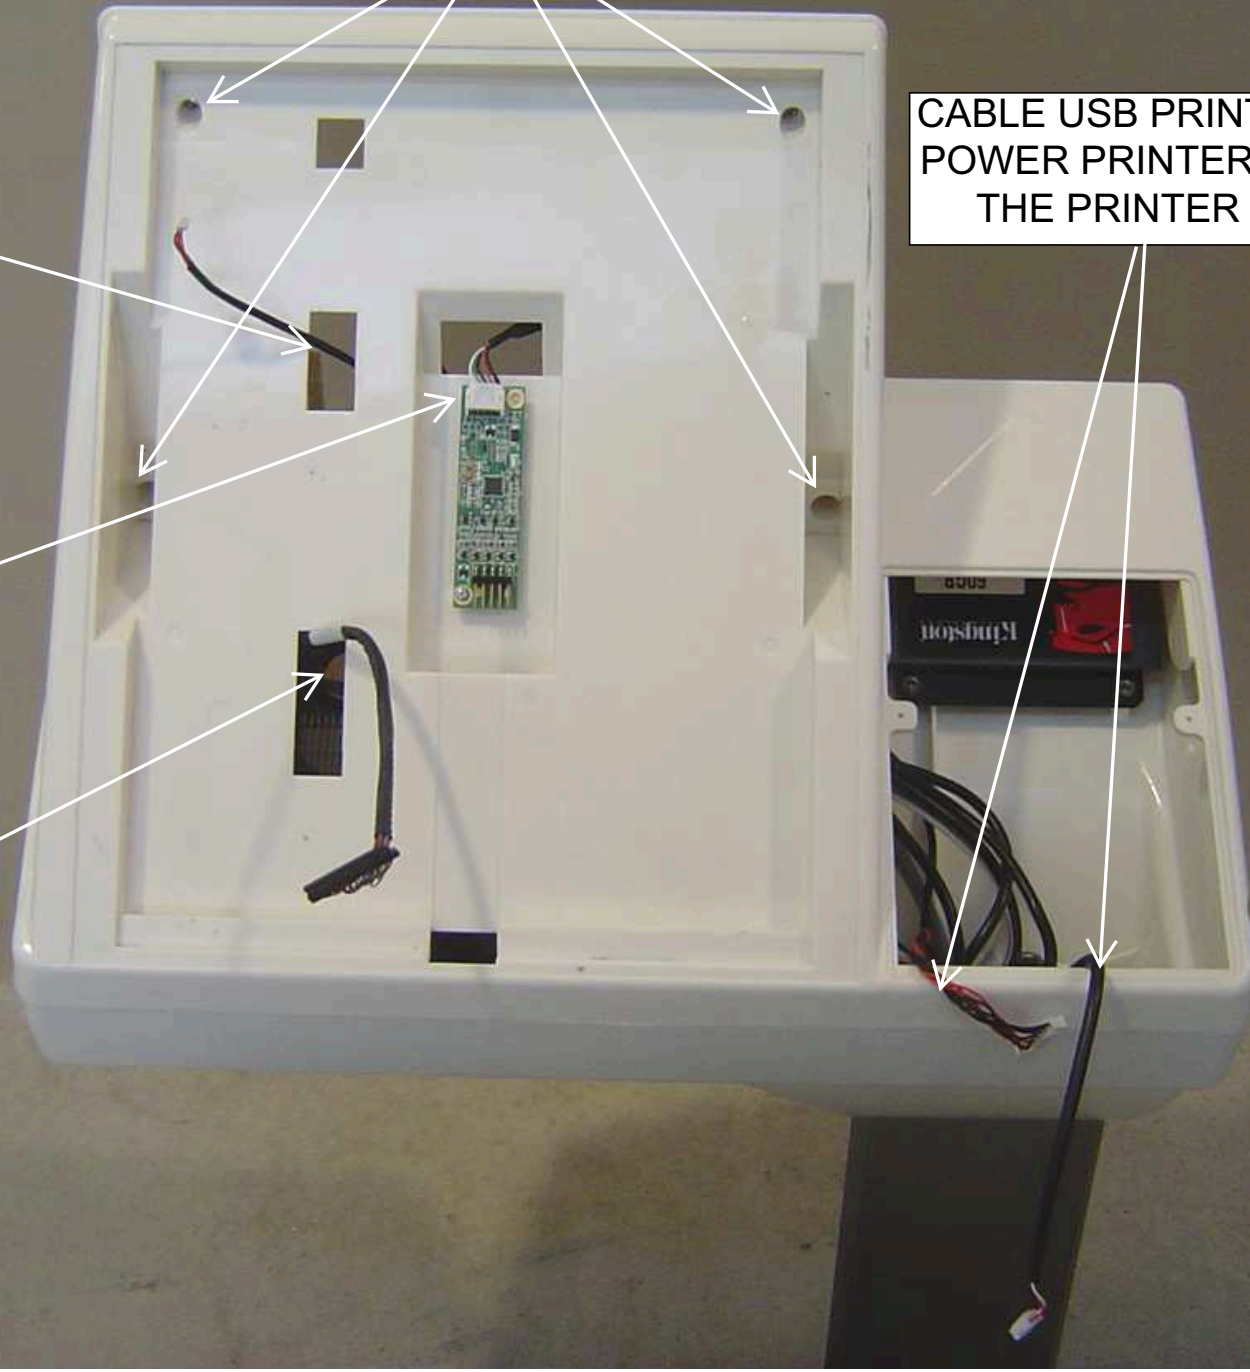


CONNECT THE  
POWER CABLE TO  
THE MONITOR

CONNECT THE TOUCH  
ON THE CONTROL  
BOARD. (SEE NEXT  
PICTURE )

CONNECT THE  
CABLE TO THE  
MONITOR

CONNECT THE  
CABLE ON  
BOARD

BE THE TOUCH IN  
THIS POSITION, WITH  
THE CABLE TO THE  
INSIDE SIDE AS  
SHOW IN THIS  
PICTURE

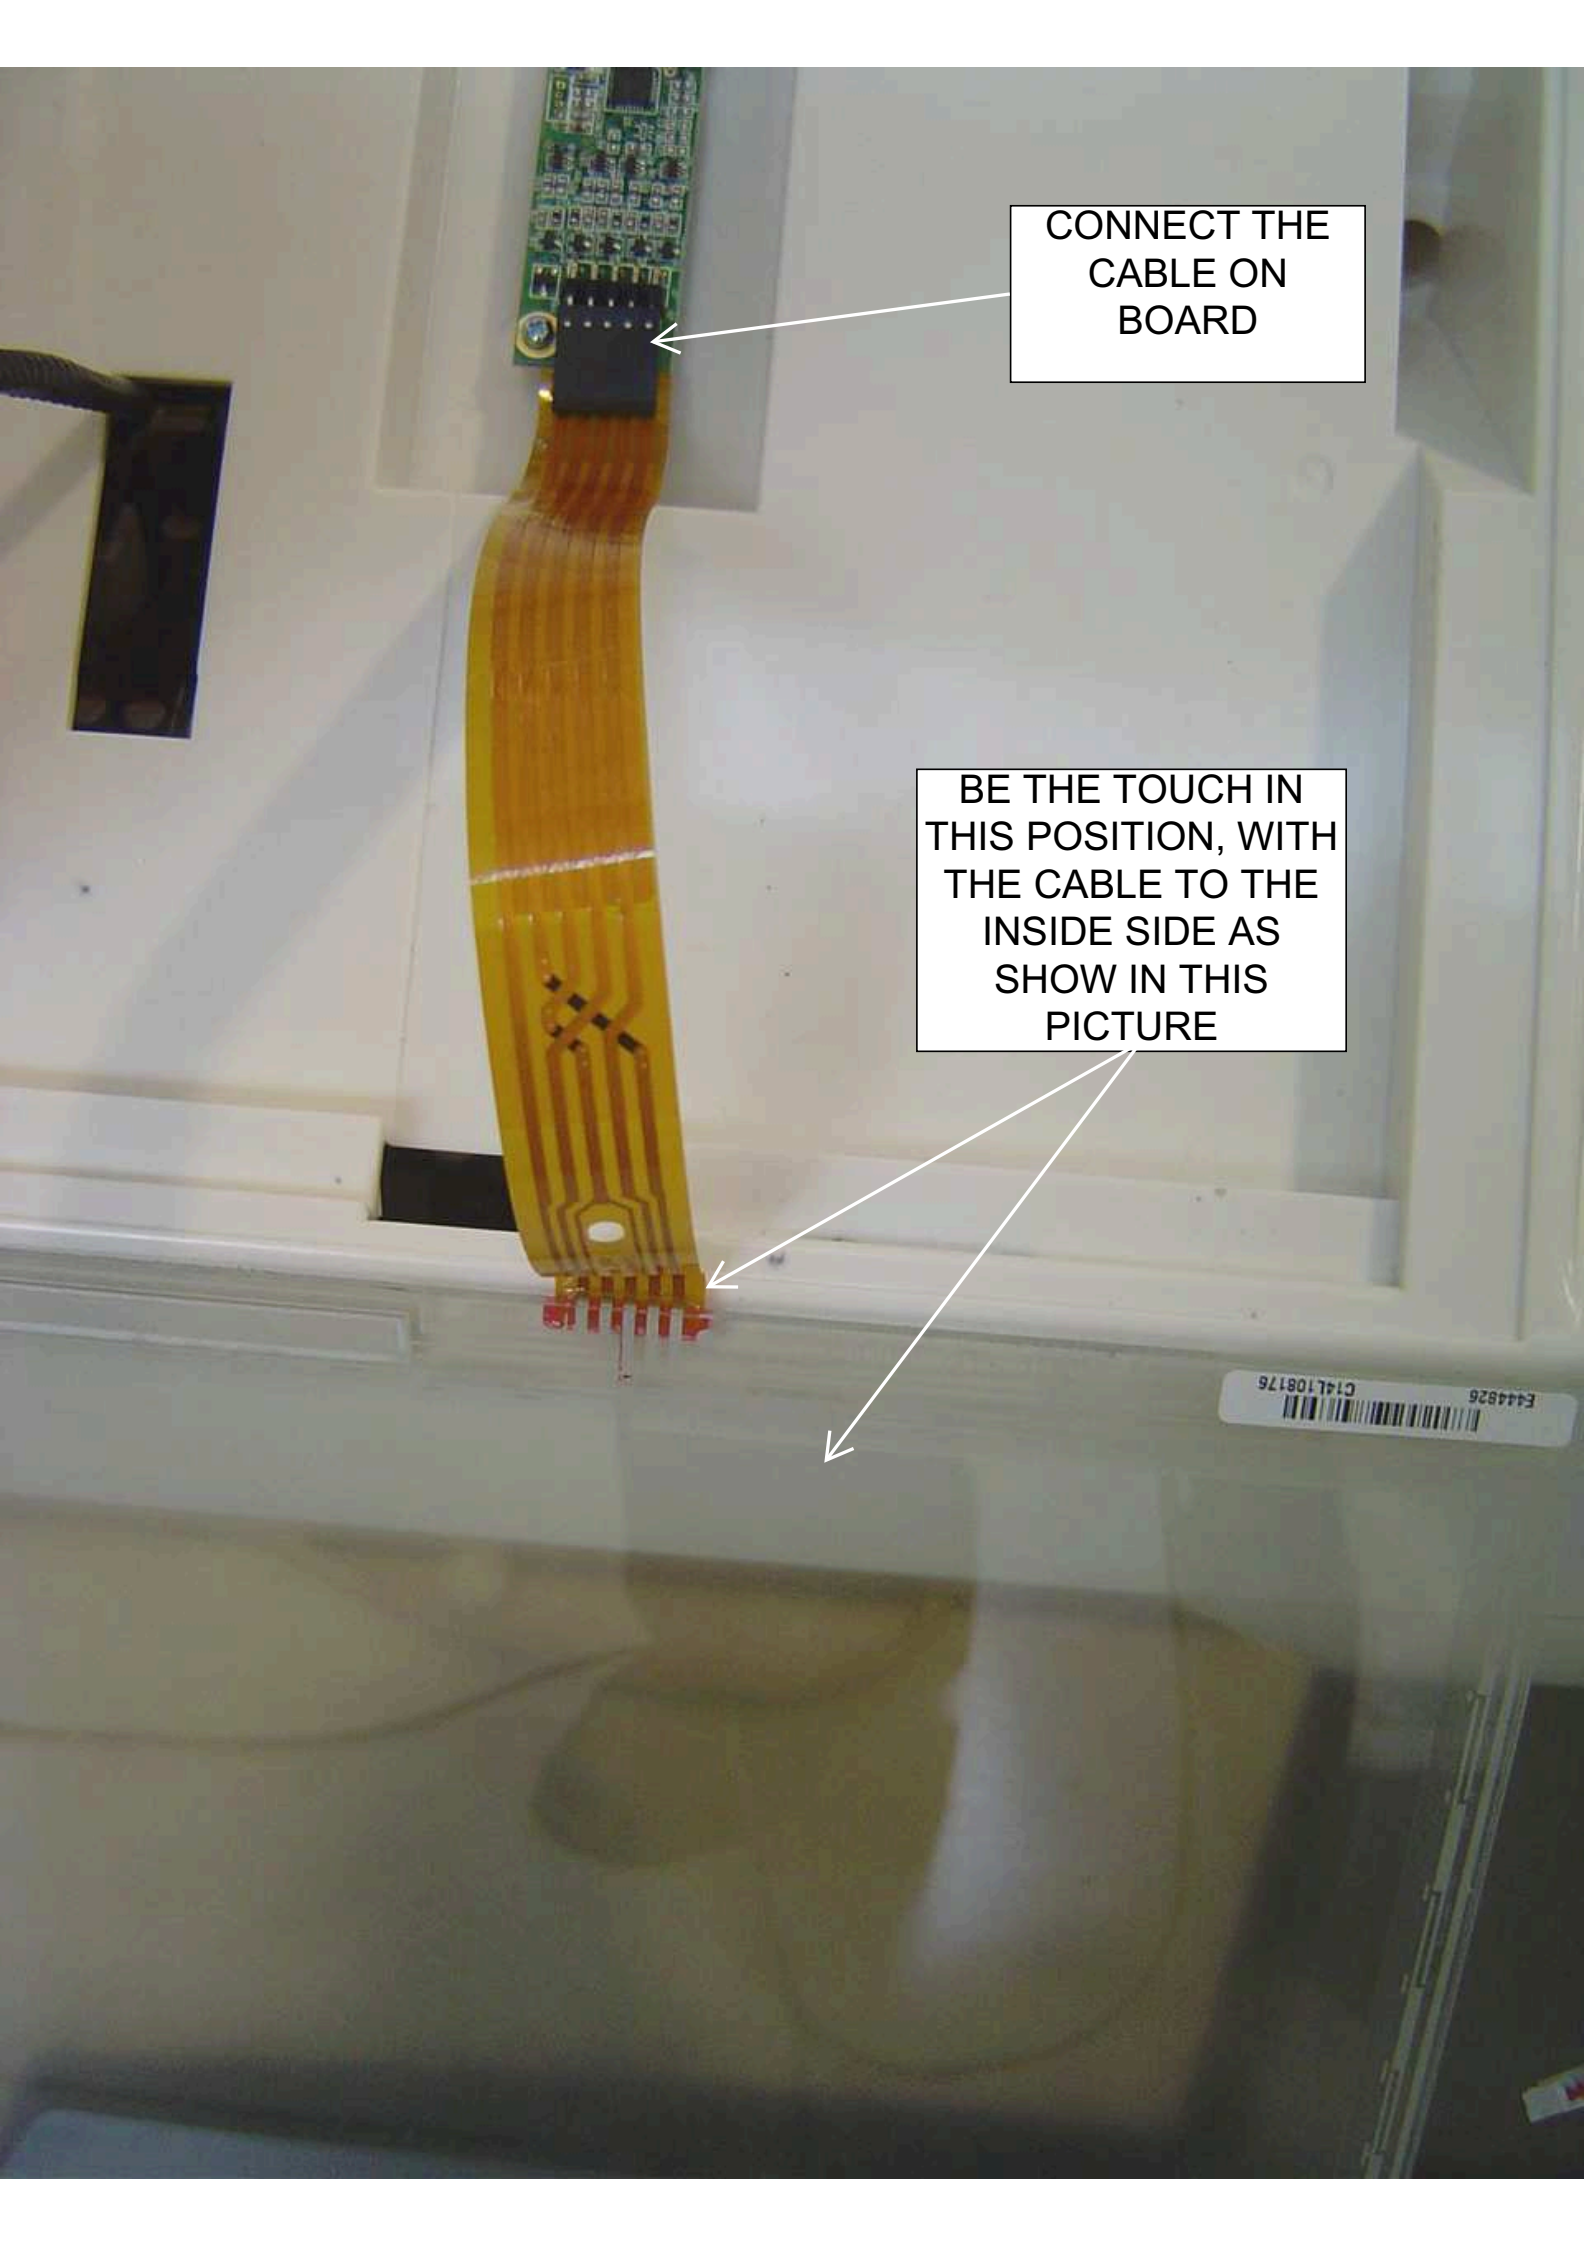

GENERAL VIEW




PUT THE MONITOR  
AND UP PUT THE  
TOUCH SCREEN




INSERT THE  
SURPLUS  
CABLE FOR  
THE HOLE

# 15.- ASSEMBLY SET PRINTER (COMPONENTS)

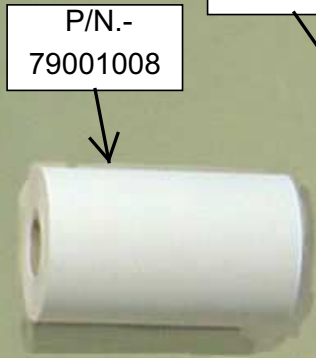


P/N.-  
79001008


P/N.-  
73100002




P/N.-  
72059007  
(2)



P/N.- 72056002  
(4)




P/N.-  
72200009 (2)

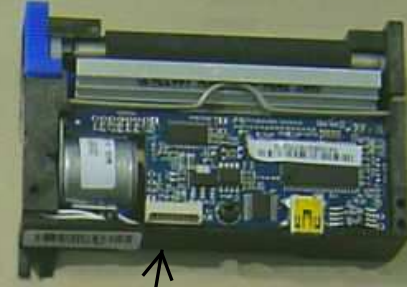

P/N.- 98001057

P/N.- 19085834



P/N.-  
90113930

P/N.-  
90113932




P/N.-  
71004455



P/N.-  
71004457




P/N.-  
71001710

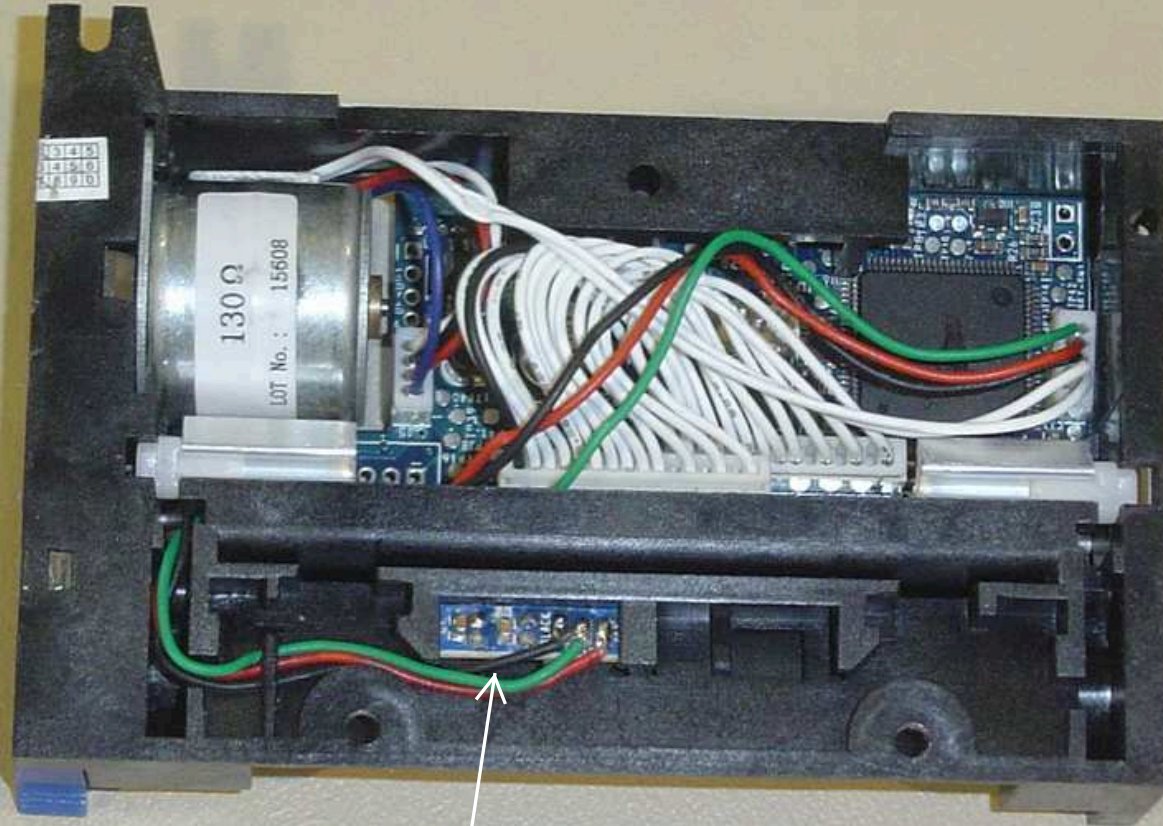


VERIFY THAT THE  
DETECTOR PAPER IS  
IN THIS POSITION . IF  
NOT, PUT IT IN THIS  
POSITION




PASTE THE  
STICK P/N.-  
70000456

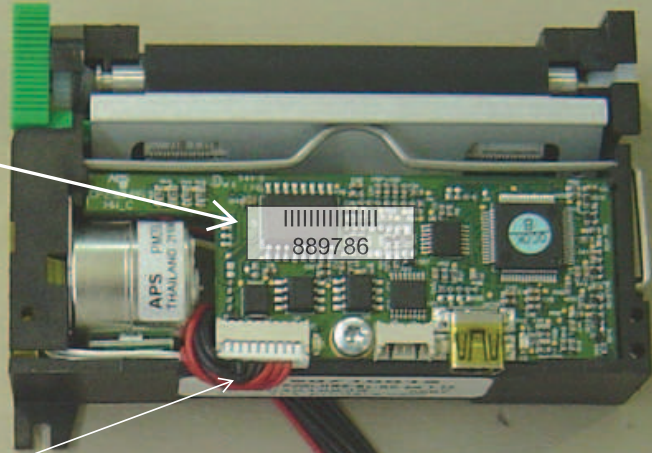


PASS THE  
CABLE P/N.-  
90113932  
THROUGH THE  
HOLE AND  
CONNECT TO  
PRINTER

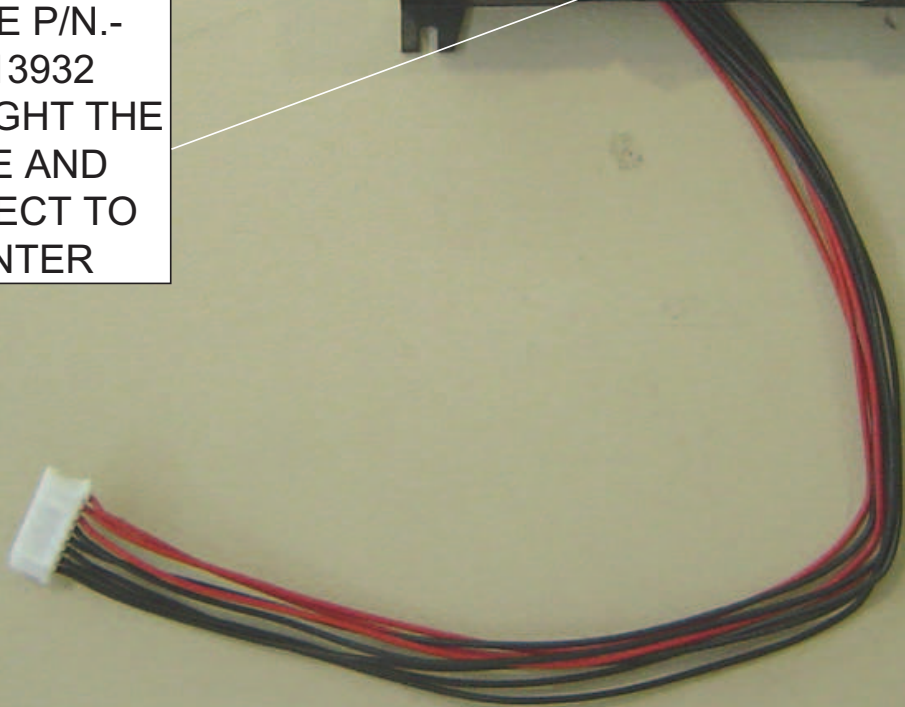

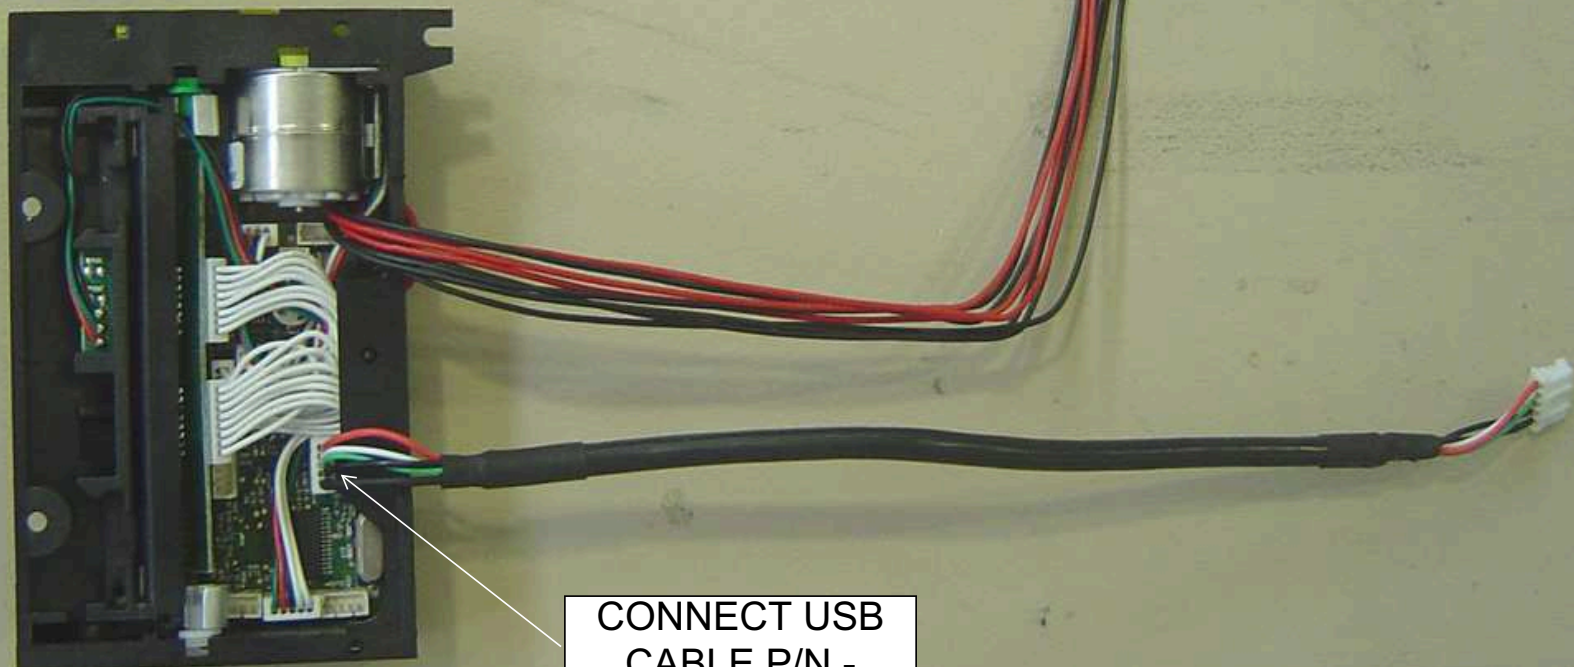

CONNECT USB  
CABLE P/N.-  
90113930


PUT PRINTER IN SUPPORT  
AND HOLD WITH TWO  
SCREWS P/N.- 72056002

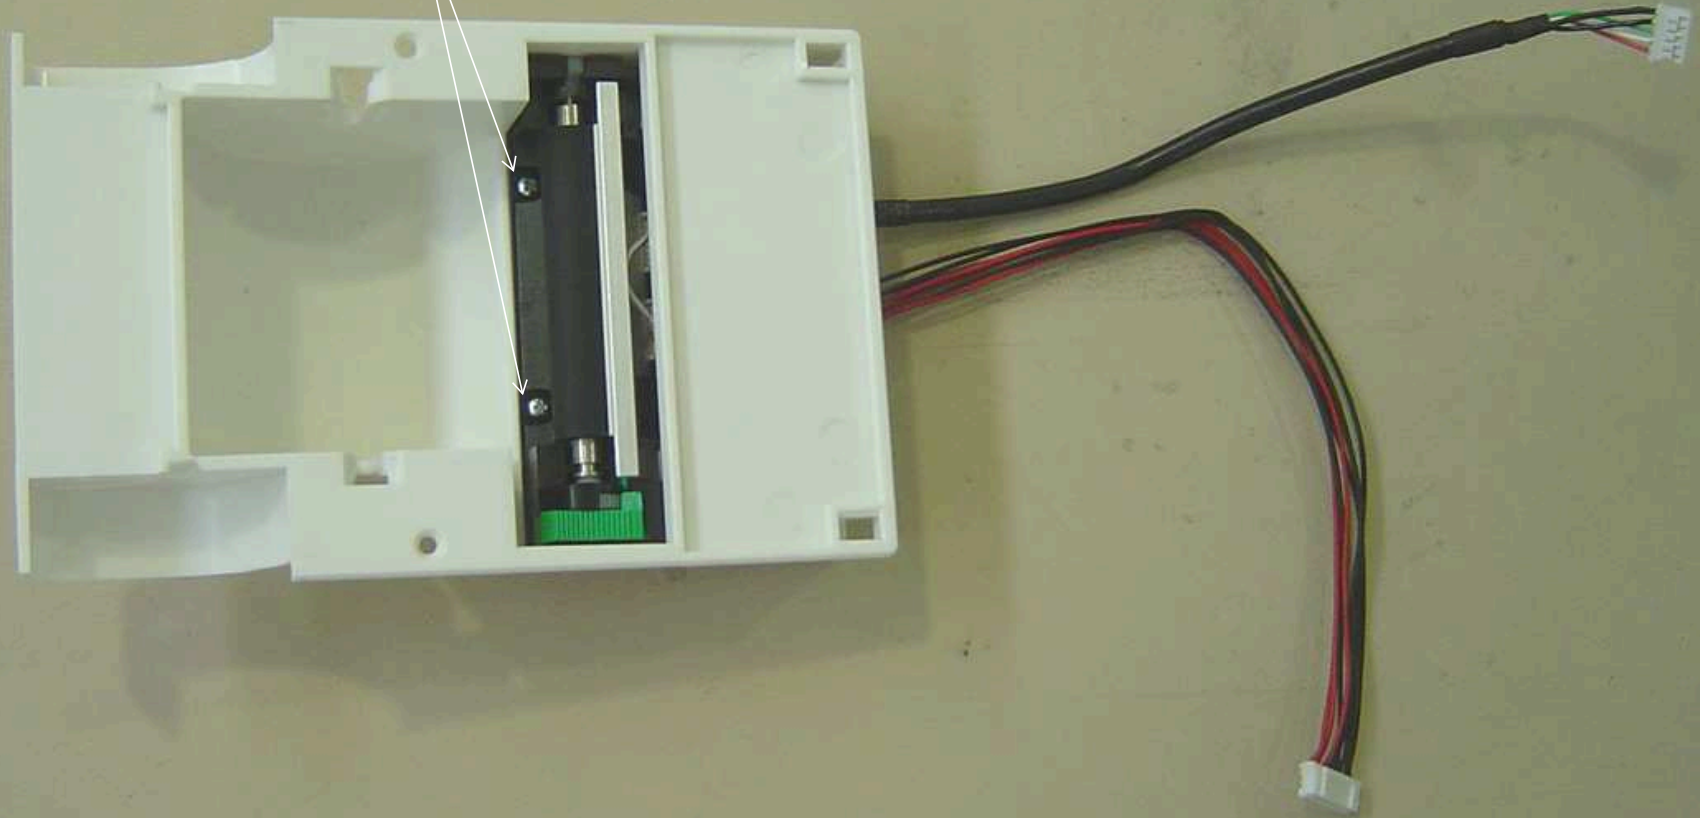


HOLD THE BOARD  
WITH 2 WHASERS  
P/N 72200009 AND  
2 SCREWS P/N  
72056002

CONNECT  
CABLES TO  
BOARD

HOLD THE  
CABLE WITH THE  
FLANGE

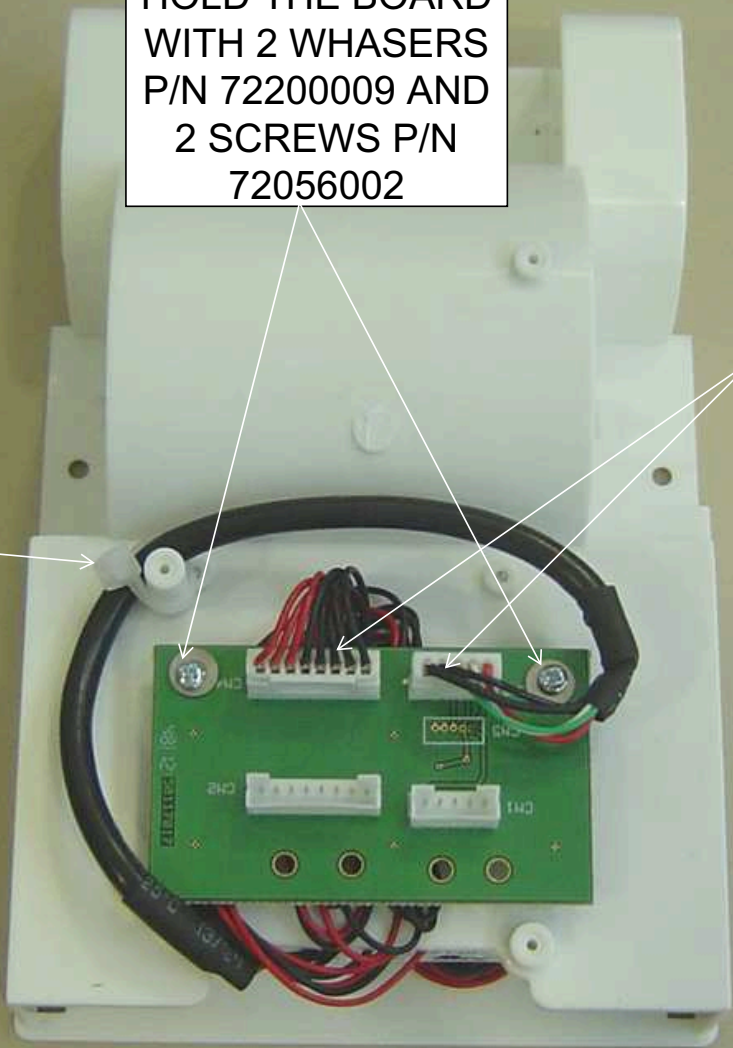

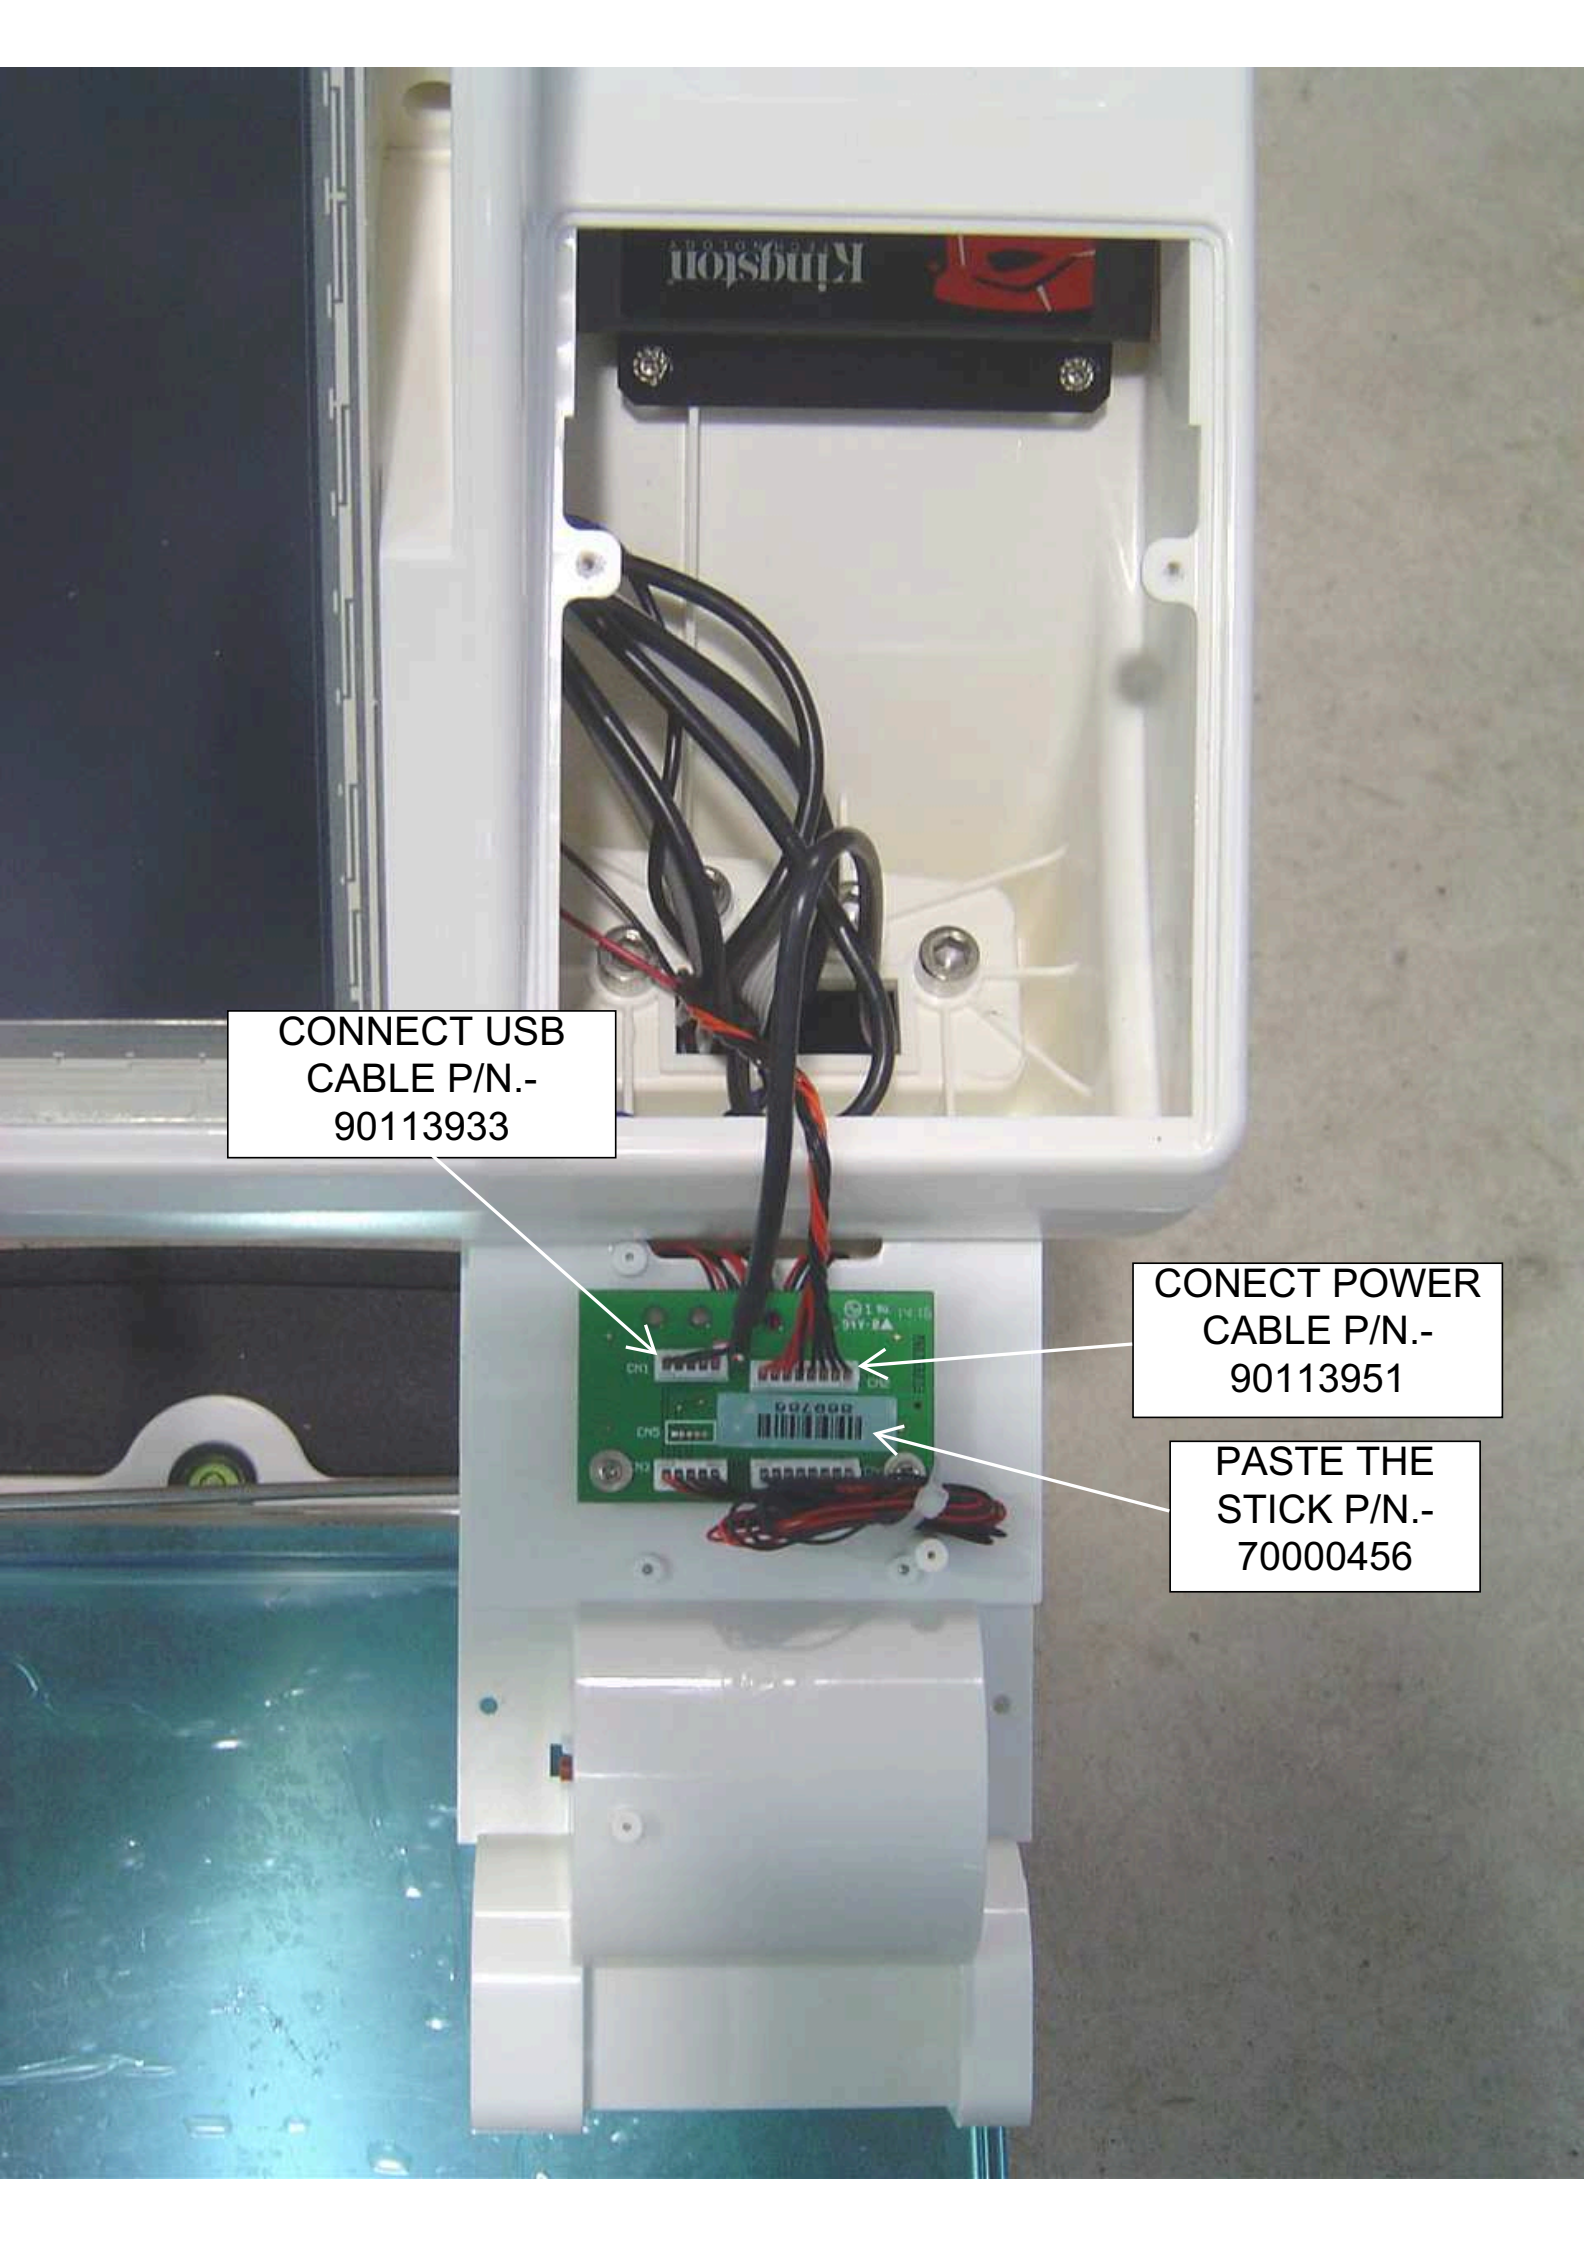


CONNECT USB  
CABLE P/N.-  
90113933

CONECT POWER  
CABLE P/N.-  
90113951


PASTE THE  
STICK P/N.-  
70000456

ASSEMBLY PAPER  
PRINTER ROLL P/N.-  
79001008 WITH THE  
AXE P/N.- 71001710

ASSEMBLY SUPPORT  
PRINTER IN HOLE AND  
HOLD WITH 2 SCREWS P/N.-  
72059007

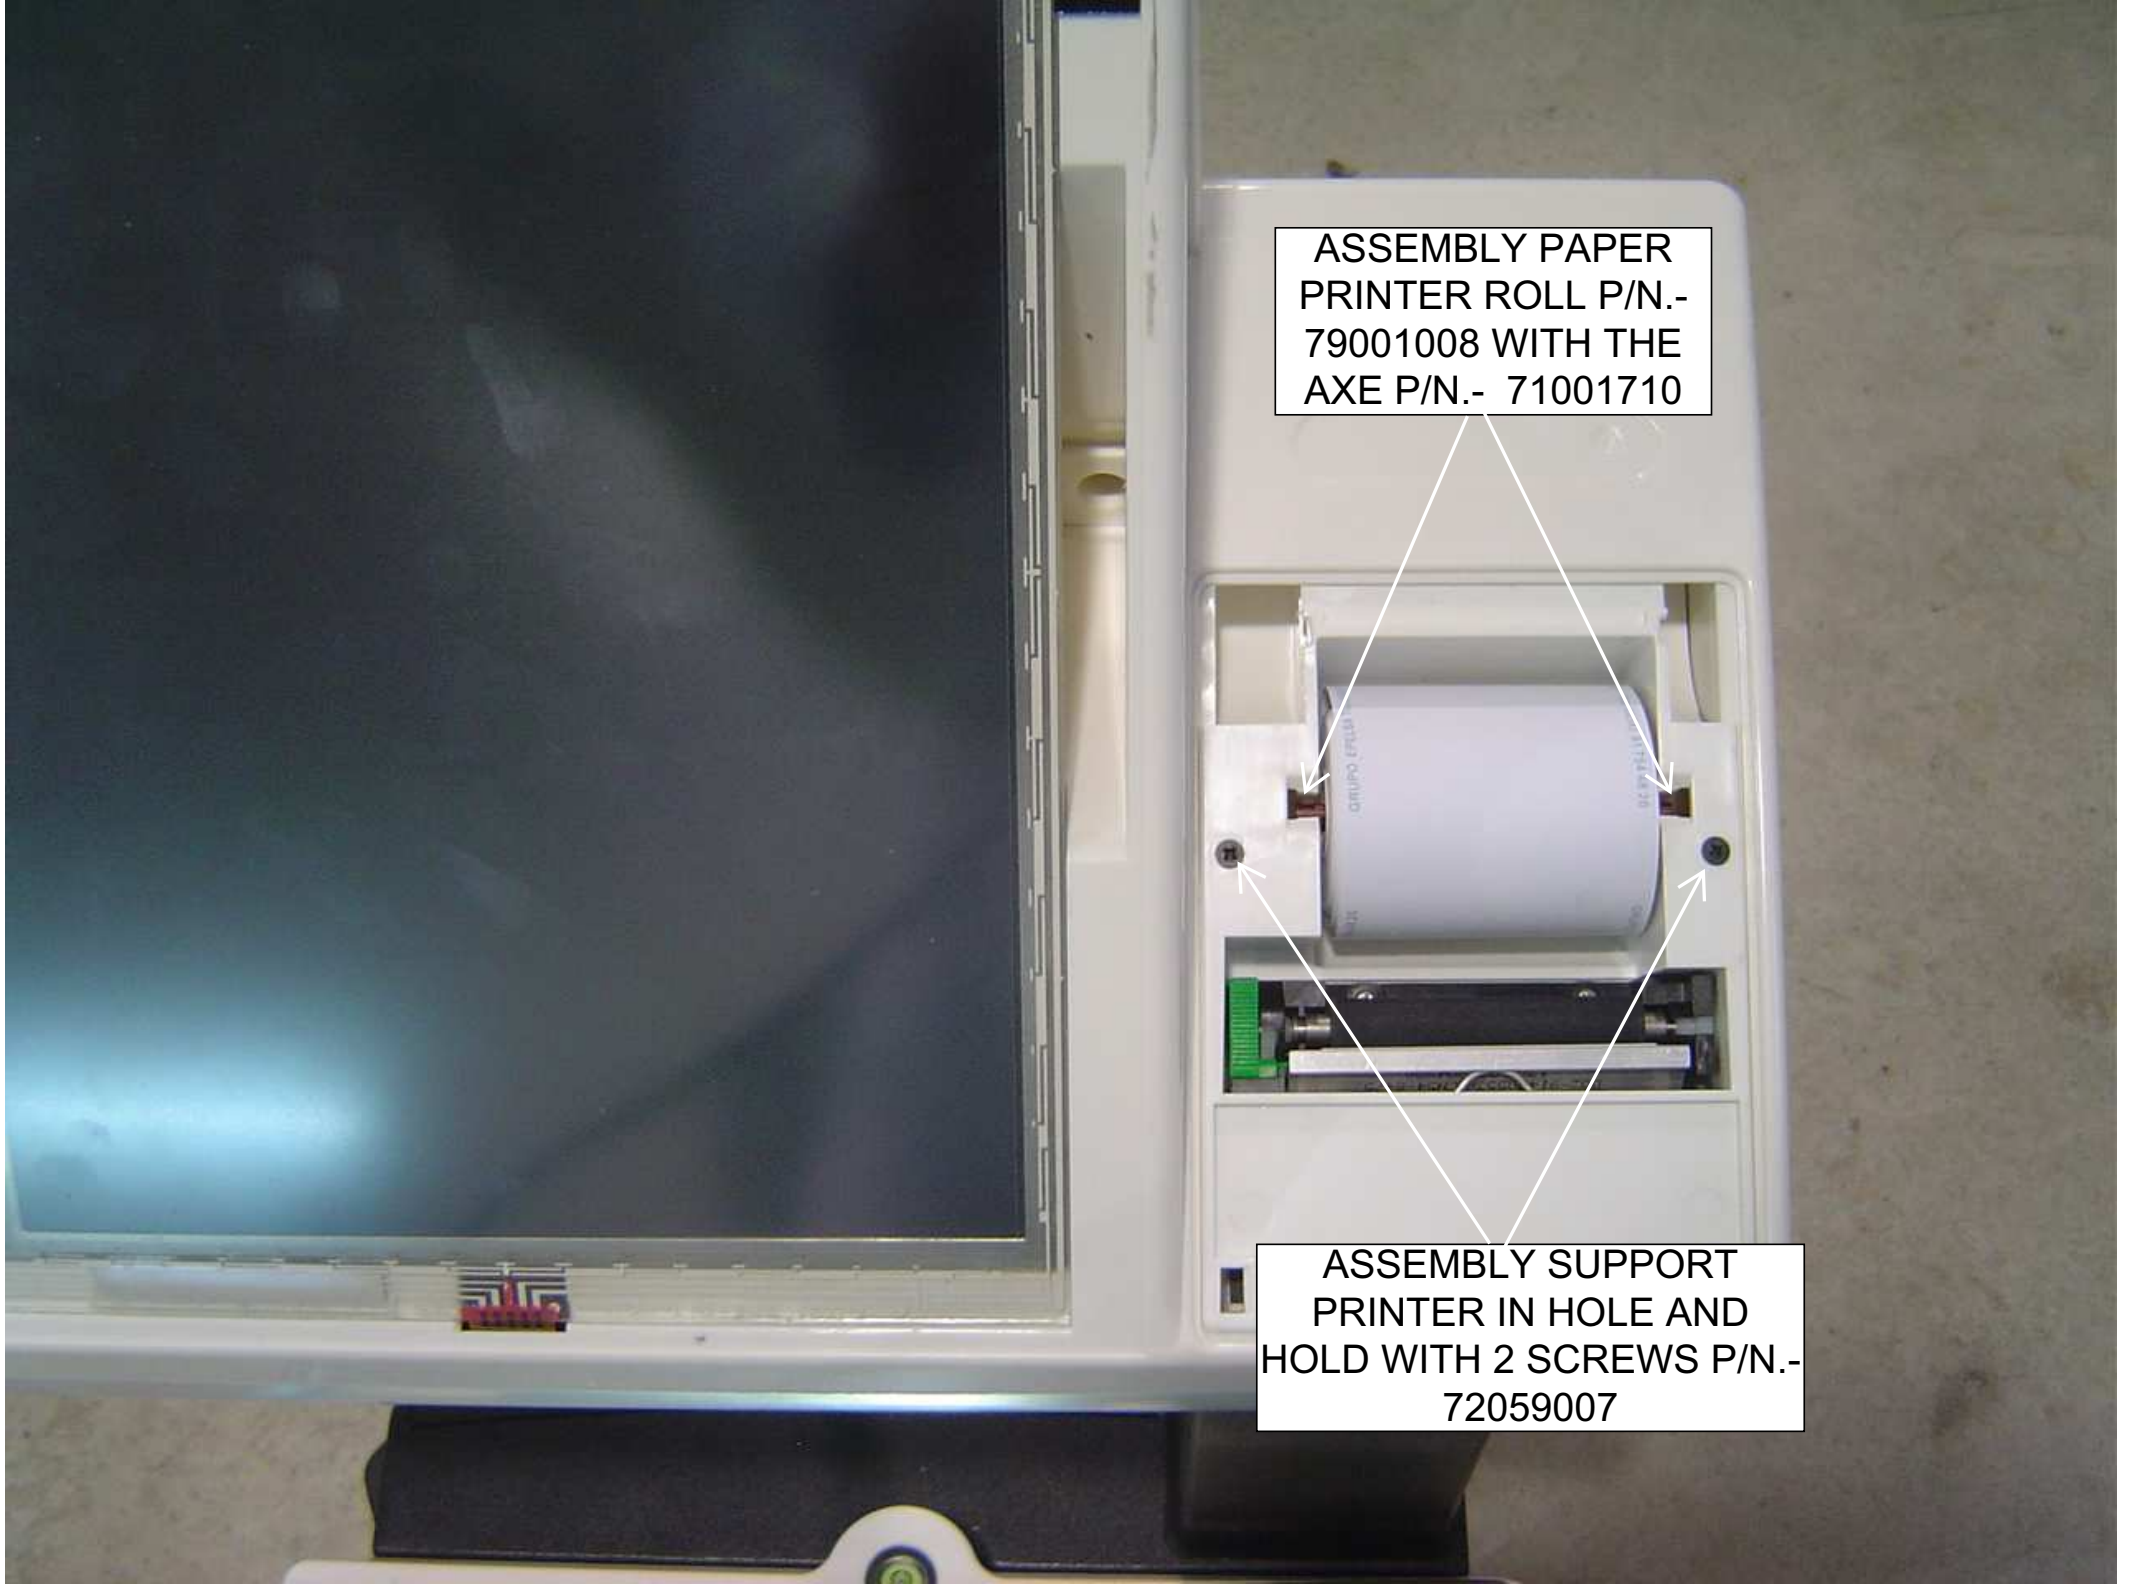


ASSEMBLY  
PRINTER  
COVER P/N.-  
71004455 OR  
71004476

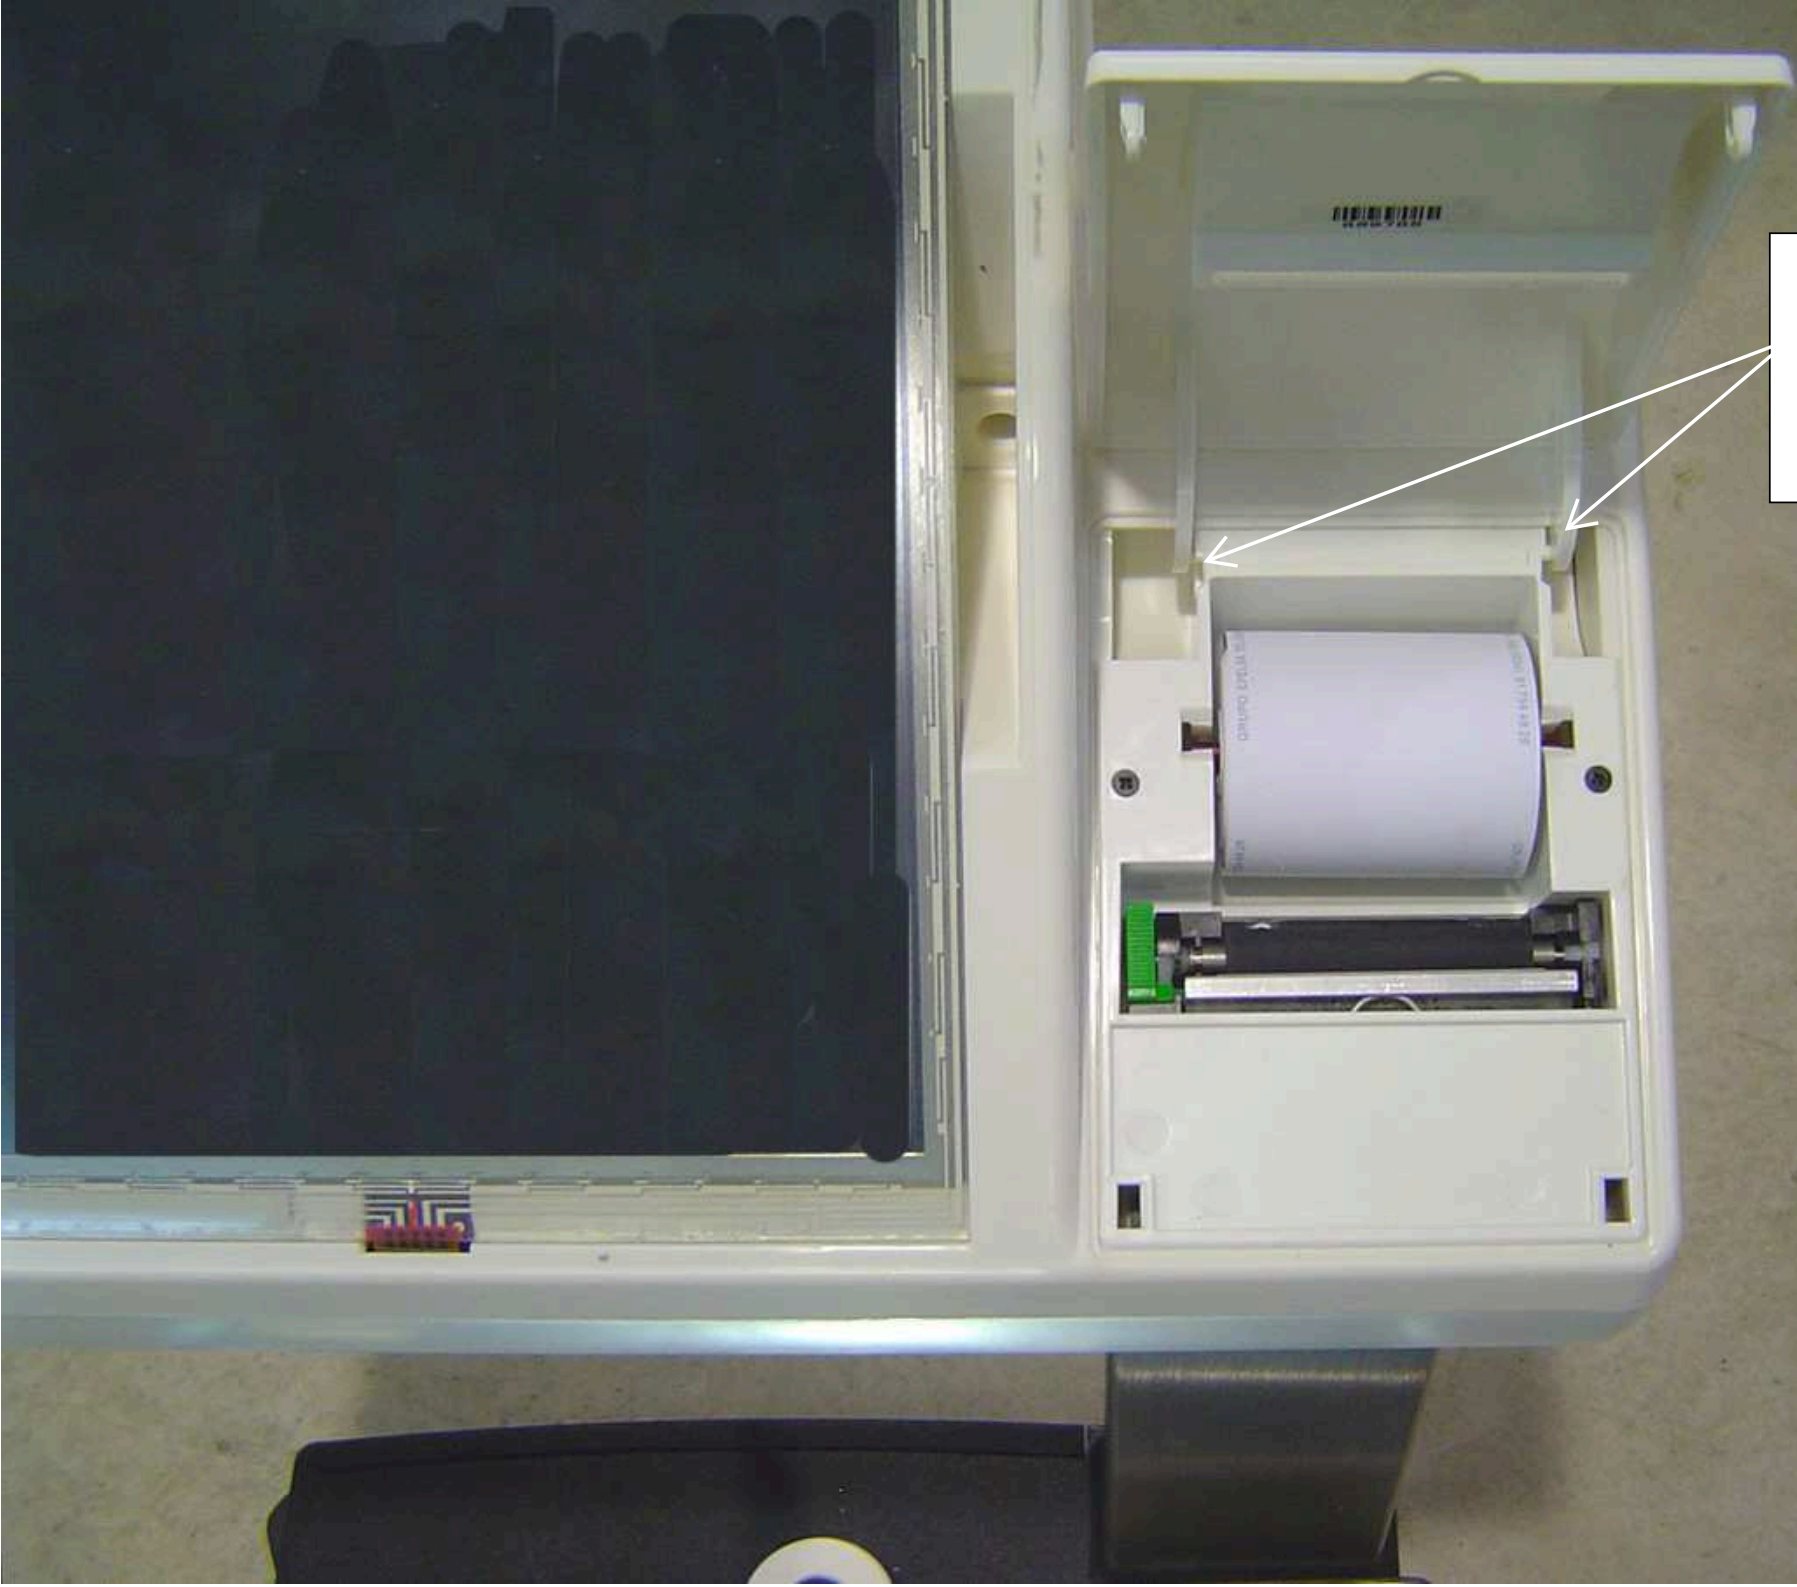

## 16.- ASSEMBLY COVER AND FINISH (COMPONENTS)

PLIERS FOR  
SEALING

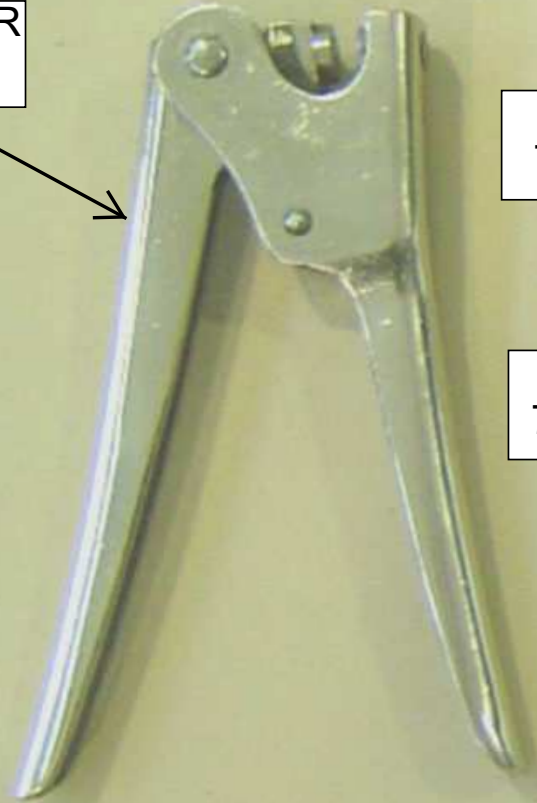

P/N.-  
70000868



P/N.-  
70010374



SEAL CABLE P/N.-  
79500137 (100mm)



PLASTIC  
SEAL P/N.-  
79000016






## 16.- ASSEMBLY COVER AND FINISH (COMPONENTS)

P/N.-  
70005220



PASTE THE NAME PLATE P/N.-  
70010374 AND PASTE UP THE  
PROTECTOR P/N.- 70000868



MODEL: 11111111111111111111  
PC-40°C Input: 120V/220V Serial: 851000  
Max 15kg Min 0.5kg  
T x 0.0000 x x x x  
CE13-0122

PUT THE CABLE SEAL P/N.-  
79500137 AND SEAL P/N.-  
79000016, USING PLIERS  
FOR SEALING, AFTER  
CHECK THE SCALE



REMOVE PLASTIC PROTECTOR TOUCH SCREEN ON THE EDGE, TO AVOID PASTE WITH THE COVER, AND PASTE THE COVER OF SCREEN

