


Cette procédure nécessite un clavier USB et une connexion internet

Connecter et allumer l'imprimante

Télécharger le fichier d'installation : <https://www.exa-france.com/LL/K-SCALE/Drivers/HPLIP/hplip-3.18.6.run> ou directement depuis le lien du fabricant https://sourceforge.net/projects/hplip/files/hplip/3.18.6/hplip-3.18.6.run/download?use_mirror=nhc


Déposer le fichier d'installation dans le dossier INSTALL de la balance :

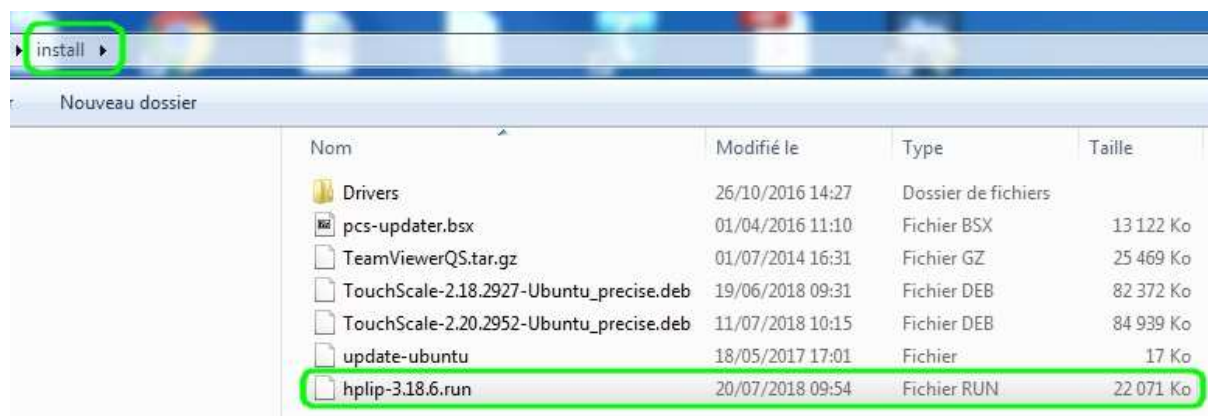

Ouvrir un terminal (**CTRL+ALT+T**)

Changer de dossier actif vers INSTALL : **cd install**

Demander l'exécution du setup : **sh hplip-3.18.6.run**

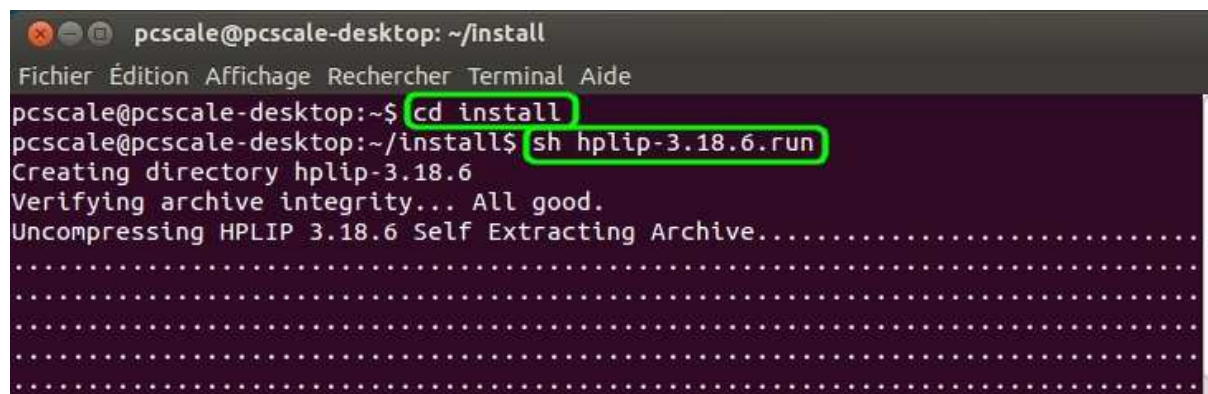

Choisir le mode automatic (a) :

```
pcscale@pcscale-desktop: ~/install
Fichier  Édition  Affichage  Rechercher  Terminal  Aide

HP Linux Imaging and Printing System (ver. 3.18.6)
HPLIP Installer ver. 5.1

Copyright (c) 2001-15 HP Development Company, LP
This software comes with ABSOLUTELY NO WARRANTY.
This is free software, and you are welcome to distribute it
under certain conditions. See COPYING file for more details.

Installer log saved in: hplip-install_Tue-31-Jul-2018_09:26:34.log

\
note: Defaults for each question are maked with a '*'. Press <enter> to accept t
he default.

INSTALLATION MODE
-----
Automatic mode will install the full HPLIP solution with the most common options
.
Custom mode allows you to choose installation options to fit specific requiremen
ts.

Please choose the installation mode (a=automatic*, c=custom, q=quit) : █
```

La détection du système d'exploitation demande confirmation (y) :

```
INTRODUCTION
-----
This installer will install HPLIP version 3.18.6 on your computer.
Please close any running package management systems now (YaST, Adept, Synaptic,
Up2date, etc).

DISTRO/OS CONFIRMATION
-----
Distro appears to be Ubuntu 12.04.

Is "Ubuntu 12.04" your correct distro/OS and version (y=yes*, n=no, q=quit) ?
```

Valider l'installation du profil de sécurité (y)

```
SECURITY PACKAGES
-----
AppArmor is installed.
AppArmor protects the application from external intrusion attempts making the ap
plication secure

Would you like to have this installer install the hplip specific policy/profile
(y=yes*, n=no, q=quit) ? █
```

Valider l'installation des dépendances requises (y) :

```
MISSING DEPENDENCIES
-----
Following dependencies are not installed. HPLIP will not work if all REQUIRED de
pendencies are not installed and some of the HPLIP features will not work if OPT
IONAL dependencies are not installed.
Package-Name      Component      Required/Optional
reportlab         fax           OPTIONAL
Do you want to install these missing dependencies (y=yes*, n=no, q=quit) ? █
```

L'installation peut durer quelques minutes en fonction du nombre de dépendances à télécharger, de l'état de la connexion etc. :

```
INSTALL MISSING OPTIONAL DEPENDENCIES
-----
note: Installation of dependencies requires an active internet connection.
warning: Missing OPTIONAL dependency for option 'fax': reportlab (Reportlab - PD
F library for Python)

CHECKING FOR NETWORK CONNECTION
-----
Network connection present.

RUNNING PRE-PACKAGE COMMANDS
-----
sudo dpkg --configure -a (Pre-depend step 1)
sudo apt-get install --yes --force-yes -f (Pre-depend step 2)
█
```

Valider la désinstallation de la version antérieure du HPLIP (i) :

```
DEPENDENCY AND CONFLICT RESOLUTION
-----
Running 'sudo apt-get install --assume-yes python-reportlab'
Please wait, this may take several minutes...
HPLIP-3.16.9 exists, this may conflict with the new one being installed.
Do you want to ('i'= Remove and Install*, 'q'= Quit)? █
```

Inutile de valider la vérification des mises à jour (n) :

```
CLOSE HP_SYSTRAY
-----
Sending close message to hp-systray (if it is currently running)...
OK

HPLIP UPDATE NOTIFICATION
-----
Do you want to check for HPLIP updates?. (y=yes*, n=no) : █
```

Choisir la déconnexion/reconnexion de l'imprimante pour la détecter (p) :

```
RESTART OR RE-PLUG IS REQUIRED
-----
If you are installing a USB connected printer, and the printer was plugged in
when you started this installer, you will need to either restart your PC or
unplug and re-plug in your printer (USB cable only). If you choose to restart,
run this command after restarting: hp-setup (Note: If you are using a parallel
connection, you will have to restart your PC. If you are using network/wireless,
you can ignore and continue).

Restart or re-plug in your printer (r=restart, p=re-plug in*, i=ignore/continue,
q=quit) : █
```


Déconnecter puis reconnecter le câble USB puis appuyer sur ENTREE.

Choisir ensuite le mode GUI pour configurer l'imprimante (u) :

```
Restart or re-plug in your printer (r=restart, p=re-plug in*, i=ignore/continue,
q=quit) : p
Please unplug and re-plug in your printer now. Press <enter> to continue or 'q'
to quit:

PRINTER SETUP
-----
Please make sure your printer is connected and powered on at this time.
Do you want to setup printer in GUI mode? (u=GUI mode*, i=Interactive mode) : █
```

Vérifier que la connexion est bien USB puis cliquer sur NEXT :

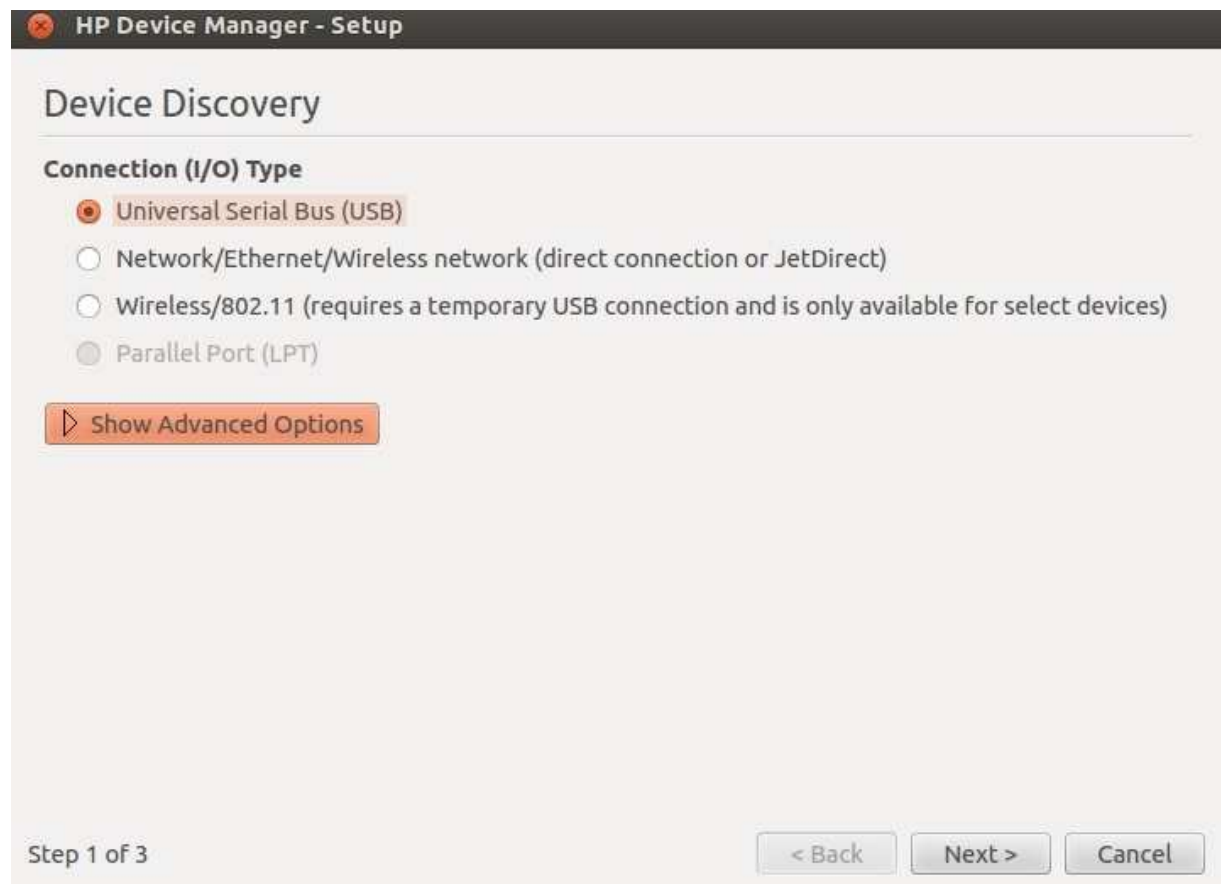

Cliquer sur NEXT puis enfin ADD PRINTER

HP Device Manager - Setup

Select From Discovered Devices

	Model	Device URI
1	HP LaserJet m101-m106	hp:/usb/HP_LaserJet_M101-M106?serial=VNF3946185

1 device found. Click *Next* to continue.

Refresh

Step 2 of 3

< Back Next > Cancel

HP Device Manager - Setup


Setup Device

Printer Setup

Printer name:

Description:

Location:

PPD file: 

Fax Setup

Fax name:

Fax number: Name/company:

Description:

Location:

Send test page to printer

Step 3 of 3

< Back Add Printer Cancel

L'imprimante est désormais installée avec les pilotes à jour pour ce matériel :

